

Specification of Lithium-ion Cylindrical Rechargeable Battery

Product Type Lithium-ion Cylindrical Rechargeable Battery

Battery Model ZN18650

Product Description Single cell with PCM

Battery Capacity 2600mAh

Customer Approval	Company Name	
	Material number	
	Signature	
	Date	
	Company Stamp	

Specification of Lithium-ion Cylindrical Rechargeable Battery

AMENDMENT RECORDS

Revision	Description	Prepared by	Checked by	Approval	Date

Contents

1、 Scope/	-----	4
2、 Product/	-----	4
3、 Specification /	-----	4、 5
4、 Battery outward appearance and Dimension /	-----	6
4、 Battery Basis BOM List /	BOM -----	6
4、 Outward appearance and Dimension /	-----	7
5、 Packing drawing	-----	7
5、 PCM parameters	-----	8
5、 PCM BOM List	-----	8
5、 PCM Schematic diagram	-----	8
5、 Circuit PCM diagram	-----	9
5、 PCM Pad description	-----	9
6、 Visual Inspection/	-----	10
7、 Electrical characteristics/	-----	10
7、 Mechanical characteristics/	-----	11
8、 Standard environmental test condition/	-----	12
9、 Charging/	-----	12
10、 warranty/	-----	12
11、 Liability/	-----	12
12、 Identification/	-----	12
13、 Notice for Designing Battery Pack /	-----	13
14、 Warnings	-----	14
15、 Attention	-----	15
16、 1Reminding	-----	15

PRODUCT SPECIFICATION

1. Scope/

This document describes the product specification and using condition of the Lithium-ion Cylindrical rechargeable cell supplied by

2. Product/

2.1 Name : Lithium-ion polymer rechargeable cell

3. Specification /


NO.	Items	Specifications	Remark
1	Nominal voltage	3.7 V	
2	2.1Nominal capacity	2600 mAh	According to the standard charging after full charge, constant current discharge 0.2Cto 2.75V.
	2.2Minimum Capacity	2550 mAh	
3	Initial Impedance	≤ 150 mΩ	AC Impedance 1KHz
4	Charge Cutoff Voltage	4.2 V	
5	Discharge Cut-off Voltage	2.75 V	
6	Shipment voltage	3.45-4.0 V	
7	Battery weight	≈ 50.0 g	
8	8.1Standard Charge	0.2C CC (constant current) charge to 4.2V, then CV (constant voltage 4.2V) charge till charge current decline to 0.02C	
	8.2Standard Discharge	0.2C CC (constant current) discharge to 2.75V	
	8.3Standard testing condition	Temperature :25±2° C ; Humidity : ≤85%RH Atmospheric Pressure : 86-106kPa	
9	Max discharge current	1C	Recommended temperature 20-45°C
10	Operating Temperature	Charge: 10~45°C	
		Discharge: -20~55°C	
11	Max charge current	10~15°C: 0.2C CCCV to 4.2V	Charge at very low temperature such as blew 10°C, will be get a lower capacity and reduce cycle life of the battery
		15~45°C: 0.5C CCCV to 4.2V	
12	Max Discharge current	(-20°C) ~ (0°C) 0.2C DC to 2.75V	
		(0°C) ~ (55°C) : 1C DC to 2.75V	

PRODUCT SPECIFICATION

NO.	Items	Specifications	Remark
13	Storage temperature	≤1 months: -20°C ~45°C	a) The capacity for storage shall be 50~75% SOC
		≤3 months: -20°C ~35°C	b) The battery should cycle once in June month. Recommended storageTemperature is 25°C of SOC
		≤1 year: -20°C ~25°C	
14	Storage Humidity	≤75% RH	

PRODUCT SPECIFICATION

4.1 Outward appearance and Dimension /

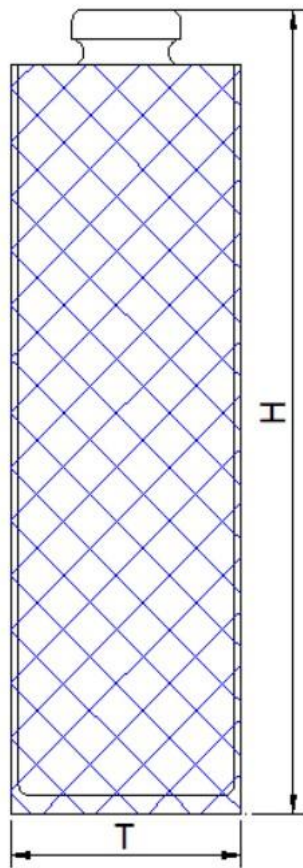

mm


T	Max: 19.0
H	Max: 69.0

4.2 Basis BOM List/

Item	Reference	Material name	Model/Specification	Quantity	Remark
1	Cell	18650	3.7V 2600mAh	1	
2	PCM	ZN-PCM	TY1344-D16D DW01+8205A*2	1	
3	PVC	/	/Bule	1	
4					
5					
6					

PRODUCT SPECIFICATION



4.3 Outward appearance and Dimension /

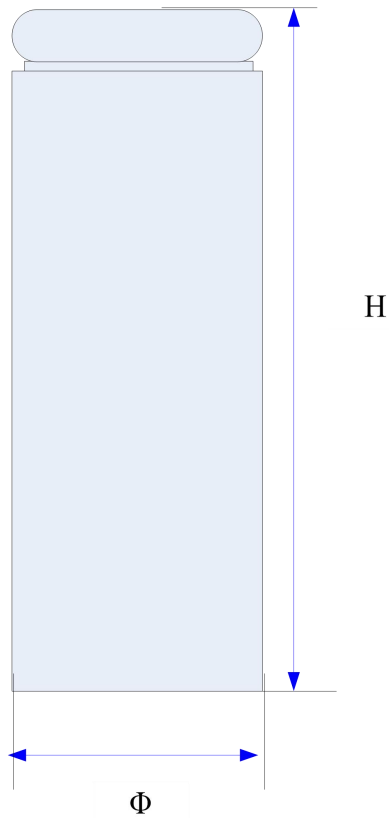

: mm

Φ	Max: 18.5
H	Max: 65.3

5.Packing drawing

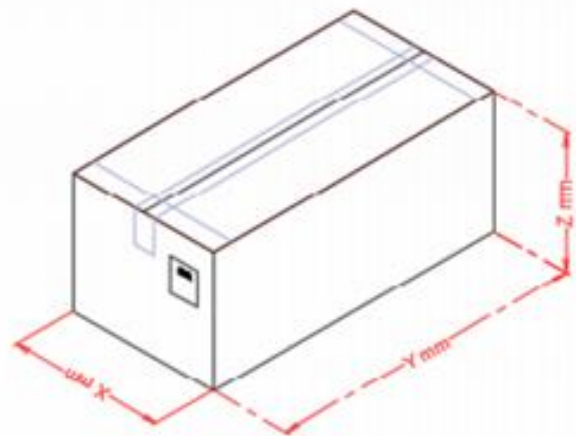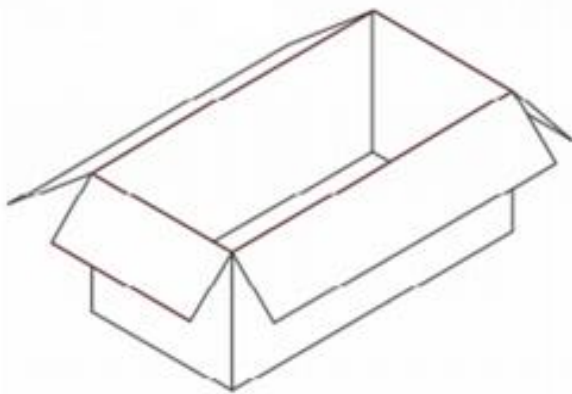

NO	Items	Description
1	Packing style	Carton
2	Carton Sealing method	Transparent adhesive tape

PRODUCT SPECIFICATION

5.1 PCM/


Symbol	Name	MIN	Typical.	Max	Unit
VDET1	Over-Charge detect voltage	4.23	4.30	4.35	V
VDET2	Over-discharge detect voltage	2.30	2.45	2.60	V
IEC	Excess Current threshold	4.0	---	9.0	A
IDD	Supply current	---	3.5	7	μA
RD	Internal resistance in normal operation	---	---	60	mΩ

5.2





BOM

QTY	DESCRIPTION	REF	UNIT	QTY	UNIT
1	IC	DW01, SOT-23-6	PCS	U1	1
2	MOS	8205A, TSSOP-8	PCS	U2/U3	2
3		0603, 100 Ω, ±5%, 1/16W	PCS	R1	1
4		0603, 1K Ω, ±5%, 1/16W	PCS	R2	1
5		0603, 0.1μF, -20~+80%/16V	PCS	C1	1
6		2.8*2.8*0.3	PCS	B+, B-	2
7	PCB	TY1344-D16D, 16.0*16.0*0.6mm,	PCS	PCB	1



5.3 Schematic diagram

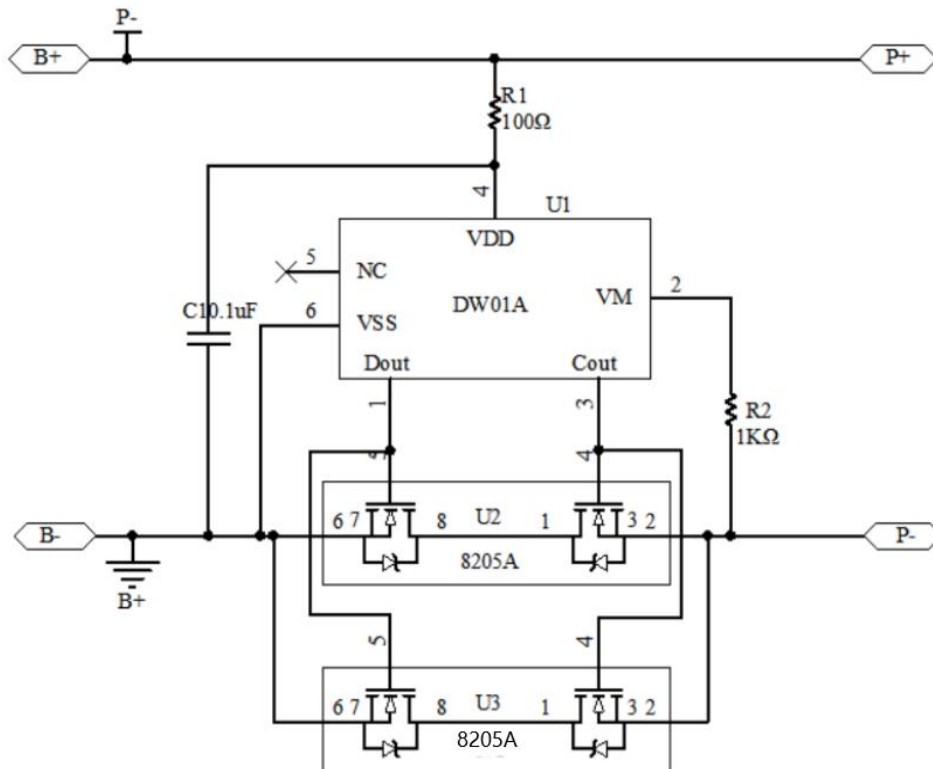

5.4. Circuit PCB diagram

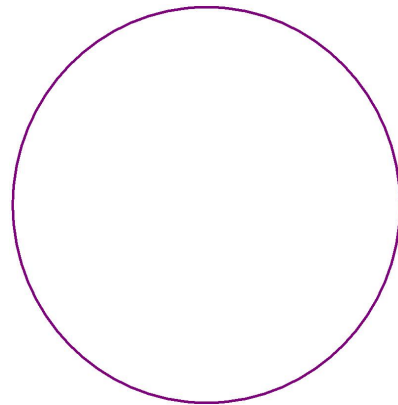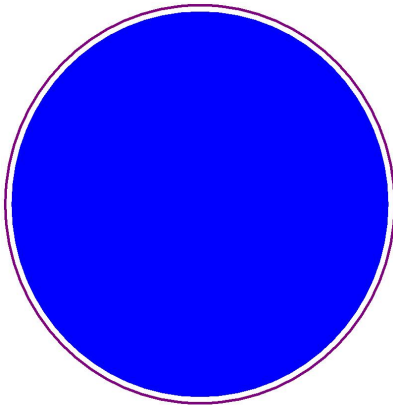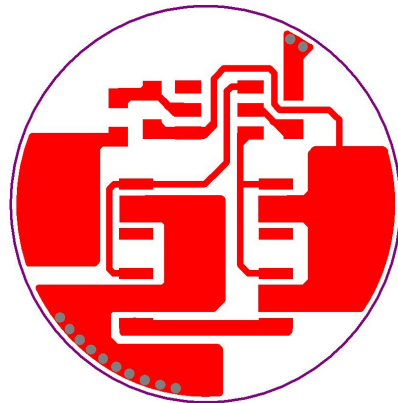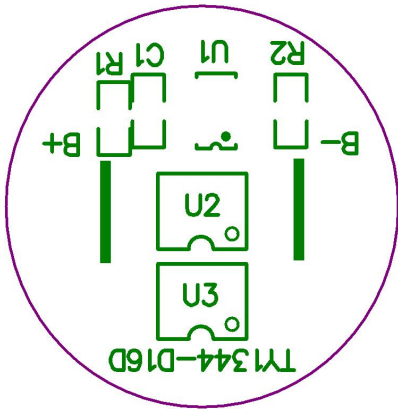

5.5. Pad description

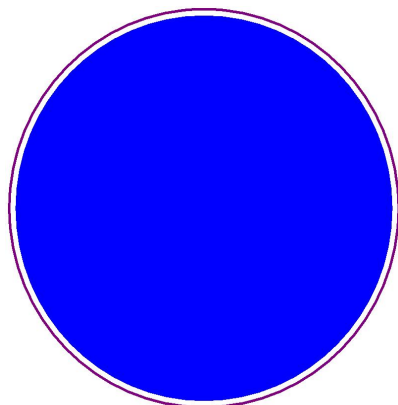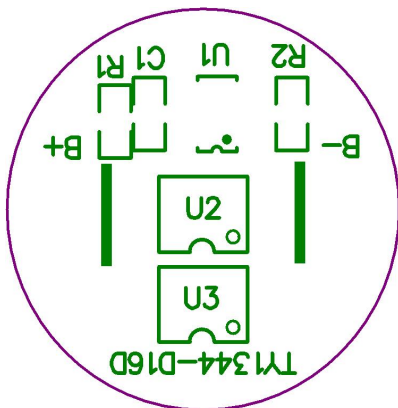

PRODUCT SPECIFICATION

6. Visual Inspection/

There shall be no such defect as scratch,flaw,crack,and leakage,which may adversely affect commercial value of the cell.

7. Cell Specification/

7.1 Electrical characteristics

Items	Test Method and Condition				Criteria
7.1.1 Initial capacity	The capacity means the discharge capacity of the cell that was discharged to 2.75V with discharge current of 0.2C within one hour after the full charge.				\geq 2550 mAh
7.1.2 Cycle life	Cycle life is the capacity of the cell that was repeated 300 cycles with full charge and then discharging to 2.75V with discharge current of 0.2C .				\geq 80% Initial capacity
7.1.3 Initial impedance	Cell resistance was measured at AC 1KHz after 50% charge and the test temperature was 25°C .				\leq 150 mΩ
7.1.4 Temperature Capacity Test	The discharge capacity of contrast, under the conditions of different temperature in 25 °C under the condition of normal temperature after full charge of the battery, as shown in the table below normal temperature and high temperature to the capacity of 0.2 C to 2.75V, low temperature is 0.2C to 2.5 V discharge capacity.the time between charging and discharging must beyond 3 hours.				
	Charge temperature		Discharge temperature		
	25°C	-10°C	0°C	25°C	60°C
		$\geq 70\%$	$\geq 80\%$	100%	$\geq 85\%$
7.1.5 Self-discharge	After the full charging, storage the cells in a temperature of 25°C for 28 days, then measure the capacity with discharge current of 0.2C till 2.75V.				Capacity \geq 90% Initial capacity

PRODUCT SPECIFICATION

7.2 Mechanical characteristics

Items	Test Method and Condition	Criteria
7.2.1 Vibration Test	Fixed the fully charged cell to vibration table and subjected to vibration cycling that the frequency is to be varied at the rate of 1Hz per minute between 10Hz and 55Hz, the excursion of the vibration is 0.8mm. The cell shall be vibrated for 90 ~100 minutes per axis of XYZ axes.	No explosion No fire, No leakage.
7.2.2 Drop Test	The cell was dropped freely from the height of 1000mm to the concrete floor, and each surface was dropped once	No explosion, No fire

7.3 Safety

Items	Test Method and Condition	Criteria
7.3.1 Crush Test	The pressure on the surface of the fully charged cell do not stop being raised until 17.2 Mpa when the cell is crushed by two flat surfaces.(Max13kN)	No explosion, No fire.
7.3.2 Heating	After full charging at 0.1C, put the battery in the baking oven and start , the temperature of the oven is to be raised at a rate of 5°C per minute to a temperature of 130±2°C, remain for 10minutes at that temperature	No explosion, No fire .
7.3.3 Short-Circuit Test	After full charge, the positive and negative polarities are connected together by a copper wire whose resistance is less than or equal to 80±20mΩ.	
7.3.4 Over-charge Test	The cell is overcharged to 4.6V with a current of 3C and holded for 8 hours.	

8. Standard environmental test condition/

Unless otherwise specified, all tests stated in this Product Specification are conducted at below condition.

Temperature: $25\pm 2^{\circ}\text{C}$

Relative humidity : $65\pm 20\%$

9. Charging/

Charging current and charging voltage should be less than specified in the Product Specification.

The charger shall be designed to comply with Product Specification.

It is dangerous that charging with higher current or voltage than Product Specification may cause damage to the cell electrical, mechanical safety performance.

10. warranty/

Period of warranty: 12 months after sales;

Range of warranty: There is low voltage, expansion or leakage with the correct use of the cell in the period of warranty

11. Liability/

Please use the Lithium-ion Polymer rechargeable cells supplied by Akyga Battery under the product specification. It may cause fire or expansion if the cells are used incorrectly. We will not guarantee the safety unless the cells are used under the product specification.

12. Identification/

Warnings would better be marked on the surface of the battery which is tied up by certain cells:

*Using the charger designated by the manufacturer.

*Don't throw the battery in fire or heat it.

*Don't short-circuit.

*Don't unpack the battery or change its structure.

13. Notice for Designing Battery Pack /

13.1 Battery Pack design

13.1.1 Battery shell should be with enough mechanical strength, to protect the inner cell from mechanical shock;

13.1.2 No cell movement in the battery pack should be allowed;

13.1.3 No Sharp edge or bulge components should be inside the pack containing the battery;

13.2 Avoid some components to contact the edge of packing foil of batteries ;

13.3 Tab connection

13.3.1 Ultrasonic welding or spot welding is recommended to connect battery with PCM or other parts;

13.3.2 The tab is not very firm. Don't bend the tab. especially the positive pole. It will rupture easily;

13.3.3 If apply manual solder method to connect tab with PCM, below notice is very important to ensure battery performance:

- 1). The solder iron should be temperature controlled and ESD safe;
- 2). The soldering iron temperature should be 360-420°C;
- 3). Soldering time should not be longer than 3s ;
- 4). Soldering times should not exceed 3 times ,secondary welding should be done after the poles are cooling;
- 5). Directly heat cell body is strictly prohibited;
- 6). Don't let the electric iron contact the surface of the cell.

Please use the battery according to the provisions as below ,Incorrect using of the battery may cause fire or expansion,and destroy its performance.

14.Warnings

- 14.1 Don't throw the cell in fire or heat it or store it in high temperature place ;
- 14.2 Don't operate or use the cell under high temperature or next to the heating material. Don't throw the cell in fire or heat it;
- 14.3. Don't fix the positive and negative of the cell reversely to the electrical equipment ;
- 14.4 Don't connect the positive and negative polarities by metallic conductor such as a metallic wire;
- 14.5 Don't impact or scrape the surface of the cell by spiculate parts;
- 14.6 Don't stab it with a needle,beating,treading,fold or other way;
- 14.7 Don't drop or fling the cell randomly;
- 14.8 Keep the cell sealed!(Don't open or deform folding edge,Don't bend or fold sealing edge,etc);
- 14.9 Don't unpack the battery or change its structure!;
- 14.10 Don't throw the cell in water,please keep it from humidity.

15.Attention

- 15.1 Please use the qualified equipment for charging and recharging the cell;
- 15.2 Don't use different type of cells supplied by different manufacturer together;
- 15.3 Don't charge the heating or modification cell;
- 15.4 Don't let the cell over-discharge.

16.1Reminding

- 16.1 Don't use the damaged cells (the sealing edge was damaged, the pack was damaged, the electrolyte leakage, etc.). If the cell heating when using, go far away from the cell, it may avoid unnecessary damage;
- 16.2 Theoretically, there is not flowing electrolyte in the cell, but if the leakage of electrolyte happen,or the electrolyte splash down to the skin, eyes or other parts of the body, wash with water and go to hospital immediately;
- 16.3 The cells supplied by ZHAONENG Battery Industrial Co., Ltd. had passed the QC before sales,If there is any abnormal problem such as unidentified heating,expansion and peculiar smell,please contact with us;
- 16.4 The Pack stored beyond half year should be charged to 3.7~3.9V/cell with constant current at 0.5C .