



SPECIFICATIONS FOR APPROVAL

ITEM

CL21X Metallized Polyester Film Capacitor

PART NO.

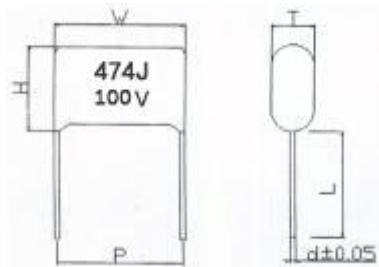
474J100V P5 **ME474J100DP5-001**






ISSUED DATE

2023/03/23

1 outer size(mm) Table 1

| PN | CAP (uF) | R. V (VDC) | DF (1KHZ) ≤% | TOL ±% | Size | | | | | |
|------------------|-------------|---------------|--------------------|-----------|-------------|-------------|-------------|-------------|-----------|-------------|
| | | | | | W (±0.8) | H (±0.8) | T (±0.8) | P (±0.5) | L (±2) | φd± 0.05 |
| ME474J100DP5-001 | 0.47 | 100V | 0.8 | 5 | 6.5 | 8.0 | 4.5 | 5 | 22 | 0.5 |
| Remark | | | | | | | | | | |


474J
100V

| (Code) | I | II | III | IV | V | X |
|----------------------|---|---|---|--|---|---|
| (Forming shapes) |  |  |  |  |  |  |
| (Applicable range) | $P \geq F$ $0\text{mm} \leq P-F \leq 3\text{mm}$ $\leq 3\text{mm}$ | $P \leq F$ $3\text{mm} \leq F-P \leq 8\text{mm}$ $\leq 8\text{mm}$ | | P $0\text{mm} \leq F-P \leq 3\text{mm}$ $\leq 3\text{mm}$ | P | $P=F$ |
| (Dimension standard) | A ≤ 5.0mm; B allow deviation ± 0.5mm; F allow deviation ± 1.0mm; | | | | | |



1、Range

This regulation applies to CL21X metallized polyester film capacitors.

2、Features

- 2.1) Non-inductive winding structure for metallized polyester film.
- 2.2) Flame retardant epoxy powder encapsulation, good insulation performance.
- 2.3) Small size and light weight.
- 2.4) With self-healing function, wide capacity range and high reliability.

3、General technical data

- 3.1) Reference Standard: GB/T 7332 (IEC60384-2)
- 3.2) Climate Type: 55/110/56
- 3.3) Rated Voltage: 50/63/100V、250V、400V、630V (When the temperature exceeds 85°C but is lower than 110°C, the rated voltage decreases by 1.25%UR/°C)
- 3.4) Capacity range: 0.001μF---10μF
- 3.5) Capacitance Tolerance: J(±5%)、K (±10%) 、M (±20%)
- 3.6) Proof Voltage: 1.6U_R (5S)
- 3.7) Insulation Resistance: U>100V C \leq 0.33uF \geq 15000MΩ(20°C、100V、1min)
C>0.33uF \geq 7500S(20°C、100V、1min)
U \leq 100V C \leq 0.33uF \geq 3000MΩ(20°C、10V、1min)
C>0.33uF \geq 1000S(20°C、10V、1min)
- 3.8) Loss Tangent: DF \leq 0.8 %(20°C、1KH_Z)； \leq 1.5%(20°C、10KH_Z)

4、Materials

4.1) Medium: polyethylene terephthalate film (polyester film)

4.2) Electrode: Aluminized

4.3) Lead wire: Tinned copper clad steel wire

4.4) Encapsulation: Powder epoxy encapsulation

5、Mark

5.1) The voltage and nominal capacitance and capacitance tolerance to be print on the capacitor.

5.2) Capacitance Representation Method:

| | | | | | |
|----|--------|-------|-------|--------|---------|
| PF | 100 | 1000 | 10000 | 100000 | 1000000 |
| NF | 0.1 | 1.0 | 10.0 | 100.0 | 1000.0 |
| μF | 0.0001 | 0.001 | 0.01 | 0.1 | 1.0 |
| 代码 | 101 | 102 | 103 | 104 | 105 |

6、Purpose:

Widely used in communication equipment, tape recorders, TV sets, VCDs and DC or pulsating electrical appliances of various electronic equipment.

7. Characteristic

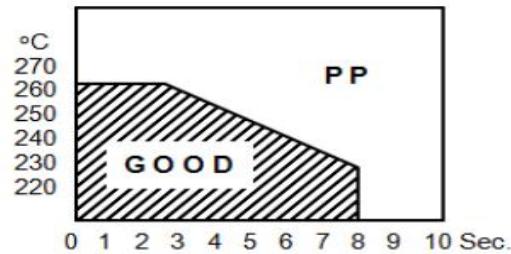
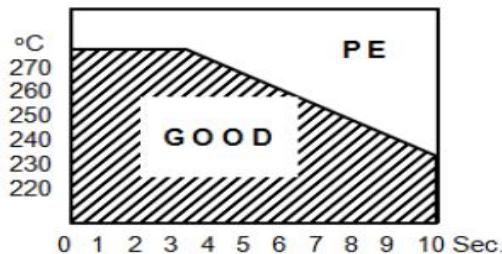
| No. | Item | Test Condition | Requirement | | | | | | | |
|-------------------------|-----------------------------|---|--|---------|--------------------|--------|--------------------|-------|---|--|
| 1 | Capacitance Tolerance | Frequency: 1KHZ $\pm 0.1\text{KHZ}$ Measuring voltage: $\leq 1\text{Vrms}$ | $\pm 5\% \text{ (J)} \pm 10\% \text{ (K)}$ | | | | | | | |
| 2 | Loss Tangent | Frequency: 1KHZ $\pm 0.1\text{KHZ}$ Measuring voltage: $\leq 1\text{Vrms}$ | $\leq 0.8\%$ | | | | | | | |
| 3 | Insulation Resistance | <p>Test Voltage: $U_R > 100\text{VDC}$ was test with 100VDC, $U_R \leq 100\text{VDC}$ was test with 10VDC</p> <p>Temperature: $20^\circ\text{C} \pm 15^\circ\text{C}$ duration: 60 $\pm 5\text{sec}$</p> | $U > 100\text{V}$ $C \leq 0.33\mu\text{F} \geq 15000\text{M}\Omega(20^\circ\text{C}, 100\text{V}, 1\text{min})$ $C > 0.33\mu\text{F} \geq 7500\text{S}(20^\circ\text{C}, 100\text{V}, 1\text{min})$ $U \leq 100\text{V}$ $C \leq 0.33\mu\text{F} \geq 3000\text{M}\Omega(20^\circ\text{C}, 10\text{V}, 1\text{min})$ $C > 0.33\mu\text{F} \geq 1000\text{S}(20^\circ\text{C}, 10\text{V}, 1\text{min})$ | | | | | | | |
| 4 | Proof Voltage | <p>Between Leads: Test Voltage : $1.6U_R$, duration : 5sec ($P=5\text{mm}$)</p> <p>Wire Leads and Case: Test Voltage: $2U_R$, duration: 5sec When the temperature exceeds 85°C but is lower than 110°C, the rated voltage decreases by $1.25\%UR/\text{ }^\circ\text{C}$</p> | No breakdown or arcing | | | | | | | |
| 5 | rapid change of temperature | <p>Temperature: $\theta_A = -55^\circ\text{C}$, $\theta_B = +110^\circ\text{C}$ Exposure time at high and low temperature: 30min Conversion time: 2 ~ 3min cycle index: 5 次</p> | No visible damage of appearance $\Delta c/c \leq \pm 5\%$ $\text{tg}\delta \leq 0.8\%$ | | | | | | | |
| 6 | Wire lead tensile strength | <p>Tension :</p> <table border="1"> <tr> <td>Wire Lead diameter (mm)</td> <td>Tension</td> </tr> <tr> <td>$0.3 < d \leq 0.5$</td> <td>0.51kg</td> </tr> <tr> <td>$0.5 < d \leq 0.8$</td> <td>1.0kg</td> </tr> </table> | Wire Lead diameter (mm) | Tension | $0.3 < d \leq 0.5$ | 0.51kg | $0.5 < d \leq 0.8$ | 1.0kg | No mechanical damage, such as lead breakage and looseness | |
| Wire Lead diameter (mm) | Tension | | | | | | | | | |
| $0.3 < d \leq 0.5$ | 0.51kg | | | | | | | | | |
| $0.5 < d \leq 0.8$ | 1.0kg | | | | | | | | | |
| 7 | Wire lead bending strength | <p>(half of the terminal) , Load:</p> <table border="1"> <tr> <td>Wire Lead diameter (mm)</td> <td>Load</td> </tr> <tr> <td>$0.3 < d \leq 0.5$</td> <td>0.51Kg</td> </tr> <tr> <td>$0.5 < d \leq 0.8$</td> <td>1.0Kg</td> </tr> </table> <p>In both positive and negative directions, it should be bent twice in each direction continuously, and the bending angle = 90°</p> | Wire Lead diameter (mm) | Load | $0.3 < d \leq 0.5$ | 0.51Kg | $0.5 < d \leq 0.8$ | 1.0Kg | No mechanical damage, such as lead breakage and looseness | |
| Wire Lead diameter (mm) | Load | | | | | | | | | |
| $0.3 < d \leq 0.5$ | 0.51Kg | | | | | | | | | |
| $0.5 < d \leq 0.8$ | 1.0Kg | | | | | | | | | |

| 8 | Weldability | Ta Method 1 Solder Temperature: 260°C±5°C Solder Time : 2.0±0.5sec Solder : Environmental protection material (lead-free) | More than 95% of the area has tin | |
|-----|--------------------------|--|--|---|
| 9 | Durability | | | |
| NO. | Project | Performance | Test Condition | |
| 9.1 | temperature cycle | Appearance | no significant change | Test temperature cycle: 5 cycles in total. Each cycle includes: 1.+20 +/- 2°C, 3 min 2. -55 +0/-3 °C , 30 min 3. +20 +/- 2°C, 3 min 4. +110 +3/-0 °C, 30 min 5. +20 +/- 2°C, 3 min |
| | | Proof Voltage | matching No. 4 | |
| | | Capacitance change rate ($\Delta C/C$) | $\leq +/- 5\%$ | |
| | | Loss | $\Delta DF < 0.20\% .(1KHz)$ | |
| | | Appearance | no significant change | |
| 9.2 | high temperature loading | Appearance | No significant change, and the sign should be clearly identifiable | The test base on IEC 60384-2. Refer to JIS C 5102-1994. Test temperature : +110 +/- 2 °C. 110% voltage application: 1000 +24/-0 hour; After the test, allow to stand at standard temperature and humidity for 1.5 +/- 0.5 hours before measuring. |
| | | Proof Voltage | matching No. 4 | |
| | | Capacitance change rate ($\Delta C/C$) | $\leq +/- 8\%$ | |
| | | Loss | $\Delta DF < 0.20\% .(1KHz)$ | |
| | | Insulation Resistance (I.R.) | $\geq 50\%$ of initial value | |
| 9.3 | Wet and heat loading | Appearance | No significant change, and the sign should be clearly identifiable | Refer to JIS C 0022. Test temperature :+40 +/- 2°C Test humidity : 90% to 95% R.H. Test voltage : Rated voltage Test duration : 500 +24/-0 hours |
| | | Proof Voltage | matching No. 4 | |

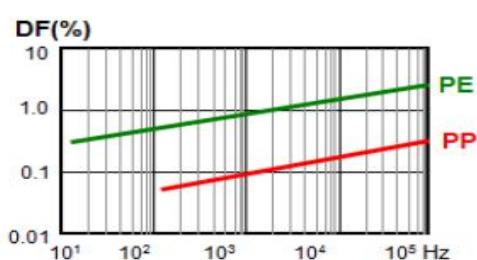
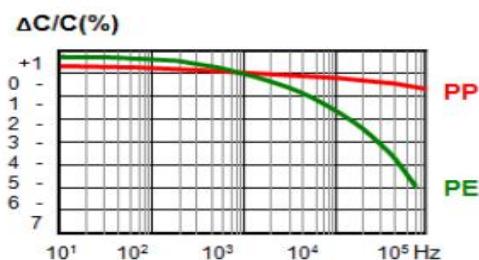
| | | | | | |
|-----|--|--|--|---|--|
| | | Capacitance change rate ($\Delta C/C$) | $\leq +/- 10\%$ | After the test, allow to stand at standard temperature and humidity for 1.5 +/- 0.5 hours before measuring. | |
| | | Loss | $\Delta DF < 0.20\% .(1KHz)$ | | |
| | | Insulation Resistance (I.R.) | $\geq 50\%$ of initial value | | |
| 9.4 | Soldering temperature bearing capacity | Appearance | No significant change, and the sign should be clearly identifiable | The test base on IEC 68-2-20 Tb. Welding temperature : 260 +/- 5°C. | |
| | | Proof voltage between terminals | matching No. 4 | Dip duration : 5 +/- 0.5 sec. .(P=5mm) 10 +/- 0.5 sec. .(P=7.5mm) Dip thickness: 4 +/- 0.8 mm from the root | |
| | | Capacitance change rate ($\Delta C/C$) | $\leq +/- 3\%$ | After the test, allow to stand at standard temperature and humidity for 1.5 +/- 0.5 hours before measuring. | |
| | | Connector | It should be stable | | |
| 9.5 | Dry heat resistance | Appearance | No significant change, and the sign should be clearly identifiable | Test temperature : +110 +/- 2°C Test duration : 16 +1/-0 hours | |
| | | Proof voltage | matching No. 4 | | |
| | | Capacitance change rate ($\Delta C/C$) | $\leq +/- 5\%$ | | |
| 9.6 | Cold resistance | Appearance | No significant change, and the sign should be clearly identifiable | Test temperature : -55 +/- 2 °C Test duration : 2 +/-1 hours | |
| | | Proof voltage | matching No. 4 | | |
| | | Capacitance change rate ($\Delta C/C$) | $\leq +/- 5\%$ | | |
| 9.7 | Vibration resistance | Connection strength | Neither cause an open circuit, nor cause a short circuit. The connection should be stable. | The test base on IEC 68-2-6 Fc. Frequency change : 10--500 Hz. The vibration distance : 0.75 mm. The test direction : X, Y, Z. The test duration : 2 hours +1/-0 each direction | |
| | | Appearance | No mechanical damage | | |

| | | | | | |
|------|------------------------------------|--|-------------------------------|--|--|
| 9.8 | severe temperature changes | Appearance | No significant change | The test base on IEC 68-2-14 Na. Test temperature . High temperature : +110 +/-5 °C Low temperature : -55 +/-5°C Each temperature 30 minutes +/- 10% | |
| | | Proof voltage | matching No. 4 | | |
| | | Appearance | No mechanical damage | | |
| 9.9 | Short circuit charge and discharge | Capacitance change rate ($\Delta C/C$) | $\leq +/- 3\% \text{ (1KHZ)}$ | The voltage of Short circuit charge and discharge : U_R | |
| | | Loss change rate (ΔDF) | < 3% (10KHz) | The times of short circuit charging and discharging : 3 times | |
| | | Insulation Resistance (I.R.) | matching No. 3 | Sampling quantity: 10 pcs /batch | |
| 9.10 | Normal temperature storage | Capacitance change rate ($\Delta C/C$) | $\leq +/- 2\% \text{ (1KHZ)}$ | Temperature: $\leq 35^\circ\text{C}$ Humidity : $\leq 80\%$ Storage time : 30-35 days | |
| | | Loss change rate (ΔDF) | matching No.2 | | |
| | | Insulation Resistance (I.R.) | matching No. 3 | | |

Soldering Temperature VS Time



Frequency Characteristics



Temperature Characteristics

