

3 Phase Bridge Rectifiers

Primary characteristics		
Parameter	Value	Unit
Maximum repetitive peak reverse voltage	800~1600	V
Maximum average forward output rectified current	35	A

Features

- Ideal for printed circuit boards,
- High surge current capability,
- High case dielectric strength,
- Glass passivated chip junction


Mechanical Data

- **Case:** 3GBJ (plastic package),
- RoHS compliant,
- Halogen free,
- **Molding Compound Flammability Rating:** UL 94 V-0,
- **Terminals:** High temperature soldering guaranteed: 260 °C/10 sec. at terminals,
- **Mounting torque:** 8.0kgf.cm max.

Applications

- Household electric appliances,
- Industrial power supply,
- Industrial automation equipment,
- Electric welding machine

Case dimensions [mm]

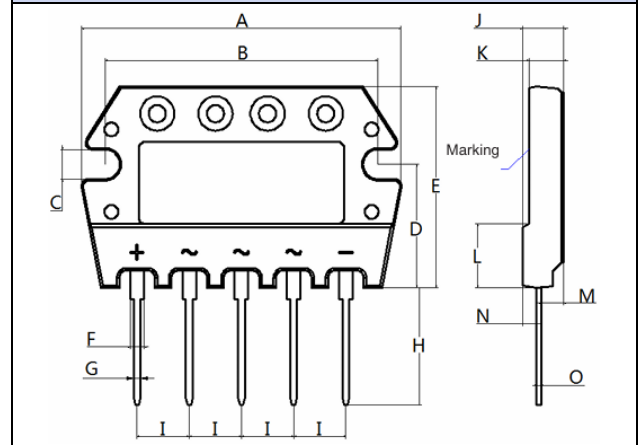

3GBJ

Dim.	[mm]		[inch]	
	Min.	Max.	Min.	Max.
A	46.10	47.10	1.815	1.854
B	39.30	40.30	1.547	1.587
C	4.00	4.60	0.157	0.181
D	17.70	18.30	0.697	0.720
E	28.80	29.80	1.134	1.173
F	1.80	2.20	0.071	0.087
G	0.80	1.20	0.031	0.047
H	16.50	17.50	0.650	0.689
I	7.32	7.92	0.288	0.312
J	5.50	6.50	0.217	0.256
K	4.50	5.50	0.177	0.217
L	8.80	9.80	0.346	0.386
M	3.00	3.60	0.118	0.142
N	1.85	2.25	0.073	0.089
O	0.55	0.75	0.022	0.030


Absolute maximum ratings and electrical characteristics (T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value			Unit
		3GBJ3508	3GBJ3510	3GBJ3516	
Maximum repetitive peak reverse voltage	V _{RRM}	800	1000	1600	V
Maximum RMS voltage	V _{RMS}	560	700	1120	
Maximum DC blocking voltage	V _{DC}	800	1000	1600	
Maximum average forward output rectified current @T _C =85°C	I _{F(AV)}	35			A
Peak forward surge current 8.3mS single half sine wave, superimposed on rated load	I _{FSM}	450			
Peak forward voltage @I _F =17.5A	V _F	1.1			V


Rating for fusing ($t < 8.3\text{ms}$), per diode	$I^2 t$	840	$\text{A}^2 \text{s}$
Typical thermal resistance (junction to ambient), without heatsink	$R_{\theta JA}$	14	$^{\circ}\text{C}/\text{W}$
Typical thermal resistance (junction to case), with heatsink	$R_{\theta JC}$	0.75	
Dielectric strength, terminals to case AC 1 minute	V_{dis}	2	KV
Peak reverse current per diode @ $V_R = V_{RRM}$	$T_A = 25^{\circ}\text{C}$	5	μA
	$T_A = 125^{\circ}\text{C}$	500	
Operating junction temperature range	T_J	-55~+150	$^{\circ}\text{C}$
Storage temperature range	T_{STG}	-55~+150	

Typical characteristics ($T_A = 25^{\circ}\text{C}$ unless otherwise specified)


Derating curve for output rectified current

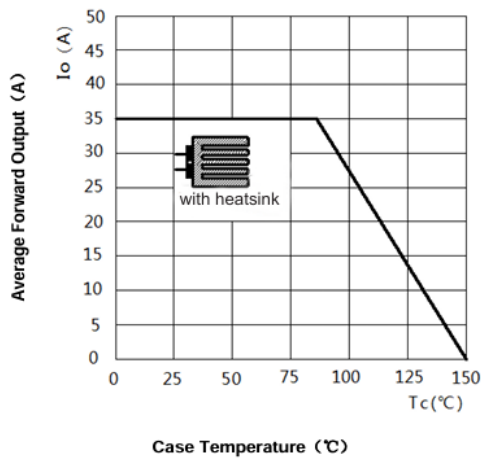


Maximum non-repetitive peak surge current per bridge element

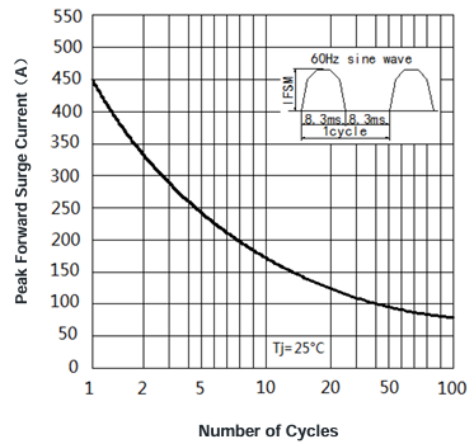

Typical reverse characteristics per bridge element

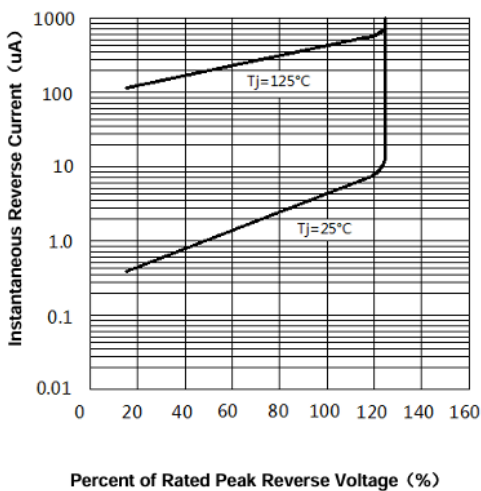

Typical forward characteristics per bridge element

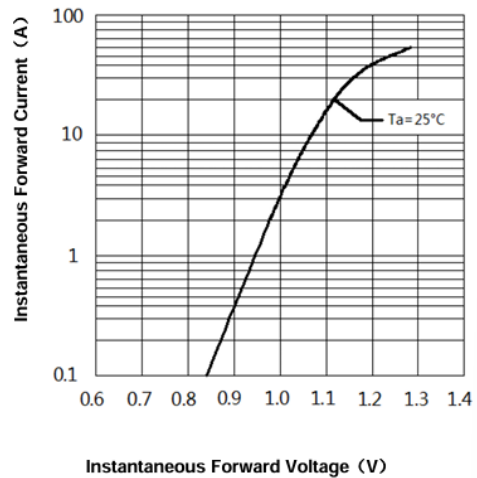

Ordering information		
Part Number	Package	Shipping Quantity
3GBJ35XX	3GBJ	120pcs/box

Disclaimer

Akyga semi reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Akyga semi or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on Akyga semi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Akyga semi does not assume any liability arising out of the application or use of any product or circuit. Akyga semi products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Akyga semi. Customers using or selling Akyga semi components for use in such applications do so at their own risk and shall agree to fully indemnify Akyga semi and its subsidiaries harmless against all claims, damages and expenditures.