

Version:	В		
DATE:	2013-9-23		
DOC.No: AKY6530158-2P-7400mAh			

ADD: Ropla Elektronik Sp. z o. o. ul. Wyścigowa 53-011 Wrocław

Specification Approval Sheet

MODEL: AKY6530158

(7400mAh 3.7V)

Prepared By/Date	Checked By/Date	Checked By/Date	Approved By/Date
Paul/9-23			

	Signature	Date
Customer Approval	Company Name	
	Company Stamp	

	Version:	В
Ropla Elektronik Sp. z o.o.	DATE:	2013-9-23
	DOC.No: AKY6530158-	-2P-7400mAh

Amendment Records

Revision	Description	Prepared by	Approved by	Date
В	First Publish	Paul		2013-9-23

akyga®

	Version:	В	
	DATE:	2013-9-23	
	DOC.No: AKY6530158-2P-7400mAh		
Page 4			
	Page 4		

		AKY6530158-2P-7400mAh
	Content	
1. Scope		Page 4
2. Model		Page 4
3.Cell Specification		Page 4/5
4. Battery/Cell performance test Criteria		Page 6
4.1 Appearance inspection by visual		Page 6
4.2 Environmental test condition		Page 6
4.3 Electrical characteristics		Page 6
4.4 Mechanical characteristics		Page 7
4.5 Safety performance		Page 8
5. Cell initial Dimensions		Page 9
6. Battery specification		Page 10
7. PCM specification		Page 11
8. Application Circuit		Page 12
9. PCM BOM LIST		Page 13
10. Battery Pack Dimensions		Page 14
11. Handling of Cells		Page 15
11.1 Consideration of strength of film	package	Page 15
11.2 Prohibition short circuit		Page 15
11.3 Mechanical shock		Page 15
11.4 Handling of tabs		Page 15
12. Notice for Designing Battery Pack		Page 15
12.1 Pack toughness		Page 15
12.2 Cell fixing		Page 15
12.3 Inside design		Page 15
12.4 Tab connection		Page 15/16
12.5 For mishaps		Page 16
13. Notice for Assembling Battery Pack		Page 16
14. Others		Page 16
14.1 Cell connection		Page 16
14.2 Prevention of short circuit within	a battery pack	Page 16
14.3 Prohibition of disassembly		Page 16/17
14.4 Prohibition of dumping of cells in	to fire	Page 17
14.5 Prohibition of cells immersion into	o liquid such as water	Page 17
14.6 Battery cells replacement		Page 17
14.7 Prohibition of use of damaged ce	lls	Page 17
15. Storage of the Batteries		Page 17
16. Other The Chemical Reaction		Page 17
17. Note		Page 17

		Version:	В
akvga®	Ropla Elektronik Sp. z o.o.	DATE:	2013-9-23
		DOC.No: AKY6530158-	-2P-7400mAh

1 Scope This specification is applies to describe the related Battery product in this Specification and the Battery/cell supplied by Ropla Elektronik Sp. z o.o. only.

2 Model: AKY6530158

3 Cell Specification

No.	Items	Specifications		Remark
1	Nominal Capacity	7400mAh		0.20 Standard discharge
2	Minimum Capacity	7250)mAh	0.2C Standard discharge
3	Nominal Voltage	3.	7V	Mean Operation Voltage
4	Delivery voltage	≥3	.8V	Within 10 days from Factory
5	Charge Voltage	4.2V±	0.03V	By standard charge method
6	Standard charging method	0.5C constant current,4.2V constant voltage charge to 4.2V,continue charging till current delaine to ≤0.01C		Time 2.0h(Ref)
		0.5C 3700mA		Standard charge, charge time:2.0h(Ref)
7	Charge current	1.0C 7400mA		Rapid Charge, charge time:1.0h(Ref)
8	Standard discharging method	0.2C constant current discharge to 3.0V,		/
9	Cell Internal Impedance	≪60mΩ		Internal resistance measured at AC 1KH _Z after 50% charge
10	Weight	≪120g		1



Version:

В

2013-9-23

DOC.No:

DATE:

3 Cell	Specification (continuous)			
No.	ltems	Specifications		Remark
11	Maximum charge current	1C	7400mA	For continuous charging mod
12	Maximum discharge current	1C	7400mA	For continuous discharge mod
13	Operation Temperature and relative	Charge	0~45℃ 60±25%R.H.	Charge at a very low temperature such as
13	humidity Range	Discharge	-20~60℃ 60±25%R.H.	blew 0°C,will be get a lower capacity and reduce cycle life of the battery
14	Storage temperature for a long time	-20~25℃ 60±25%R.H.		Do not storage exceed half year. Must charge once when storage for half year. Must charge the battery which with protect circuit when storage for three mouthed.

akyga®

Version:	В
DATE:	2013-9-23
DOC.No:	
AKY6530158-	-2P-7400mAh

4 Battery/Cell performance test Criteria

4.1 Appearance inspection by visual

There shall be no such defect as flaw, crack, rust, leakage, which may adversely affect commercial value of battery.

4.2 Environmental test condition

Unless otherwise specified, all test stated in this product specification are conduct at below test condition Temperature: $20^{\circ}C$ ~ $25^{\circ}C$

Relative Humidity:60% $\pm 25\%$ R.H.

4.3 Cell Electrical characteristics

No.	Item	Testing Method	Requirements
1	Fully Charged State	CCCV or Constant current charge to 4.2V @1C follow by a constant voltage holding at 4.2V until current drops below 20±5mA.	
2	Rated Capacity	CCCV at 4.2V (per 6.1.1) at room temp. ($20\pm5^{\circ}C$), rest for 1-2 hrs then discharge at a constant current of 0.2C to 3.0V, testing will be terminated by either 5 cycles or any one discharge time exceeds 5 hrs	≥7400mAh
3	Cycle Life @25℃	Measure the capacity after 500 cycles with standard charge/discharge method at 0.25C to 3.0V cut-off voltage.	≥80%
4	Internal Impedance	Internal impedance is measured on a 50% charged battery at 1KHz AC at ambient temperature (20 \pm 2) °C .	≪60mΩ
5	Capacity Retention	Fully charge cells per 6.1.1, store them at $(20\pm2)^{\circ}$ for 28 days, then discharge the cells to 3.0V at 0.2C.	Discharge capacity ≷6300mAh
6	High Temperature Characteristics	Fully charge cells per 6.1.1, store them at $(55\pm2)^{\circ}$ for 2 hours, then discharge the cells to 3.0V at 0.2C.	Discharge capacity ≷6300mAh
7	Low Temperature Characteristics	Fully charge cells per 6.1.1, store them at $(-10\pm2)^{\circ}$ C for 16~24 hours, then discharge the cells to 3.0V at 0.2C.	Discharge capacity ≥4500mAh
8	Cell Voltage during Transportation	Check open circuit voltage (OCV) of cells prior to the delivery to customers.	≥3.75V



V	0	'si	0	n		
v	СІ	- 31	U		-	

DATE:

В

2013-9-23

DOC.No:

No	Items	Test Method and Condition	Criteria
1	Free fall test	The battery to be fully charged in accordance with standard charge condition, then drop the battery three times from a height of 1,0 m onto a concrete floor. The batteries are dropped so as to obtain impacts in random orientations.	No Fire,
2	Vibration test	After standard charging, fixed the cell to vibration table and subjected to vibration cycling that the frequency is to be varied at the rate of 1Hz per minute between 10Hz and 55Hz, the excursion of the vibration is 1.6mm. The cell shall be vibrated for 30 minutes per axis of XYZ axes.	No explosion, No leakage, No fire
3	Crush test	Fully charged the battery in accordance with standard charge condition, the battery is to be crushed between two flat plates. Continuous to applied force on battery of 13kN(17.2Mpa),stopped until a pressure reading of 17.2Mpa is reached on the hydraulic ram	No explosion, No fire
4	Shock test	The fully charged battery is secured to the testing machine by means of a rigid mount which will support all mounting surfaces of the cell or battery. The battery is subjected to a total of three shocks of equal magnitude. The shocks are applied in each of three mutually perpendicular directions. At least one of them shall be perpendicular to a flat face. For each shock the cell or battery is accelerated in such a manner that during the initial 3 milliseconds the minimum average acceleration is 75 gn. The peak acceleration shall be between 125 gn and 175 gn. Cells or batteries are tested in an ambient temperature of 20~25°C	No explosion, No leakage, No fire



Version:

DATE:

B

2013-9-23

DOC.No:

No	Items	Test Method and Condition	Criteria
1	Thermal exposure test	Each fully charged cell, stabilized at room temperature, is placed in a circulating air-convection oven. The oven temperature is raised at a rate of 5 °C/min \pm 2 °C/min to a temperature of 130 °C \pm 2 °C. The cell remains at this temperature for 10 min before the test is discontinued.	No explosion, No fire
2	Low pressure	Each fully charged cell is placed in a vacuum chamber, in an ambient temperature of 20~25°C. Once the chamber has been sealed, its internal pressure is gradually reduced to a pressure equal to or less than 11,6 k Pa (this simulates an altitude of 15240 m) held at that value for 6 h.	No explosion, No leakage, No fire
3.	Short test	The fully charged battery is to be short-circuited by connecting the positive and negative terminals of the battery with resistance load not exceed 100m Ω .Tests are to be conducted at room temperature 20~25°C.	No explosion, No fire The Temperature of the Battery surface not exceeded than 150℃
4	Forced discharge test	A discharged cell is subjected to a reverse charge at 1c for 90 min.	No explosion, No fire
5	Over charge test	After standard charge, continue to charge with a constant voltage 4.6V per a cell, holding 8h.	No explosion, No fire, No leakage
6	Soak Test	Put the batteries into clean water, be soaked for 24 hours.	No break, No fire




Version:	В
DATE:	2013-9-23
DOC.No: AKY6530158-	-2P-7400mAh

AKY6530158-2F ·/400mAh

5 **Cell initial Dimensions**

NO	Items	Units: mm	Remark
1	Thickness	13.5	Max.
2	Width	30.5	Max.
3	Height	158.5	Max.

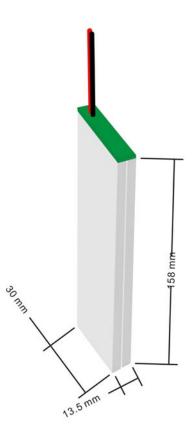



Version:

DATE:

B 2013-9-23

DOC.No:

6 Ba	6 Battery specifications					
No.	Items	Specifications	Remark			
1	Capacity for assembled cell discharging by 0.2C	≥7400mAh	Standard discharging method			
2	Battery Voltage	≥3.8V	Delivery voltage, Within 10 days from Factory			
3	Standard charge condition	Charge with 0.5C constant current and <u>4.2</u> V constant voltage, charge to <u>4.2</u> V,continue charging till current delaine to $\leq 0.01C$	Charge volage: <u>4.2</u> V±0.02V Charge current:0.5C			
4	Standard discharging method	0.2C constant current discharge to <u>3.0</u> V,	/			
5	Internal Impedance	Assemblage Impedance≤60mΩ	Measure two sides of the drawing line after assembling.			



Version:


DATE:

B

2013-9-23

DOC.No:

7 PCM specification					
Item Symbo		Content	Criterion		
	V _{DET1}	Over charge detection voltage	$4.280 \pm 0.025 V$		
Over charge Protection	tV _{DET1}	Over charge detection delay time	1.2 ± 0.24 S		
Uver charge frotection	V _{REL1}	Over charge release voltage	$4.080 \pm 0.050 V$		
		Maximum charge current	≤1. 0A		
	V _{DET2}	Over discharge detection voltage	2.90 ± 0.073 V		
Over discharge protection	tV _{DET2}	Over discharge detection delay time	144±28.8mS		
	V _{REL2}	Over discharge release voltage	$3.0 \pm 0.05 V$		
	V _{DET3}	Over current detection voltage	3.1 \pm 0.078V		
	I _{DP}	Over current detection current	2. 0∼4. 0A		
Over current protection	tV _{DET3}	Detection delay time	12±4.0mS		
		Release condition	Cut load		
		Maximum continuous discharge current	≤1. 0A		
		Detection condition	Exterior short circuit		
Short protection	T _{SHORT}	Detection delay time	230~500uS		
		Release condition	Cut short circuit		
Interior resistance	R _{SS}	Main loop electrify resistance	$V_{c}=3.7V; R_{ss}\leqslant70m\Omega$		
Current consumption	I _{DD}	Current consume in normal operation	8.0µA Max		

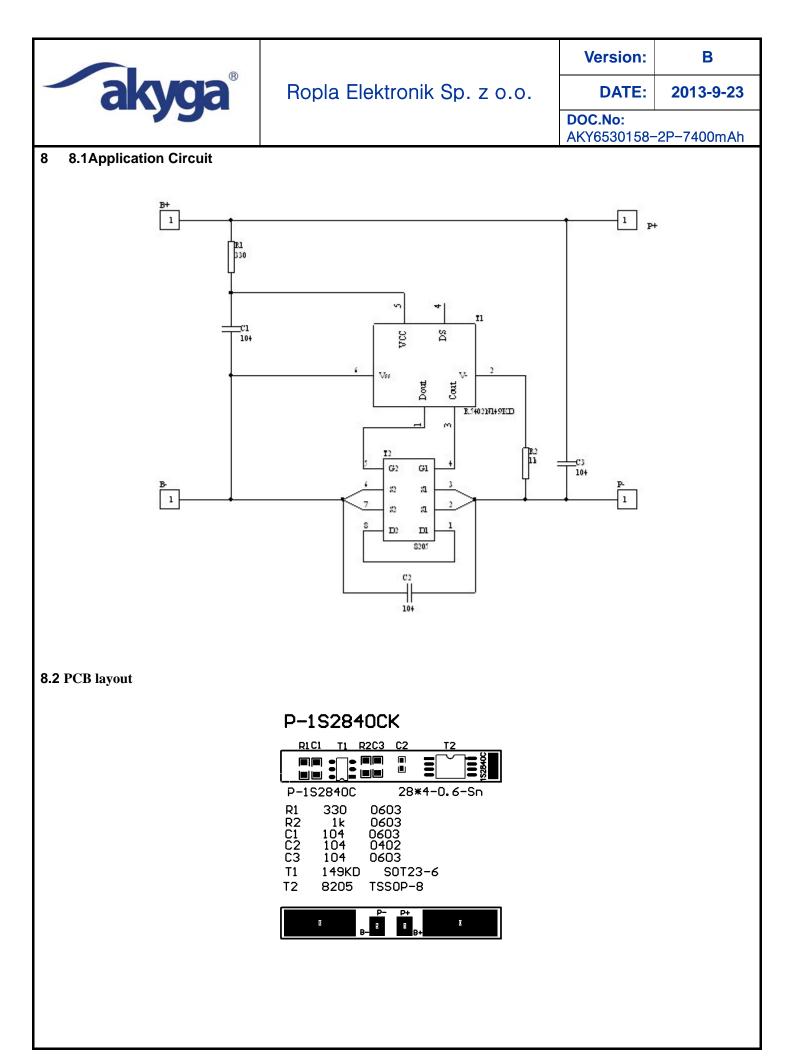



Version:

DATE:

В

2013-9-23

DOC.No:

9 PC	CM BOM LIST					
No.	Description	Vendor	Symbol	Spec./model	Unit	Pcs
1	Circuit board	FSW	РСВ	P-1S2840CK (28*4-0.6-Sn)	pcs	1
2	Resistance	GJ	R1	330/0603	pcs	1
3	Resistance	GJ	R2	1K/0603	pcs	1
4	Resistance	GJ	C1/C3	104/0603	pcs	2
5	Resistance	GJ	C2	104/0402	pcs	1
6	IC	RICHO	T1	R5402N149KD/SOT23-6	pcs	1
7	MOS	FS	T2	8205/TSSOP-8	pcs	1



Ve	rsic	n:	

DATE:

В

2013-9-23

DOC.No:

10 Batt	ery Pack Dimensions	5				
NO	Item	s	U	nits: mm	Remark	
1	Thickn	ess	Т	13.5	Max.	
2	Widt	h	W	30.5	Max.	
3	Heig	nt	Н	158.5	Max.	
4	Cable Le	ength	L			
4	Cable Le	ength	L1			
		BOM	of Battery Pack			
NO	Part name	Quantity	Unit	Remark		
1	Cell	1	ea	AKYGA		
2	Таре	~120~	mm			
3	Solder	0.2	g	Lead Free		
4	Lead	2	pcs	VCC,GND		
5	PCB	1	pcs	P-1S2840CK<149KD+8205>		
6	Wires	2	pcs	UL1007# 26AWG/15cm		
7	Connector	1	pcs			

akyga®

Version:	В			
DATE:	2013-9-23			
DOC.No:				
AKY6530158-2P-7400mAh				

11 Handling of Cells

11.1 Consideration of strength of film package

1) Soft Aluminium foil

Easily damaged by sharp edge parts such as pins and needles, Ni-tabs, so don't strike by those sharp parts.

2) Sealed edge may be damaged by heat above 100°C, bend or fold sealed edge.

11.2 Prohibition short circuit

Never make short circuit cell. It generates very high current which causes heating of the cells and may cause electrolyte leakage, gassing or explosion that is very dangerous.

The LIP tabs may be easily short-circuited by putting them on conductive surface.

Such outer short circuit may lead to heat generation and damage of the cell.

An appropriate circuitry with PCM shall be employed to protect accidental short circuit of the battery pack.

11.3.Mechanical shock

LIP cells have less mechanical endurance than metal-can-cased LIB.

Falling, hitting, bending, etc. may cause degradation of LIP characteristics.

11.4 Handling of tabs

The battery tabs are not so stubborn especially for aluminium tab.

Don't bend tab.

Do not bend tabs unnecessarily.

12 Notice for Designing Battery Pack

12.1 Pack toughness

Battery pack should have sufficient strength and the LIP cell inside should be protected from mechanical shocks.

12.2 Cell fixing

The LIP cell should be fixed to the battery pack by its large surface area.

No cell movement in the battery pack should be allowed.

12.3 Inside design

No sharp edge components should be insides the pack containing the LIP cell.

12.4 Tab connection

Ultrasonic welding or spot welding is recommended for LIP tab connection method.

Battery pack should be designed that shear force are not applied to the LIP tabs.

If apply manual solder method to connect tab with PCM, below notice is very important to ensure battery performance:

- 1) The solder iron should be temperature controlled and ESD safe;
- 2) Soldering temperature should not exceed 350°C;
- 3) Soldering time should not be longer than 3s;



Version:	on: B				
DATE:	2013-9-23				
DOC.No: AKY6530158-2P-7400mAh					

4) Soldering times should not exceed 5 times, Keep battery tab cold down before next time soldering;

5) Directly heat cell body is strictly prohibited, Battery may be damaged by heat above approx. 100°C

12.5 For mishaps

Battery pack should be designed not to generate heat even when leakage occurs due to mishaps.

- 1) Isolate PCM (Protection Circuit Module) from leaked electrolyte as perfectly as possible.
- 2) Avoid narrow spacing between bare circuit patterns with different voltage.

(Including around connector)

LIP battery should not have liquid from electrolyte, but in case If leaked electrolyte touch bare circuit patterns, higher potential terminal material may dissolve and precipitate at the lower potential terminal, and may cause short circuit. The design of the PCM must have this covered.

Notice for Assembling Battery Pack 13

Shocks, high temperature, or contacts of sharp edge components should not be allowed in battery pack assembling process.

14 Others

14.1 Cell connection

- 1) Direct soldering of wire leads or devices to the cell is strictly prohibited.
- 2) Lead tabs with pre-soldered wiring shall be spot welded to the cells.
 - Direct soldering may cause damage of components, such as separator and insulator, by heat generation.
- 14.2 Prevention of short circuit within a battery pack

Enough insulation layers between wiring and the cells shall be used to maintain extra safety protection. The battery pack shall be structured with no short circuit within the battery pack, which may cause generation of smoke or firing.

- 14.3 Prohibition of disassembly
 - 1) Never disassemble the cells

The disassembling may generate internal short circuit in the cell, which may cause gassing, firing, explosion, or other problems.

2) Electrolyte is harmful

LIP battery should not have liquid from electrolyte flowing, but in case the electrolyte come into contact with the skin, or eyes, physicians shall flush the electrolyte immediately with fresh water and medical advice is to be sought.

			Version:	В		
-	Ropla Elektronik Sp. z	0.0.	DATE:	2013-9-23		
			DOC.No: AKY6530158-2P-7400mAh			
	14.4 Prohibition of dumping of cells into fire					
	Never incinerate nor dispose the cells in fire. These may cause explosi prohibited.	on of the cel	ls, which is very	dangerous and is		
	14.5 Prohibition of cells immersion into liquid such as water					
	The cells shall never be soaked with liquids such as water, seawater, drinks such as soft drinks, juices, coffee or others.					
	14.6 Battery cells replacement					
	The battery replacement shall be done only by either cells supplier or device supplier and never be done by the user.					
	14.7 Prohibition of use of damaged cells					
	The cells might be damaged during shipping by shock. If any abnormal fea	itures of the cr	ells are found suc	h as damages in a		
	plastic envelop of the cell, deformation of the cell package, smelling of an	electrolyte, ar	ı electrolyte leaka	ige and others, the		
	cells shall never be used any more.					
	The Cells with a smell of the electrolyte or a leakage shall be placed away from fire to avoid firing or explosion.					
15	15 Storage of the Batteries					
	The batteries should be stored at room temperature, charged to about 30% to 50% of capacity.					
	We recommend that batteries be charged about once per half a year to prevent over discharge.					
16	16 Other The Chemical Reaction					
	Because batteries utilize a chemical reaction, battery performance will deteriorate over time even if stored for a long period					
	of time without being used. In addition, if the various usage conditions such as charge, discharge, ambient temperature, etc. are					
	not maintained within the specified ranges the life expectancy of the battery may be shortened or the device in which the battery					
	is used may be damaged by electrolyte leakage. If the batteries cannot maintain a charge for long periods of time, even when					
	they are charged correctly, this may indicate it is time to change the battery.					
17	Note					
4	Any other items which are not covered in this specification shall be agreed by both parties.					