

Name: Rechargeable Cylindricall Cell (Ni-MH)

Model: AKYGA NM-C-3.5M

SPEC: 1.2V / 3500mAh

Specification Modification Records

Modification Time	Descriptions	Issued Date	Approved By
	Release 1		

Content


Any copies are invalid without our company's approval





(Type): NM-C-3.5M


Specifications of single cell


Nominal voltage			1.2V		
			0.2C	Discharge	
Car	pacity	Minimum	300min		
·		Typical	315min		
				mm	
Dimer	neione	Diameter	26.0 ^{-0.7}		
Dilliel	1510115	Height	49.0-1.0		
,				gram	
We	ight(Approxin	nately)	75.0		
		12mΩ(Max)			
Internal Impedance At 1000 H		At 1000 Hz		After Charge	
		Standard	350mA(0	.1C)×16hrs	
Charge		Rapid		0.5C)×2.4hrs	
	<u>o</u>			$^{\circ}$	
Ambient temperature	larg	Charge	standard	0℃	to 40℃
	Ö	Rapid	0℃	to 40℃	
ten '	Discharge		-20℃ to 50℃		
	Storage		-20℃ to 30℃		

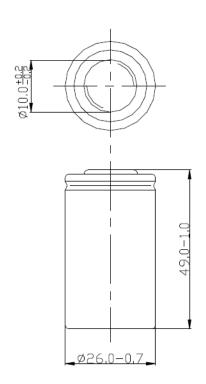

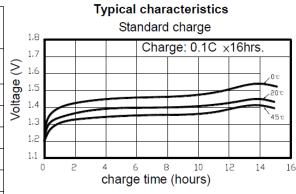

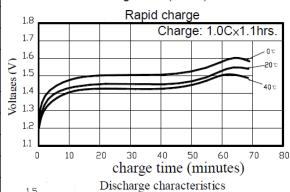

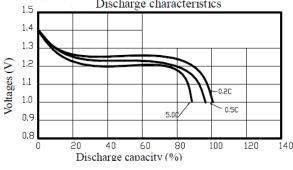

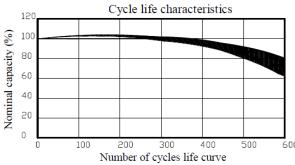



Note:

3.


Nominal capacity, rated at 0.2C 20℃.

2. Average capacity, for reference only.

Weight and internal impedance are For reference.

4. Standard according as IEC of test cycle life.

Charge retention curves of Ni-MH cylindrical cell At 20 $^{\circ}\mathrm{C}$ storage temperature

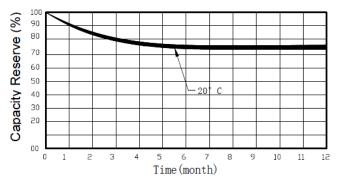

1. PREFACE

The specification is suitable for the performance of Ni-MH rechargeable battery produced by the Akyga battery

2. MODEL

NM-C-3.5M 1.2V

3. APPEARANCE

There shall be no such details as discoloration or electrolyte leakage or 0 voltage.

4. RATINGS

Description	Unit	Specification	Condition	
Nominal Voltage	V	1.2	Unit Cell	
Typical Capacity	min	315	Standard Charge/Discharge	
Nominal Capacity	mAh	3500	Standard Charge/Discharge	
Minimum Capacity	min	300	Standard Charge/Discharge	
	mA	350(0.1C)	Ta=0~40°C	
Standard Charge	hour	16.0h	(see note)	
	mA	800(0.2C)~1750(0.5C) with charge termination control	-△V=5mV/cell Timer cutoff=110%input capacity	
Fast Charge	hour	6.0 approx.(0.2C)~2.4 approx.(0.5C)	Temp. cutoff=40~45°C dT/dt=0.8°C/min(0.5 to 1.0C); 0.8~1°C/min(1C)	



Description	Unit	Specification	Condition	
Trickle Charge	mA	70(0.02C)~175(0.05C)	Ta=0~40℃ (see note)	
Maximum Discharging Current	rging A 3.0C(Continuous)		Ta =0~50°C 0.8v cut off	
Storage Temperature	-20~+25(within 1 year) -20~+30(within 3 month) -20~+40(within 1 month) -20~+50(within 1 week)		*	
Typical Weight	g	75 approx	*	

5. PERFORMANCE

Before proceed the following tests, the cells should be discharged at 0.2C to 1.0V cutoff. Unless otherwise stated, tests should be done within one month of delivery under the following conditions:

Ambient temperature: $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$ Relative Humidity: $65 \pm 20\%$

Note Standard Charge/Discharge Conditions:

Charge: $350 \text{ mA}(0.1\text{C}) \times 16 \text{hrs}$ Discharge: 700 mA(0.2C) to 1.0 V/cell

Test	Unit	Specification	Condition	Remarks
Capacity	min	≥300	Standard Charge/Discharge	Up to 3 cycles are allowed
Open circuit Voltage (OCV)	V	≥1.25	Within 1 hr after standard charge	Unit cell
Internal Impedance (Ri)	mΩ	≤12	Upon fully charge at 1kHz	*



Ir-				
Low Temperature Discharge	min	≥240	Standard Charge, Storage:24hrs at $0\pm2^{\circ}$ C 0.2C discharge at $0\pm2^{\circ}$ C	1.0V/cell Cut-off
Overcharge	N/A	No conspicuous deformation and/or leakage	0.1C charge for 48hrs	*
Charge Retention	min	≥180min	Standard charge Storage: 28 days Standard discharge (0.2C)	1.0V/cell Cut-off
Cycle Life Test	Cycle	≥500	IEC61951-2 ED3.0	*
Humidity	N/A	No leakage	Standard charged, stand for 14 days at 33 $\pm 3^{\circ}$ and 80 $\pm 5\%$ of relative humidity	
External Short Circuit	N/A	No fire and no explosion	After standard charge, short-circuit the cell at 20 $^{\circ}$ C \pm 5 $^{\circ}$ C until the cell temperature returns to ambient temperature.(cross section of the wire or connector should be more than 0.75mm²)	*
Safety Device Operation	N/A	No explosion	Forced discharge at 0.2C to a final voltage of 0V,then the current be increased to 1C and forced discharge continue for 60 min	Leakage of electrolyte and Deformation are acceptable
Free falling(drop) N/A Ari		*		



4	Notes:
1.	Ta: Ambient Temperature
2.	
3.	Approximate charge time from discharged state, for reference only.
ა.	
	Please activate the battery once every 3 months according to the following method. Otherwise, may cause
	the battery capacity attenuation, reducing the battery service life and so on.
	Charge at 0.1C for 16 hrs, rest 10 min, then discharge with 0.2C to 1.0V/cell,rest 10 min, then charge at 0.2C
	to 150min.
6.	PRECAUTIONS TO ENSURE THE SAFETY ON BANDING BATTERY
	1
	Batteries should be charged prior to use.
	2.
	When using a new battery for the first time or after long term storage, please fully charge the battery before
	use.
	3.
	For charging methods please reference to our technical handbook.
	4.
	Use the correct charger for Ni-Cd or Ni-MH batteries.
	5
	Do not reverse charge batteries.
	6.
	Do not short circuit batteries, permanent damage to batteries may result.
	7.
	Do not incinerate or mutilate batteries, may burst or release toxic material. 8.
	Do not solder directly to cells or batteries.
	9.
	Do not subject batteries to adverse condition such as extreme temperature, deep cycling and excessive
	overcharge/over-discharge.
	10
	Store batteries in a cool dry place.
	11.
	Do not mix Akyga battery batteries with other battery brands or batteries of a different chemistry such
	as alkaline and zinc carbon
	12.

Do not mix new batteries in use with semi-used batteries, over-discharge may occur.



13.

Avoid batteries being used in an airtight compartment. Ventilation should be provided inside the battery compartment; otherwise batteries may generate hydrogen gas, which could cause an explosion if exposed to an ignition source.

14.

When connecting a battery pack to a charger, ensure correct polarity.

15.

If find any noise, excessive temperature or leakage from a battery, please stop its use.

16.

When the battery is hot, please do not touch it and handle it, until it has cooled down.

17.

Do not remove the outer sleeve from a battery pack nor cut into its housing.

18.

When find battery power down during use, please switch off the device to avoid over-discharge.

19.

When not using a battery, disconnect it from the device.

20.

Unplug a battery by holding the connector itself and not by pulling at its cord.

21.

After use, if the battery is hot, before recharging it, allow it to cool in a well-ventilated place out of direct sunlight.

22.

Never put a battery into water or seawater.

23.

During long term storage, battery should be charged and discharged once every 3 months.

24.

Do not attempt to take batteries apart or subject them to pressure or impact. Heat may be generated or fire may result. The alkaline electrolyte is harmful to eyes and skin, and it may damage clothing upon contact.

25.

Keep away from children. If swallowed, contact a physician at once.

26.

Battery failure, may not be thrown away, please recycling.

27.

Storage or transport, please let the battery apart and fixed, to prevent external short circuit .



Append: IEC61951-2 ED3.0 Endurance in cycles

NOTE-Actual cell temperature, not the ambient temperature, determines cell performance.

Table 5-Endurance in cycles

Cycle number	Charge	Stand in Charged condition	Discharge			
1	0.1C₅A for 16 h	None	0.25 C ₅ A for 2 h 20 min ²⁾			
2 to 48	0.25 C ₅ A for 3 h 10 min	None	0.25 C ₅ A for 2 h 20 min ²⁾			
49	0.25 C ₅ A for 3 h 10 min	None	0.25 C ₅ A to 1.0V/cell			
50	0.1 C ₅ A for 16 h	1h to 4h	0.2C ₅ A to 1.0V/cell			

- It is permissible to allow sufficient open-circuit rest time after the completion of discharge at cycle 50,so as to start cycle 51 at an exact two-week internal. A similar procedure may be adopted at cycles 100,150,200,250,300,350,400and 1000.
- If cell discharge voltage drops below 1.0V/cell, discharge may be discontinued.

Cycles 1 to 50 shall be repeated until the discharge duration on any 50th cycle becomes less than 3h at this stage, a further cycle as specified for cycle 50 shall be carried out. The endurance test is considered complete when two such successive cycles give a discharge duration less than 3h. The number of cycles obtained when the test is completed shall be not less than 500.