



MODEL NO.: USB-9V 500mAh Li-ION (V3)

DATE: 23-03-2023

Part No.: USB9V500MAH



1.1. Scope

This product specification is applicable to Akyga batteries Production of Li - Ion - 500mah 9V polymer lithium Ion battery. The product specification is applicable to Akyga batteries. Production of Li - Ion - 500 mah9vmah polymer lithium Ion battery. If you have any objection to the test project or the test method, please coordinate with Akyga batteries

1.2Product type

Model: USB-9V 500mAh Li-lon (V3)

2. Adopted Standard

GB/T18287-2000, The People's Republic of China General Regulations of Lithium Ion Battery for Cellular Phone.

3. Electrical Characteristics

No	Item	Parameter	Parameter	
1	Rating Voltage	7.4V		
	Composite	Typical: 500mAh	Typical: 500mAh	
2	Capacity	Minimum: 480mAh	Minimum: 480mAh	
3	Limited charge current	8.4V±0.05V	8.4V±0.05V	
4	Impedance	350mΩ (Max)	350mΩ (Max)	
5	Charging Mode	C.C/C.V.	C.C/C.V.	
_	Charging Method	USB port charge 5V1A - 5V3A adapter		
6		Positive negative metal hat		
7	Charging Time	Standard Charging	7Hours	
		Fast Charging	1.5 Hours	
8	End of Discharge Voltage	5.8V		
9	Overcharge Voltage	4.25±0.05V/cell		Detection of single battery voltage



10	Over Discharge Cut Off Voltage	2.8±0.10V/cell		Detection of single battery voltage
11	Over current protection	3—6.0A		
12	Short Circuit	You need to activate your charge		
13	Static power current protection board	100A (Max)		
14	Operating Temperature	Charging	0~45℃	
		Discharging	-20~60℃	
15	Storage Temperature	-5℃-35℃ Recommend(20±5℃)		Storage capacity should be 40%~50% full charge capacity
16	Cycle Life	500 cycle		0.2CCycle Life 0.2C
17	Typical Weight	26.8 g		

4 BatteryConstitution

NO.	Name	Model	Remark
1	Li-lon-500mAh 9V	Li-Ion-500mAh 9V	
2			
3	9 V shell cover R8	9 V shell cover R8	

5. Battery Performances Test Criterion

5.1 Appearance

There shall be no such defect as scratch, flaw, crack, rust, leakage, which may adversely affect commercial value of battery.

5.2 Measurement Apparatus

(1) Dimension Measuring Instrument

The dimension measurement shall be implemented by instruments with equal or more precision scale of 0.01mm.

(2) Voltmeter

Standard class specified in the national standard or more sensitive class having inner impedance not less than 10 $K\Omega/V$.



(3) Ammeter

Standard class specified in the national standard or more sensitive class. Total external resistance including ammeter and $\,$ ire is less than 0 01 Ω

(4) Impedance Meter

Impedance shall be measured by a sinusoidal alternating current method(AC 1kHz LCR meter).

5.3 Testing Condition (unless otherwise specified)

Temperature 20°C±5°C, Relative humidity: 60±20%, Atmosphere pressure: 86∼106Kpa.

5.4 Reliability Test

Item	Inspecting Method	Standard
High temperature performance	When the battery is standard charged, it shall be put into a chamber at (55±2)°C for 2h, then discharged at 1 0C 5 A constant current to 9 00V.	Discharging shall not be less than 48 minutes; and the battery appearance has no deform, no leak-out and no explosion.
Low temperature performance	When the battery is standard charged, it shall be put into chamber at (-20±2)℃ for 16-24h,then discharged at 0.2C₅A constant current to 3.00V before it is taken out and put into the temperature of (20±5)℃ for 2h for its appearance check with eyes	Discharging shall not be less than 3 hours; and the battery appearance has no deform, no leak-out and no explosion.
Electrical load maintenance ability	When the battery has completed standard charged, it shall be disconnected and put aside for 28 Days at (20±5)℃,then discharged at 0 2C₅A	Discharging shall not be less than 4 hours
Constant Humidity & Heat Requirement	As the battery has completed fast charging with constant current,it shall be put into the $(40\pm5)^\circ C$,90%-95%RH thermos humidistat for 48h; then taken out at $(20\pm5)^\circ C$ for 2h. Check its appearance with eyes. Obtain its discharging time after it is discharged at $1C_5A$ to its final voltage 6.00V.	The battery appearance shall have no distortion, no explosion, no fire, no smoke and no leak-out, and its discharging time should not be less than 36 minutes.
Vibration	After fully charging, fixing the battery onto the vibration platform. with amplitude 0.38mm circularly scanning vibrating in the frequency of 10HZ-55HZ from three directions X、Y、Z for 30min respectively in its scanning frequency velocity 10CT/min.	The battery appearance has no distortion, no explosion, no fire, no smoke and no leak-out. Battery open voltage should be over 7 4V



	After vibration testing, use a clip or directly fix the	
Bump	battery on to the platform in the direction of X、Y、Z vertical complementary axis, then adjust its acceleration and pulse duration as below to have a bump test. Pulse peak acceleration 100m/s2. Bumps per minute 40-80.Pulse duration 16ms. Bump times 1000±10.	The battery appearance has no distortion, no explosion, no fire, no smoke and no leak-out. Battery open voltage should be over 7.4V.
Free Drop	After bump testing, the battery shall be immediately dropped from the height of 1000mm (minimum height) onto a 18mm~20mm hard board on the cement floor. Free drop one time respectively from X、Y、Z positive and negative axis(six directions). After that, the battery is discharged at 1C5A to its final voltage.	The battery appearance has no distortion, no explosion, no fire, no smoke and no leak-out. Its internal construction nloosened discharging shall not be less than 48 minutes.
Overcharge Protection	When the battery is fully charged, go on loading for 8h with a twice rating voltage, 2.0C 5 A out put current, it starts the over charge protection function	The battery appearance has no distortion, no explosion, no fire, no smoke and no leak-out.
Over discharge Protection	The battery is discharged at 0.2C 5 A in the constant current till it reaches over discharge protection voltage at (20 ± 5) °C, connected with a 30Ω lead and discharged for 24h	The battery appearance has no distortion, no explosion, no fire, no smoke and no leak-out.
Short-circuit Protection	As the battery has completed charging, short circuit the positive and negative contacts with 0.1Ω resistor for 1h for appearance check, then disconnect the resistor between the contacts, the battery shall be charged at 1.0C5A mA in the constant current for 5S	The battery appearance has no distortion, no explosion, no fire, no smoke and no leak-out. Battery voltage should not be less than N*3.7V.
Heavy Collision	Putting the battery on the platform, using 9.1KG heavy hammer free drop from 0.61M height onto the fixed battery.	Allowing the battery to be deformed, but no explosion and no fire



Cycle Life	The battery shall be constantly charged at $1.0C_5A$ in the temperature of $(20\pm5^{\circ}C)$. When its voltage reaches 4.20V, it shall be charged to constant voltage charging. It shall not stop charging until its current is no more than $0.01C_5A$. Put it aside for $0.5h$ -1h then discharge with $1.0C_5A$ in the constant current to its final voltage9.00V. When the discharging is finished, the battery shall be put aside for $0.5h$ -1h and has the next charge and discharge recycle. The above recycle test shall be continued unless there are two continuous discharging time less than 36 minutes, which is taken as the end of the life.	its cycles shall be over 500 times.
------------	--	-------------------------------------

6. Shipment

The battery should be packed in cartons under the condition of half capacity 20-50% for shipment. The violent vibration, impaction or squeezing should be avoided in the transport process; neither is exposed in the sunlight nor rain. The batteries shall be shipped by normal transportation such as by road, by train, by ocean or by air.

7. Storage

The battery storage shall be in the clean and dry ventilation room at the temperature of $-5 \sim 35^{\circ}$ C and shall keep out of fire or heat and avoid touching corrosion elements. The batteries shall be charged every 6 months during storage. Both the stored cells in the process of the battery and the batteries in delivery shall be "first come, first use". The battery storage period is 12 months when into the warehouse. Batteries expired must have a thorough check. Only the applicable batteries can be dispatched to the purchaser; the inapplicable ones shall be rechecked, if it remains, the purchaser shall have the right to dispose bad ones.

8. Package and Marking

8.1 Package

According to the attached.

8.2 Marking

Every battery shall have the following Chinese characters: Product type rating voltage 7.4V rating capacity contacts plus or minus and warnings produce date lot No. manufacturer (or the marks of the above characters).



9. Protection Circuit


9.1BMS Parameter

Order no.	Project	The minimum value	The median	The maximum	Unit
1	Overcharge Voltage	4.20	4.25	4.30	V
2	Overcharge Voltage	4.05	4.10	4.15	V
3	Discharge voltage protection	2.60	2.70	2.80	V
4	Put the recovery voltage	2.90	3.00	3.1	V
5	Over Current	2.1—3.3			A
6	Static electricity flow	0.5	4	7	μ А

10.0 Battery dimension

MAX: W26.6mm*H48.0mm*T17.5mm

Attached to the battery pictures and functional annotation

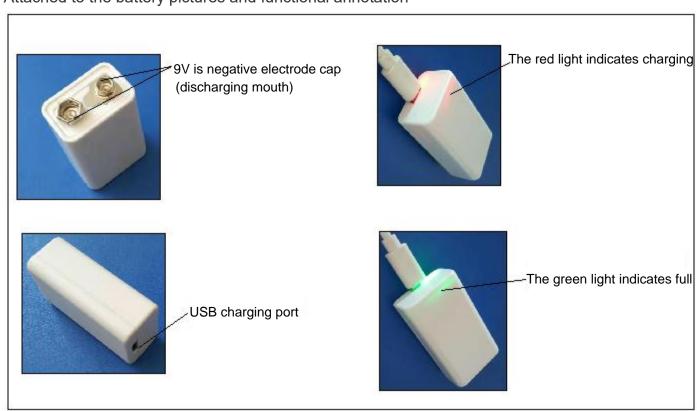



11. Appendix

11.1 Instructions and Safety Requirement

11.1.1 Recommending Usage

- 1 Please read the battery instructions and the label on its surface before use.
- **2** Use the battery indoors under normal condition, temperature: (20±5) °C, absolute humidity: 65±20%.
- **3** When in use, the battery shall be kept out of heat, high voltage and avoided children's touching. Do not drop the battery.
- **4** The battery can only be charged with a matching charging device, specifically (the electrical characteristic 3 6 charging method) do not charge the battery for more than 24 hours
- **5** Do not touch contacts together. Do not demolish or assembly the battery by yourself. Do not put the battery in the damp place to avoid danger
- **6** When not in use, please keep the battery in good condition and keep the battery in a semi-charged state. And every three months, the battery should be filled with electricity. Please wrap the battery in the non-conductive material to avoid direct contact with the battery, causing the battery to be damaged and keeping the battery cool and dry
- 7 Well disposed the disused battery. Do not put it into fire or water.

11.1.2 Hazard Warning

1 Forbid Disassemble Batteries

The battery has protective component and circuit internally to avoid danger. Mishandling such as improper disassembly will destroy its protective function and make it heat, smoke, distort or burning.

2 Forbid Short-circuit Batteries

Do not touch the plus and minus contacts with metals. Do not put the battery with metal element together in either storage or movement. If the battery is short-circuit, it carries magnified current, which will cause damage and make the battery heat, smoke, distort or burning.

3 Forbid heat and burn the battery

If heating or burning the battery, it will caused the isolated element in the battery dissolved, protection function stopped or the electrode burning, over heated, which will make the battery heat, smoke, distort or burning.

4 To avoid use the battery near the heat

Do not use the battery near the fire and stove, or over 80° C, and over heating will cause the battery internal short-circuit and make it heat, smoke, distort or burning.

5 Forbid bathing the battery

Do not dampen the battery, or even immerse it in the water, which will cause internal protection circuit and its function lost or abnormal chemical reactions, which will lead to heating, smoking, distortion or burning.



6 Avoid charging near fire or in the sunlight

Otherwise, it will cause internal protection circuit and its function lost or abnormal chemical reactions, which will lead to heating, smoking, distortion or burning.

7 Danger in using non-indicated chargers in

Charging in abnormal condition, the battery will cause internal protection circuit and its function lost or abnormal chemical reactions, which will lead to heating, smoking, distortion or burning.

8 Forbid Damage Battery

Do not allow damage the battery with the metals gouged, forged or dropped etc., otherwise, it will cause overheated, distort, smoke or burning, even in danger.

9 Forbid directly welding on the battery

Over-heated will cause the isolated element dissolved in the battery and losing protective function its cycle life, even will cause over-heated, distort, smoke or burning.

10 Forbid directly charging on the power socket or car kit cigarette

High voltage and amplified current will damage the battery and reduce its cycle life, even will cause overheated, distort, smoke or burning.

11 Do not use this battery for other equipment

Impropriate usage will damage the battery and reduce its cycle life, even will cause over-heated, distort, smoke or burning

12 Do not touch the leak-out battery 不

The leak-out electrolyte will cause the skin uncomfortable. If it drops into eyes, do not rob the eyes but wash in time and go to hospital for treatment

11.1.3 Warning

- 1 This battery cannot mix with deposal or twice- recycled batteries in use. Otherwise, for its abnormal charge and discharge it will cause over-heated distort smoke or burning
- 2 Keep the battery out of children s reach and prevent them biting or swallowing the battery.
- 3 Do not insert the battery onto the charger for a long time If charging beyond the normal time, the battery is still in the charger, please stop charging. The abnormal charging will cause battery over-heated, distort, smoke or burning
- **4** Do not put into microwave stove or any other pressure apparatus. Take the battery away from the cellular phone or the charger if it is instant heated or leak-out (or odors) and depose it. The bad battery will causes over-heated, smoke or burning.

11.1.4 Cautions

1 Notice

The battery shall be prevented to be exposed in effulgence so as not to cause over-heated, distort, smoke and weaken its performance and cycle life.



2 Electro Static-free

There is a protective circuit inside the battery to prevent contingency. Do not use the battery in the Electro static circumstances, (above 1000V), for it is easily destroyed the circuit board so that the battery doses not work and causes over-heated, distort, smoke or burning.

3 Discharging Temperature Range

Recommended discharging temperature range is 0-40°C, beyond which it will result in decadence of the battery performance and shortness of its life.

4 Read carefully the manual before use or whenever in need.

5 Charging Method

Use the special chargers in the recommended charging method to charge the battery.

6 First Usage

When you use the battery for its first time, do not put it into the cellular phone or any other equipment once you find it in unusual conditions such as unclearness or odors. The battery should be returned to the vendor.

7 Children Use

When Children use the battery they should be under their parents' instructions and superintend in use.

8 Avoid Children's Touch

Battery should keep out of the place where children in reach. Prevent children taking the battery out of the charger or the cellular phone to play.

9 To avoid the leak-out liquid be exposed to the skin or clothes. If touched, please wash by clean water so as not to cause the skin uncomfortable

10 Consultation

When you buy the battery, please note how to contact with the vendors, so that you may get intouch with vendors for consultation whenever in need

11 Guarantee period

Guarantee is one year since it is out of the factory. Life time:600 cycles. Any damage by incorrect use and not quality problem even in its guarantee period free service won't be provided by the manufacture

12 Safety Usage Guarantee

If the battery is used on other instruments, please contact with your manufacturer for how to get the best performance, at least consult its maximum current, fast charge and special application.

11.2 Quality Evaluation Programme

Quality evaluation composes of authoritative check and quality consistence check. Authoritative check is carried out on design decision, emended design and production decision. It should be confirmed by both Purchaser and Vendor on sampling proposal, check project, sequence and judgment etc., which in principle, should be all included. Quality consistence check should be divided into lot by lot check-up and periodical check-up, as to test the quality steadiness during the products in production (refer to GB2828—1987 standard). The detailed check-ups compose of appearance, internal resistance, rating capacity or 1C5A discharging capacity etc.



11.3 Environment Protection

This product accord with ROHS requirement.

11.4 Others

All the above are the agreed the battery descriptions and test regulation between Purchaser and Vendor. It can be carried out if there is no any new written agreement or modification notice occurred.