



# Lithium Manganese Dioxide Battery CR1025

CR1025-

1. Scope

These specifications are applicable to the manganese dioxide lithium batteries supplied by Akyga Battery

2. Applicable Battery Type Manganese dioxide Lithium Battery

3. Battery Type and Performance

3.1 Type CR1025

3.2 Nominal voltage 3.0 volts

3.3 Nominal discharge capacity 30mAh (Load: 68K ohm, End voltage 2.0V)

3.4 Outside dimensions As per drawing attached

3.5 Standard weight 0.55g

3.6 Guarantee 1 year (at the temperature of less than

25 deg. C and the relative humidity of

less than 75%RH.)

3.7 Appearance Will be free from flaw, stain,

deformation, uneven tone, electrolyte leakage and other defects which impair

the value of the commodity.

3.8 Brand Neutral.

3.9 Symbol of manufactured month

Manufactured month and year will be shown on the surface of the battery.

# Example:

21 (Manufactured in Jan, 2022)
22 (Manufactured in Feb, 2022)
20 (Manufactured in Oct, 2022)
2Y (Manufactured in Nov, 2022)
2Z (Manufactured in Dec, 2022)





# 4. Main reference

Ite	m	Unit	Figures	Condition	
Nominal Voltage		V	3.0	Only appropriated for CR Battery	
Nominal Volume		mAh	30	68kΩ continuously discharge load	
Instantaneous short-cut circuit		mA	≥100	time≤0.5 ′	
Open circuit Voltage		V	3.20~3.45	All CR Battery series	
Storage temperature		$^{\circ}$	0~30	All CR Battery series	
Appropriated temperature		$^{\circ}$	-20~60	All CR Battery series	
Standard weight		g	Appro0.55	Only appropriated for this item	
Discharge of life		%/yr	≤3	Only appropriated for this item	
	Initial	h	≥100		
Quick Test Use of life	After 12 months	h	≥97	Discharge load 10kΩ · Temperature  20±2°C · under the condition of related  humidity≤75%RH	



# 5. Specification of product and Test method

Exception for specified explanation, all tests should process under below conditions:

Test items		Test Methods	Standard	
1. Dimei	nsion	Use of caliper under precision is 0.02mm or more precise · to avoid short-circuit,	diameter ( mm ): 10.00 ( -0.20 )	
1. 5	151011	insulated materials should be put on the vernier caliper during test.	height ( mm ): 2.50 ( -0.20 )	
		Precision is 0.25% or more precise `		
2. Open	circuit voltage	resistance of internal circuit is bigger	3.20~3.45	
		than 1 M $\Omega$ DDM $^\circ$		
		Using pointer multimeter for test · the		
3. Instar	Instantaneous short-circuit	time is not more than $0.5^{\prime}$ · avoid	≥100mA	
		duplicated test · the time for next test		
		should be after half an hours.		
4. Appea	arance	Visual test	Will be free from flaw, stain, deformation, uneven tone, electrolyte leakage and other defects. Installed to utensils, both terminal of battery should be under good connections.	
		Standard Temperature 20±2℃ · related		
5. Quick	Quick Discharged Volume	humidity≤75%RH · discharge load	≥100 hours	
		$10 \text{k}\Omega$ · terminated voltage be 2.0V		
		Vibrate frequency 100-150 times per		
6. Vibrat	te test	min under continuously vibration for	Stability	
	emperature-resistant eeping performance	1 hour Storage 30 days Under 45±2 conditions	leakage %≤0.0001	



CR1025

ſ				
	8. Circuit load of weeping	When terminated voltage is 2.0V,	No	leakage
	performance	continuously discharge load for 5hrs	NO	leakage

#### Remark1:

- 1. Above tests were approved under plenty of experiments.
- 2.The company completely more stringent than the national standard issued by the GB/T8897 《primary batteries》 standards.
- 3.If necessary or under customer's specified requested, our company can adopt any test methods provided by customers.

#### 6.Service life

Load resistance	68,000 ohms
Discharge method	24 hours/day
End voltage	2.0V
Minimum duration (Initial)	680 hours
Minimum duration (After 12 months storage)	659.6 hours


Initial test : A test commencing within one month after delivery.

Stored test : A test conducted after 12 months storage under the specified conditions after delivery.

# 7. Discharge characteristics on load

# Voltage (V)

# Load 68.0KΩ

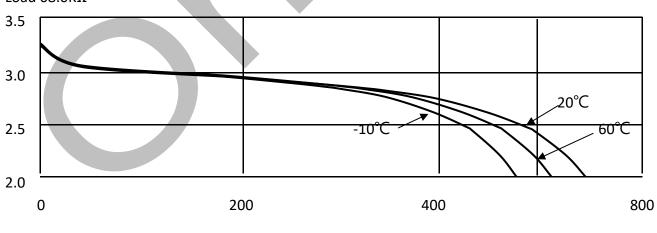

Discharge Time (Hours)

# 8. Battery Testing



# 8.1 Temperature and Humidity

#### 8.1.1 Conditions of Measurement

The battery will be measured under the conditions of temperature of 20+/-2 deg. C and relative humidity of 55%RH+/-20% unless otherwise stated.

# 8.1.2 Conditions of Storage

The sample batteries for testing will be stocked under the conditions of temperature of less than 25 deg. C and relative humidity of less than 75%RH.

The test will be carried out within 1 month after storage unless otherwise stated.

- 8.2 Instruments and Devices for Measurement
- 8.2.1 The DC voltmeter will be used to carry out voltage measurement that can measure from 0V to 4V. The accuracy of the voltmeter will be +/-1mV or it will be more accurate. The input impedance will be more than 10M ohm.
- 8.2.2 All the resistance of the external circuit load resistance will be comprised and the tolerance will be within 0.5%.
- 8.2.3 The caliper will be used to conduct dimension measurement and the range for measurement is from 0mm to 150mm. The accuracy is 5/100mm or more.
- 8.3 Testing systems

#### 8.3.1 Dimensions

The caliper is used as the instrument for measurement.

### 8.3.2 Appearance

The visual inspection is applied.

# 8.3.3 Open circuit voltage

The DC voltmeter is used to measure the voltage between both terminals

### 8.3.4 Service Life

The battery samples are kept under the condition of temperature of 20+/-5 deg. C for over 12 hours. The battery samples will be discharged persistently through the discharge load mentioned in Table 1. The discharge test will be conducted till the discharge voltage falls down to not less than the final voltage specified in Table 1. The discharge time is the





service life while the discharge voltage remains above the final voltage as stated.

8.3.5 Resistance of electrolyte leakage

The visual inspection is used for checking the state of the leakage. The battery will be put 30cm away under 40 watt fluorescent lamp at one meter above.

# 9. Limited warranty

If defective in materials or workmanship is identified, please return the product to Akyga Battery and the replacement will be delivered free of charge.

Please note that the only obligation under this warranty is the replacement of the battery. Other loss, damage, destruction, any legal liabilities, cost or expense including consequential loss of whatsoever nature, directly or indirectly caused by, resulting from or in connection with use of or inability to use the product are expressly excluded.

- (2) The work on the battery needs to comply with the instructions in this specification; otherwise, Akyga Battery cannot warrant any battery performance included but not limited to safety and the customer shall be responsible for all claims, demands, loss, damage, actions or proceedings, and costs (legal or otherwise) caused by this battery.
- (3) It is the customer's responsibility for the matching and reliability of batteries on actual set or unit application.
- (4) Akyga Battery will not be responsible for the following situations:
  - (i) Inappropriate handling, use, installation, or examination of the battery.
  - (ii)Do not comply with the instructions, attentions or warnings mentioned in this specification.
  - (iii) Do not comply with the instructions or advice of Akyga Battery

#### 10. Others

Subject the RoHS directive, this battery does not contain the following chemical substance: lead, mercury, cadmium, hexavalent chromium, bromic, fire retardants (polybrominated biphenyl (PBB), polybrominated diphenyl (PBDE)

#### **Instructions for Usage and Safety**





the battery is of utmost importance; otherwise, the battery could lead to distortion, leakage (accidental seepage of liquid), overheating, explosion, or fire and cause bodily injury or damage to equipment. Please strictly comply with the following instructions to avoid the occurrence of accident.

#### WARNING for Handling

# Do Not Ingest

The battery should be property stored and keep away from children in order to avoid them to put it into their mouths and ingest it. However, if it happens, you should immediately take them to the hospital.

# Do Not Recharge

The battery is not a rechargeable battery. You should never charge it as it could generate gas and internal short-circuiting, leading to distortion, leakage, overheating, explosion, or fire.

#### Do Not Make Hot

If the battery is being heated to more than 100 degree centigrade, it would increase the internal pressure resulting distortion, leakage, overheating, explosion, or fire.

#### Do Not Burn

If the battery is burnt or put to flame, the lithium metal will melt and cause explosion or fire.

#### • Do Not Dismantle

The battery should not be dismantled as it will cause damage to separator or gasket resulting distortion, leakage, overheating, explosion, or fire

#### Do Not Make Improper Setting

The improper setting of the battery could lead to short-circuiting, charging or forced-discharging and distortion, leakage, overheating, explosion, or fire could be occasioned as a result. When setting, the positive and negative terminals should not be reversed.

# • Do Not Short-circuit The Battery

The short-circuit should be avoided for positive and negative terminals. Do you carry or keep battery with metal goods; otherwise, battery could occasion distortion, leakage, overheating, explosion, or fire.

Do Not Directly Weld The Terminal or Wire to The Body of The Battery

The model of the Batt

The welding will cause heat and occasion lithium melted or insulating material damaged in the Page 8 of 11





battery. As a result, the distorting, leakage, overheating, explosion, or fire would be caused. The battery should not be soldered directly to equipment which it must be done only on tabs or leads. The temperature of soldering iron must not be over 50 degree C and the soldering time must not be more than 5 seconds; it is important to keep the temperature low and the time short. The soldering bath should not be used as the board with battery could stop on the bath or the battery could drop into the bath. It should avoid taking excessive solder because it could go to unintended portion on the board resulting short or charge of the battery.

- Do Not Use Different Batteries Together
  - It must be avoided for using different batteries collectively because batteries of different types or used and new or different manufacturers could occasion distortion, leakage, overheating, explosion, or fire. Please obtain advice fromAkyga Battery if it is necessary for using two or more batteries connected in series or in parallel.
- Do Not Touch The Liquid Leaked Out of Battery
   In case the liquid leaked and get into the mouth, you should immediately rinse your mouth. In case the liquid gets into your eyes, you should immediately flush eyes with water. In any event, you should go to the hospital and have proper treatment from a medical practitioner.
- Do Not Bring Fire Close to Battery Liquid
   If the leakage or strange smell is found, immediately put the battery away from fire as the leaked
   liquid is combustible.
- Do Not Keep in Touch with Battery
   Try to avoid keeping the battery in touch with the skin as it will get hurt.

# WARNING for Disposal

There are different regulations in different countries or regions and please comply with those regulations. In general, the insulating tape or friction tape should be used to cover the (+) and (-) terminals before disposal. It is because the discarded battery still has electric capacity and when it is in touch with other metals or materials, it could occasion distortion, leakage, overheating, or explosion.

# WARNING for Circuit Design for Back-up Use

The battery is not rechargeable. It is important that the diodes are applied for prevention of charging from the main power or other batteries when the battery is used for the device having memory or RTC back-up applications. In addition, the application of protective resistance is necessary as it can regulate the current as shown in the figure below. The following points have to be paid attention when choosing diodes and protective resistance.

- Supplied voltage to load
  - Due to the application of a diode and a resistance, the voltage generated will drop during operation, you are reminded to pay attention to these drops of voltage for supplied voltage to load.
- Prevent charging by applying diodes
   It is recommended to use the least leak current diodes. The charged capacity owing to leak
   Page 9 of 11

CR1025



current should be maintained within 1% of nominal capacity.

Using and setting protective resistance

In order to refrain from changing the battery by large surges of current when the diode is failed, the protective resistance should be applied. It is recommended to adjust the protective resistance to make the maximum current not over the figures as stated in the table.

# CAUTION (Handling / Storage)

• Do Not place the battery in ultrasonic

The short-circuit may be caused if the battery is placed in ultrasonic as the materials inside may be powdered occasioning distortion, leakage, overheating, explosion, or fire.

- Do Not roughly handle the battery
  - Distortion, leakage, overheating, explosion, or fire might be caused if the battery is received heavy impact or strong shock.
- Do Not short-circuit the battery while putting into equipment
  It is advised to put the battery to the equipment in a prudent way. It is because the short-circuit may occurs to the battery through metal parts of the equipment.
- Do Not maintain contact pressure less than 2N
   Due to the poor contact condition, the intended value may be higher than the battery voltage.
   For appropriate contact resistance, the contact pressure must be maintained not less than 2N.
- Do Not wrongly match the battery and equipment
   Please use the proper battery conforming to the handling manual of the equipment. It is because the specifications or types of equipment are different and the battery may not fit all kinds of equipment.
- Do Not put the battery in hot place such as under the sun or in the car in the daytime

  If the battery is put in hot place, it may cause distortion, leakage, overheating, explosion, or fire of the battery.
- Do Not allow the battery touch water
   If the battery touches water may occasion distortion, leakage, overheating, explosion, or fire.
   It may also generate rust.
- Do Not stock the battery in the condition of high humidity and heat
   In the high humid and hot condition, the battery may deteriorate. It may cause the battery distorted, leaked, overheated, or exploded.



# **SPECIFICATION FOR INSPECTIONS**

It is guaranteed that this specification of the inspections will be fulfilled by our products. Akyga shall identify the cause of the problem and proceed to take remedial actions if the products do not fulfill this specification of inspections.

# 1. Quality Standard

The product specification will be conformed.

# 2. Unit of Inspections

One battery will be taken as one unit of inspection.

#### 3. Definition of Lot

A batch of products that are manufactured by the same production lines with the same lot code mark.

#### 4. Test Method

The product specification will be conformed.

# 5. Sampling Plan

The following table is referred and is only used for the initial test.

	Inspection Item	Inspection Plan	Sampling Level	A.Q.L
1	Dimensions	GB/T8897.2-2021	China National	1.0
		GB/18897.2-2021	Standard	
2	Open Circuit Voltage	GB/T8897.2-2021	China National	1.0
			Standard	
3	Appearances	CD/T0007 2 2021	China National	1.5
		GB/T8897.2-2021	Standard	

Major Defect: If there is failure on the functions of the products, it will be construed as major defect.

Others: Defect that is distinguished from Major Defect.

The operating features by attributes are used as a base for sampling inspections.