

APPROVAL SHEET

MESSRS	
BRAND	akyga battery
PRODUCT	3.0V LITHIUM-MANGANESE BUTTON CELL
MODEL	CR2032
PREPARED BY	
APPROVED BY	
DATE	FEB. 20, 2019

CUS	STOMER APPR	OVAL RECORE)
COMPANY NAME	DEPART- MENT	APPROVED BY	DATE



1. **[SCOPE]**

This specification applies to the following 3.0v lithium button cell CR2032 (high capacity of 230mAh)

2. **[RATINGS]**

TABLE I:

I	ITEM	UNIT	SPECIFICATIONS	CONDITIONS
Nomir	nal voltage	V	3.0	
Nomin	al capacity	mAh	230	Standard discharge with load 15kΩ
	ous short–circuit urrent	mA	≥250	Time \leqslant 0.5 second
Off-lo	ad voltage	V	≥3.2	
Operatin	g temperature	°C	-20~60	
Stand	ard weight	g	3.1	Unit cell
Service	Initial	Standard	1300 h	Continuously discharge with load $15k\Omega$, temperature at 20°C,
output	After 12 months storage	Standard	1200 h	humidity at 65±20% till 2.0v end-voltage

TABLE II:

ITEM	CONDITIONS	CHARACTERISTICS	
Thermal durability	Kept for 20 days at 60°C±3°C, then continuously discharge with $15k\Omega$ load till 2.0v end-voltage	Standard	1200 h
Self-discharge rate	Stored for 12 months at normal temperature and humidity	\$	5%

3. [PERFORMANCE AND TEST METHODS]

Unless otherwise stated, all the testing is carried out under the condition: environmental temperature, $20^{\circ}C\sim25^{\circ}C$; environmental humidity, $65\pm20\%$. Please refer to Table III

4. **[SUGGESTIONS AND CAUTIONS]**


- 4.1 Install batteries correctly.
- 4.2 Ensure the contact points to be clean and conductive.
- 4.3 Do not mix different types, different brands batteries to serve together.
- 4.4 Do not heat, recharge the batteries.
- 4.5 Do not dispose of the batteries in fire.
- 4.6 Keep away from the small children, if swallowed promptly see doctor.
- 4.7 Pay attention to the producing date.



TAE	BLE III:			
No	ITEM	TEST METHODS	STA	ANDARED
1	Dimensions	Using vernier caliper (accuracy≥0.02) while	Diameter	20.0 (-0.2) mm
	Dimensions	avoiding short-circuit	Height	3.2 (-0.2) mm
2	Off-load voltage	Using multimeter (accuracy \geq 0.25%) internal resistance \geq 1M Ω		≥3.2 v
3	Instantaneous short-circuit current	Time of short-circuit should be less than 0.5 second and avoid repeated test within half an hour	/\\	≥250 mA
4	Appearance	Eyeballing	Bright, cle leakage, Ar	an, no rust, no nd no flaw
5	Capacity	Continuously discharge for 8 hours with load $15k\Omega$, temperature at 20~25°C, humidity at $65\pm20\%$ till 2.0v end-voltage (for fresh battery only; within 3 months)		≥1300 h
6	Vibration test	Put battery on the platform of the vibrations machine, start the machine and adjust the frequency form 10 times per minute to 15 times per minute. keep it running for an hour	Characteris	stics keep stability
7	Leakage at high temperature test	Stored under temperature (60°C) for 7 days	No lea	kage allowed
8	Over discharge Test	After 2.0v end-voltage, continuously discharged for 5 hours	No lea	kage allowed

5. **CUTAWAY DIAGRAM OF 3.0V LITHIUM MANGANESE DIOXIDE BUTTON CELL**

Cutaway Diagram of 3.0V Lithium Manganese Dioxide Button Cell

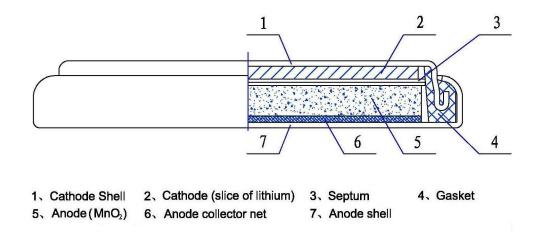



6. [DISCHARGE CHARACTERISTICS]


SPECIFICATIONS




Model No.	CR2032	Dimensions (mm)
Nominal Voltage	3 (V)	
Nominal Capacity	230 (mAh)	
Load Resistance	15 (kΩ)	
Weight	3.0 (g)	
Using Temperature	-20℃~60℃	

STANDARD CHARACTERISTICS


Discharge Characteristics




Temperature Characteristics



Load-capacity



Pulse Discharge Characteristics





7. [Battery Drawing]

