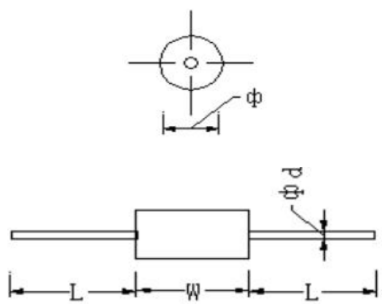


Metallized Polyester Axial Type Film Capacitor

Primary characteristics		
Parameter	Value	Unit
Capacitance	3.3	μF
Rated voltage	250	VDC

Features

- Axial type
- Pb-free and RoHS compliant

Case dimensions				
				
Unit	W	D	Φd	L
mm	30.5 ±1.0	10.5 ±1.0	0.8 ±0.1	40 ±5.0

Part numbering system				
FPEA	106	J	250	XRR
↓ Series code	↓ Capacitance (10pF × 10 ⁶ = 10μF)	↓ Capacitance tolerance J – ±5% K – ±10%	↓ Rated voltage	↓ Internal code

Specifications		
Parameter	Value	Unit
Temperature range	-40 ~ 105	°C
Standard capacitance (C _R)	3.3	μF
Capacitance tolerance	±5	%
Rated voltage	250	VDC

Ordering information			
Part Number	Package	Shipping Quantity	Dimensions
FPEA335J250XRR	10.5 x 30.5 mm	100 pcs/polybag 2000 pcs/box	--- 57 x 35 x 30 cm

Disclaimer

Akyga passive reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Akyga passive or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on Akyga passive data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Akyga passive does not assume any liability arising out of the application or use of any product or circuit. Akyga passive products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Akyga passive. Customers using or selling Akyga passive components for use in such applications do so at their own risk and shall agree to fully indemnify Akyga passive and its subsidiaries harmless against all claims, damages and expenditures.