



# **EC2SBW SERIES**

## **10 WATT 4:1 INPUT**

## **DC-DC CONVERTERS**



### **FEATURES**

- \* 10W Isolated Output
- \* 1"×1"×0.4" Shielded Metal Case
- \* Efficiency to 86%
- \* 4:1 Input Range
- \* Regulated Outputs
- \* Input Under Voltage Protection
- \* Remote On/Off
- \* Continuous Short Circuit Protection
- \* Without Tantalum Capacitors Inside
- \* CE Mark Meets 2014/30/EU
- \* Safety Meets UL60950-1, EN60950-1, and IEC60950-1



<b>MODEL NUMBER</b>	<b>INPUT VOLTAGE</b>	<b>OUTPUT VOLTAGE</b>	<b>OUTPUT CURRENT</b>		<b>INPUT CURRENT</b>		<b>% EFF.</b>	<b>CAPACITOR LOAD MAX.</b>
			<b>MIN.</b>	<b>MAX.</b>	<b>NO LOAD</b>	<b>FULL LOAD</b>		
EC2SBW-24S33	9-36 VDC	3.3 VDC	0 mA	2500 mA	5 mA	425 mA	81	3300uF
EC2SBW-24S05	9-36 VDC	5 VDC	0 mA	2000 mA	5 mA	496 mA	84	2200uF
EC2SBW-24S12	9-36 VDC	12 VDC	0 mA	835 mA	10 mA	486 mA	86	1000uF
EC2SBW-24S15	9-36 VDC	15 VDC	0 mA	666 mA	10 mA	486 mA	86	680uF
EC2SBW-24D05	9-36 VDC	± 5 VDC	0 mA	±1000 mA	10 mA	496 mA	84	1200uF
EC2SBW-24D12	9-36 VDC	± 12 VDC	0 mA	±416 mA	10 mA	486 mA	86	470uF
EC2SBW-24D15	9-36 VDC	± 15 VDC	0 mA	±333 mA	10 mA	486 mA	86	330uF
EC2SBW-48S33	18-75 VDC	3.3 VDC	0 mA	2500 mA	5 mA	210 mA	82	3300uF
EC2SBW-48S05	18-75 VDC	5 VDC	0 mA	2000 mA	5 mA	248 mA	84	2200uF
EC2SBW-48S12	18-75 VDC	12 VDC	0 mA	835 mA	5 mA	243 mA	86	1000uF
EC2SBW-48S15	18-75 VDC	15 VDC	0 mA	666 mA	5 mA	243 mA	86	680uF
EC2SBW-48D05	18-75 VDC	± 5 VDC	0 mA	±1000 mA	5 mA	248 mA	84	1200uF
EC2SBW-48D12	18-75 VDC	± 12 VDC	0 mA	±416 mA	8 mA	243 mA	86	470uF
EC2SBW-48D15	18-75 VDC	± 15 VDC	0 mA	±333 mA	8 mA	243 mA	86	330uF

NOTE: 1. Nominal Input Voltage 24 or 48 VDC

# SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

## INPUT SPECIFICATIONS:

Input Voltage Range	24V	9 – 36V
	48V	18 – 75V
Input Surge Voltage (100ms max.)	24V	50Vdc max.
	48V	100Vdc max.
Under voltage lockout	24Vin power up	8.8V typ.
	24Vin power down	8.0V typ.
	48Vin power up	17V typ.
	48Vin power down	16V typ.

Input Filter ..... LC Type

Positive Logic Remote on/off Control (note3):

Logic Compatibility	CMOS or Open Collector TTL, Ref. to -Vin
Module ON	>+3.5V to 36VDC or Open Circuit
Module OFF	0 to <1.2VDC

## OUTPUT SPECIFICATIONS:

Voltage Accuracy ..... ±1.5% max.

Voltage Balance (Dual) ..... ±1.0% max.

Transient Response: 75% - 100% Step Load Change

Error Band ..... 5% Vout nominal, Recovery Time ..... <500us

Ripple & Noise, 20MHz BW (note4)

Vo=3.3 & 5V ..... 75mV pk-pk max.

Vo=12 & 15V ..... 100mV pk-pk max.

Temperature Coefficient ..... ±0.03%/°C

Short Circuit Protection ..... Continuous

Line Regulation(note1) ..... ±0.5% max.

Load Regulation(note2) ... Single ..... ±0.5% max.

Dual ..... ±1.0% max.

Cross Regulation(Dual output) Load cross variation 25%/100% .... ±5% max

Over Voltage Protection ..... Zener or TVS Clamp

External Trim Adj. Range (Single Output Models Only) ..... ±10%



Start up time ..... 3.5ms typ.

## SIZE SB Dimensions:

NOTE: Pin Size is 0.04±0.004 Inch (1.0±0.1 mm)DIA

All Dimensions In Inches (mm)

Tolerances      Inches: X.XX= ±0.02 , X.XXX= ±0.010  
Millimeters: X.X= ±0.5 , X.XX=±0.25

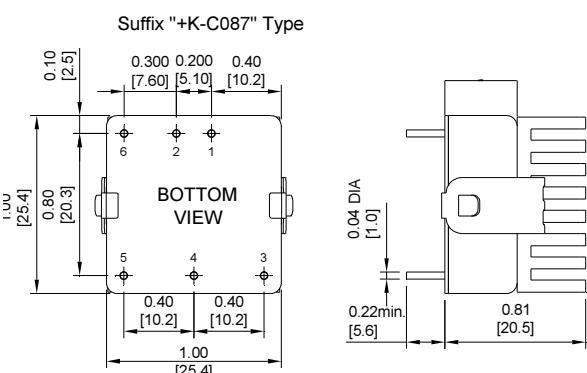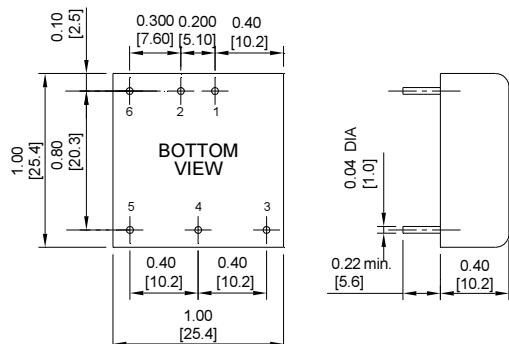


## GENERAL SPECIFICATIONS:


Efficiency	See Table
Isolation Voltage	1500 VDC min.
Isolation Resistance	10 <sup>9</sup> ohm min.
Isolation Capacitance	1000pF typ.
Switching Frequency	100KHz min.
Operating Ambient Temperature Range	-40°C to +85°C
Derating, Above 71°C (note7)	Linearly to Zero Power at +105°C
Case Temperature (note5)	105°C max.
Cooling	Natural Convection
Storage Temperature Range	-55°C to +125°C
Humidity	95% RH max. Non condensing
MTBF	MIL-HDBK-217F, GB ..... 1300Khrs typ.
Dimensions	1.00x1.00x0.4 inches (25.4x25.4x10.2 mm)
Case Material	Black Coated Copper with Non-Conductive Base
Weight	18g

## NOTE :

1. Measured from high line to low line.
2. Measured from full load to min. load.
3. Suffix "N" to the model number with negative logic remote on/off
  - Module on ..... 0 to <1.2VDC
  - Module off ..... >+3.5VDC to 36VDC or open circuit
4. The output ripple and noise is measured with 10uF tantalum and 1uF ceramic capacitor across output.
5. Maximum case temperature under any operating condition should not be exceeded 105°C.
6. Suffix "+K-C087" type with heat sink.
7. Others model refer to application note.

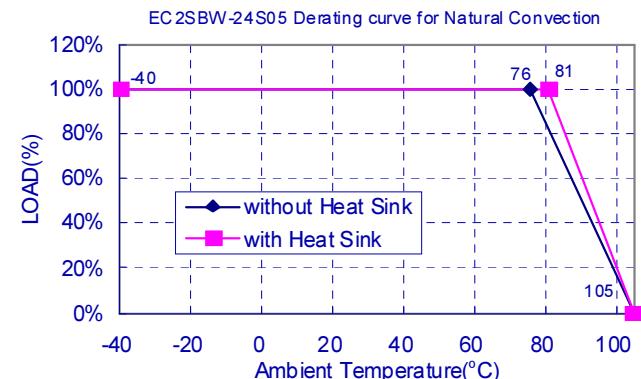

## EXTERNAL OUTPUT TRIM

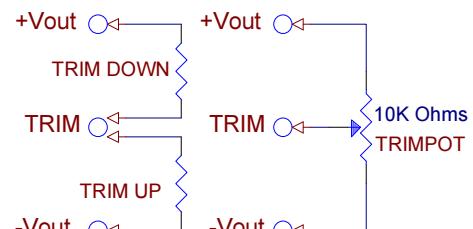

PIN CONNECTION		
Pin	Single	Dual
1	+Input	+Input
2	-Input	-Input
3	+V Output	+V Output
4	Trim	Common
5	-V Output	-V Output
6	Remote	Remote