NMS Series





FEATURES

- RoHS compliant
- UL1950 recognized
- Efficiency to 82%
- Power density up to 0.44W/cm³
- Dual outputs
- Low profile package
- UL 94V-0 package material
- No heatsink required
- Footprint 4.75cm²
- 6kVDC isolation
- 5V & 12V input
- 5V, 9V, 12V and 15V output
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- MTTF up to 747 kHrs
- PCB mounting

DESCRIPTION

The NMS series of DC/DC converters are UL1950 recognized which makes them ideal for all telecom and safety applications where approved isolation is required. The low profile package allows mounting in rack systems without risk of touching other boards. The output configuration allows all of the rated power to be drawn from a single pin provided the total load does not exceed 2 watts. The devices feature low noise and low isolation capacitance suiltable for applications in high noise environments, e.g. heavy electrical machine interface.



www.murata-ps.com

6kVDC Isolated 2W Dual Output DC/DC Converters

SELECTION GUIDE

Order Code	Nominal Input Voltage	Output Voltage	Output Current	Efficiency	Isolation Capacitance	MTTF ¹
	V	V	mA	%	pF	kHrs
NMS0505C	5	±5	±200	74	1.8	747
NMS0509C	5	±9	±111	76	1.9	327
NMS0512C	5	±12	±83	77	2.0	169
NMS0515C	5	±15	±67	78	2.1	93
NMS1205C	12	±5	±200	78	1.9	365
NMS1209C	12	±9	±111	81	2.0	224
NMS1212C	12	±12	±83	82	2.1	136
NMS1215C	12	±15	±67	82	2.2	82

When operated with additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Voltago rango	Continuous operation, 5V input types	4.5	5	5.5	V
Voltage range	Continuous operation, 12V input types	10.8	12	13.2	V

OUTPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Rated Power ²	T _A =0°C to 70°C			2	W
Voltage Set Point Accuracy	See tolerance envelope	-7.5		10	%
Line regulation	High VIN to low VIN		1.0	1.2	%/%
	10% load to rated load, 5V output types		10	15	
Lood Pogulation	10% load to rated load, 9V output types		6	15	%
Load Regulation	10% load to rated load, 12V output types		6	15	70
	10% load to rated load, 15V output types		6	15	
Ripple and Noise	BW=DC to 20MHz, all output types			200	mV p-p

ISOLATION CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Isolation test voltage	Flash tested for 1 second	6000			VDC
Resistance	Viso= 500VDC		10		GΩ

GENERAL CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Switching frequency	All input types		35		kHz

ABSOLUTE MAXIMUM RATINGS	
Short-circuit protection ³	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Internal power dissipation	900mW
Input voltage V _{IN} , NMS05 types	7V
Input voltage VIN, NMS12 types	15V

1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.

2. See derating graph.

3. Supply voltage must be disconnected at the end of the short circuit duration.

All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.


muRata Ps Murata Power Solutions

NMS Series

6kVDC Isolated 2W Dual Output DC/DC Converters

TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Specification	All output types	0		70	
Storage		-50		130	°C
Case Temperature above ambient	All output types			32	
Cooling	Free air convection				

TEMPERATURE DERATING GRAPH



TOLERANCE ENVELOPE +10% +5% V_{NOM} -2.5% -7.5% -7.5% -7.5%

SAFETY APPROVAL

The NMS series has been recognised by Underwriters Laboratory (UL) to UL 60950 for supplementary insulation up to 300Vrms and reinforced insulation up to 150Vrms working voltage.

File number E179522 applies.

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMS series of dc/dc converters are all 100% production tested at their stated isolation voltage. This is 6kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

The NMS series has been recognized by Underwiters Laboratory to a working voltage of 300Vrms for Supplementary Insulation system and 150Vrms for Reinforced Insulation systems.


REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

muRata Ps Murata Power Solutions

NMS Series

6kVDC Isolated 2W Dual Output DC/DC Converters

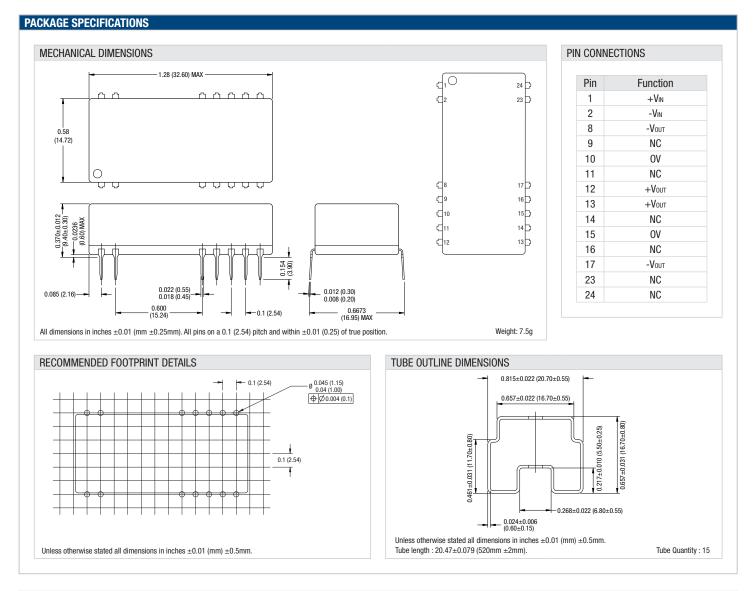

RoHS COMPLIANCE INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on this product series is Matte Tin over Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems. For further information, please visit www.murata-ps.com/rohs

muRata Ps Murata Power Solutions

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. @ 2008 Murata Power Solutions, Inc.

Ľ	USA:	Mansfield (MA), Tel: (508) 339-3000, email: sales@murata-ps.com
L	Canada:	Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com
L	UK:	Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
L	France:	Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
L	Germany:	München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com
	Japan:	Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com Website: www.murata-ps.jp
	China:	Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com

Technical enquiries - email: mk@murata-ps.com, tel: +44 (0)1908 615232