


Huawei P/N: LB2G100MG200A00CE0	CHANGZHOU HUAWEI ELECTRONICS CO.,LTD LB 400V 10 μ F 10*20	Page:1/1
-----------------------------------	---	----------

Customer : Ropla Elektronik Sp. z o.o.
Customer P/N :

Diagram Of Dimensions

unit: mm

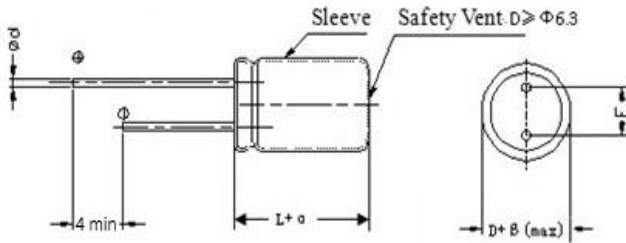

D	10	L	20
βMax	+0.5	αMax	+2.0
F±0.5	5.0	d±0.05	0.60

β 为 D 值公差 / α 为 L 值公差

Items	Performance					
Operating Temperature Range	-40℃ ~ +105℃					
Capacitance Tolerance	-20% ~ +20% (120Hz, 20℃)					
Surge Voltage	450VDC					
Leakage Current	LC ≤ 90μA After 2 minutes					
Dissipation Factor (Tan δ)	≤ 0.20 (120Hz, 20℃)					
ESR	4.5 Ω (100KHz, 25℃)					
Ripple Currents	260mA (100KHz, +105℃)					
Low Temperature Characteristics(120Hz)	Z-40℃ / Z+20℃			7		
Ripple Current & Frequency Multipliers	Frequency(Hz)	50	120	1K	10K	100K
	Coefficient	0.40	0.50	0.80	0.90	1.00
Life Test: Load Life Test: After 6000 Hrs at 105℃ Shelf Life Test: After 1000 Hrs at 105℃	Capacitance Change	Load Life: Within ±20% of initial value				
		Shelf Life: Within ±20% of initial value				
	Dissipation Factor	Load Life: Less than 200% of specified value				
		Shelf Life: Less than 200% of specified value				
Leakage current	Load Life: Within specified value					
	Shelf Life: Less than 200% of specified value					
Solder ability	245 ± 5℃, 2 ± 0.5 seconds. soldering must cover more than 95%					
Standards	IEC-60384					
Remarks	RoHS Compliance & Halogen-Free					

Publish Date	29-Nov-2023	Approval Signatures:	Approved	Checked	Designed
Revise Date					
Edition No.	1		Please return one copy with your approval		