


Huawei P/N: LE2G6R8MG125A00CE0	<b>CHANGZHOU HUAWEI ELECTRONICS CO.,LTD</b> LE 400V 6.80 μ F 10*12.5	Page:1/1
-----------------------------------	---	----------

Customer : Ropla Elektronik Sp. z o.o.  
Customer P/N :

Diagram Of Dimensions

unit: mm

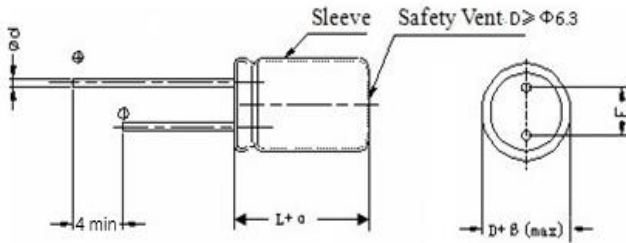

D	10	L	12.5
βMax	+0.5	αMax	+1.5
F±0.5	5.0	d±0.05	0.60

β 为 D 值公差 / α 为 L 值公差

Items	Performance					
Operating Temperature Range	-40°C ~ +105°C					
Capacitance Tolerance	-20% ~ +20% (120Hz, 20°C)					
Surge Voltage	450VDC					
Leakage Current	LC ≤ 64.4μA After 2 minutes					
Dissipation Factor (Tan δ)	≤ 0.20 (120Hz, 20°C)					
ESR	8.7 Ω (100KHz, 25°C)					
Ripple Currents	180mA (100KHz, +105°C)					
Low Temperature Characteristics(120Hz)	Z-40°C / Z+20°C			7		
Ripple Current & Frequency Multipliers	Frequency(Hz)	120	50	10K	1K	100K
	Coefficient	0.50	0.40	0.90	0.80	1.00
Life Test: Load Life Test: After 10000 Hrs at 105°C Shelf Life Test: After 1000 Hrs at 105°C	Capacitance Change	Load Life: Within ±20% of initial value				
		Shelf Life: Within ±20% of initial value				
	Dissipation Factor	Load Life: Less than 200% of specified value				
		Shelf Life: Less than 200% of specified value				
Leakage current	Load Life: Within specified value					
	Shelf Life: Less than 200% of specified value					
Solder ability	245 ± 5°C, 2 ± 0.5 seconds. soldering must cover more than 95%					
Standards	IEC-60384					
Remarks	RoHS Compliance & Halogen-Free					

Publish Date	18-Oct-2024	Approval Signatures:	Approved	Checked	Designed
Revise Date			詹光耀 研发中心	魏丽芳 研发中心	钱卢苏蒙 研发中心
Edition No.	1		Please return one copy with your approval		