


## **GLASS PASSIVATED BRIDGE RECTIFIERS**

## REVERSE VOLTAGE - 600 Volts FORWARD CURRENT - 8.0 Amperes

## **FEATURES**

- ●Surge overload rating -200 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has U/L the flammability classification 94V-0
- Mounting postition: Any

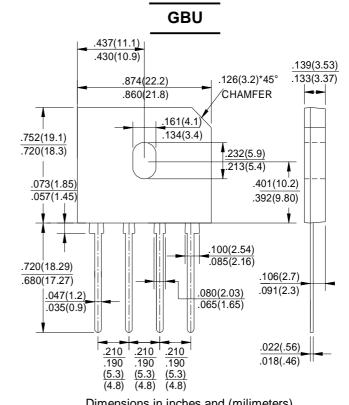

Dimensions in inches and (milimeters)

## **MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.


For capacitive load, derate current by 20%


For capacitive load, derate current by 20%			
CHARACTERISTICS	SYMBOL	GBU806F	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	600	V
Maximum RMS Voltage	VRMS	420	V
Maximum DC Blocking Voltage	VDC	600	V
Maximum Average Forward (with heatsink Note 2)  Rectified Current @ Tc=100°C (without heatsink)	I(AV)	8.0 3.2	А
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	lғsм	200	А
Maximum Forward Voltage at 4.0A DC	VF	0.95	V
Maximum DC Reverse Current @ TJ=25°C at Rated DC Blocking Voltage @ TJ=125°C	lR	10.0 500	μА
I <sup>2</sup> t Rating for Fusing (t<8.3ms)	l <sup>2</sup> t	166	A <sup>2</sup> s
Typical Junction Capacitance Per Element (Note1)	CJ	60	pF
Operating Temperature Range	TJ	-55 to +150	$^{\circ}$
Storage Temperature Range	Тѕтс	-55 to +150	$^{\circ}$


NOTES: 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.


2.Device mounted on 75mm\*75mm\*1.6mm Cu plate heatsink.




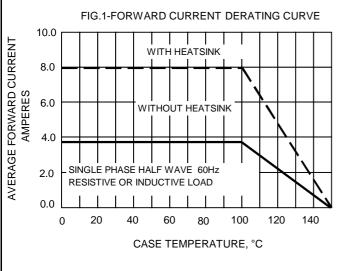

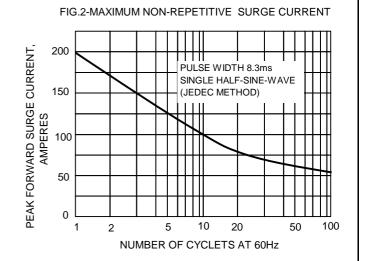

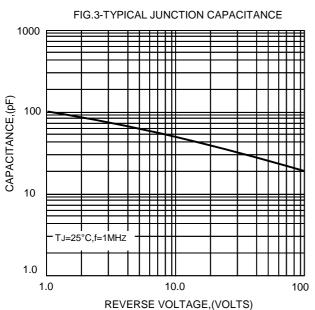

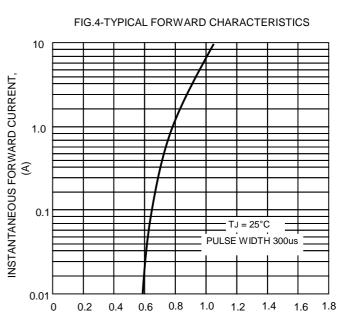

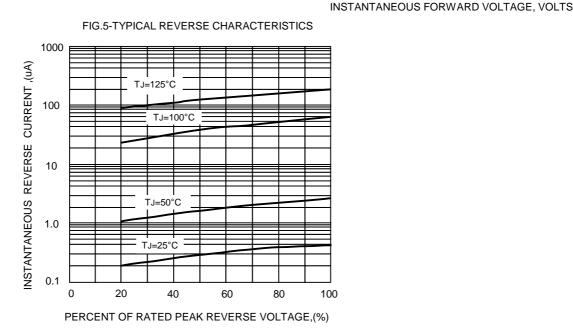

REV. 1, 18-Oct-2013