SBR25G SERIES

GLASS PASSIVATED 3 PHASE BRIDGE RECTIFIERS

REVERSE VOLTAGE 800 to 1600 Volts FORWARD CURRENT -25 Ampreres

FEATURES

- ●Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- ●Ideal for Printed Circuit Boards


MECHANICAL DATA


- ◆Case:Epoxy Case with Heat Sink Interally Mounted in the Bridge Encapsulation
- ●Terminals:Plated Leads Soiderable per MIL-STD-202, Method 208
- ●Polarity:As Marked on Body
- Weight:21 grams(approx.)
- •Mounting Position:

Bolt Down on Heatsink With Silicone Thermal Compound Between Bridge and Mounting Surface for Maximum Heat Transfer Efficiency


●Mounting Torque:2 N · m

SBRG





-10



-16

UNIT

Dimensions in inches and (milimeters)

-14

-12

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

CHARACTERISTICS

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%


SYMBOL

VOLTAGE RATINGS

011/11/01/01/00	-						_
Peak Repetitive Voltage	VRRM						
Working Peak Reverse Voltage	VRWM	800	1000	1200	1400	1600	V
DC Blocking Voltage	VR						
Peak Non-Repetitive Reverse Voltage	VRSM	900	1100	1300	1500	1700	V
RMS Reverse Voltage	VR(RMS)	560	700	840	980	1120	V
FORWARD CONDUCTION							
CHARACTERISTICS	SYMBOL	SBR25G					UNIT
Maximum Average Forward	lo	25					Α
Rectified Current @TC=55°C	25						_ ^
Peak Forward Surge Current t=8.3ms at 60HZ	Iгsм	320					Α
I2t Rating for fusing	l ² t	840					$A^2 S$
Maximum Forward Voltage drop per element at 12.5A Peak	VF	1.1					V
Reverse peak current $V_R=V_{RRM}@T_J=25^{\circ}C$ $V_R=V_{RRM}@T_J=150^{\circ}C$		5					μΑ
	lR	3					mA
RMS Isolation Voltage from Case to Lead	Viso	2500					V
THERMAL CHARACTERISTICS							
Operating Temperature Range	TJ	-40 to +150					$^{\circ}\!\mathbb{C}$
Storage Temperature Range	Тѕтс	-40 to +125					$^{\circ}$

-08



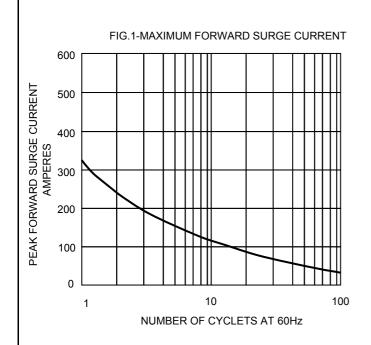

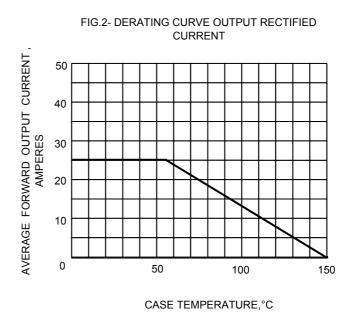


FIG.3-TYPICAL FORWARD CHARACTERISTICS


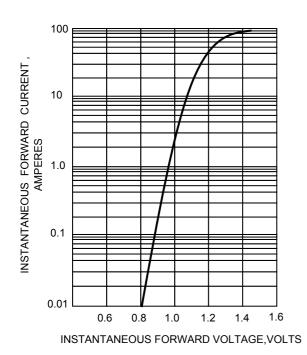


FIG.4-TYPICAL REVERSE CHARACTERISTICS

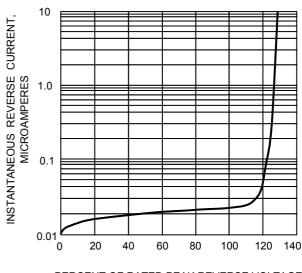

PERCENT OF RATED PEAK REVERSE VOLTAGE

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!