

SBR35GW SERIES

GLASS PASSIVATED 3 PHASE BRIDGE RECTIFIERS

REVERSE VOLTAGE 50 to 1600 Volts FORWARD CURRENT -35 Ampreres

SBR-W

FEATURES


- ●Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- ●Ideal for Printed Circuit Boards

MECHANICAL DATA

- ◆Case:Epoxy Case with Heat Sink Interally Mounted in the Bridge Encapsulation
- ●Terminals:Plated Leads Soiderable per MIL-STD-202, Method 208
- Polarity: As Marked on Body
- ●Weight:21 grams(approx.)
- Mounting Position:

Bolt Down on Heatsink With Silicone Thermal Compound Between Bridge and Mounting Surface for Maximum Heat Transfer Efficiency

● Mounting Torque: 2 N · m

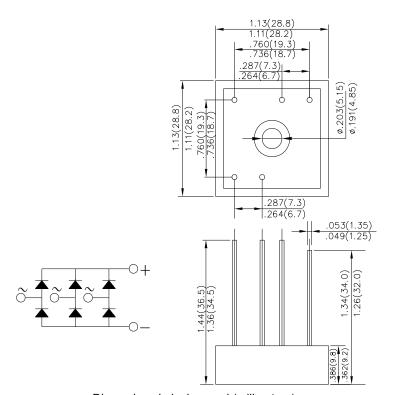

Dimensions in inches and (milimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

VOLTAGE RATINGS


CHARACTERISTICS	SYMBOL	-00	-01	-02	-04	-06	-08	-10	-12	-14	-16	UNIT
Peak Repetitive Voltage	VRRM											
Working Peak Reverse Voltage	VRWM	50	100	200	400	600	800	1000	1200	1400	1600	V
DC Blocking Voltage	VR											
Peak Non-Repetitive Reverse Voltage	Vrsm	75	150	275	500	725	900	1100	1300	1500	1700	V
RMS Reverse Voltage	VR(RMS)	35	70	140	280	420	560	700	840	980	1120	V
EODWADD CONDUCTION												

DC Operation per Bridge

I CIVITALE COLLEGE			
CHARACTERISTICS	SYMBOL	SBR35GW	UNIT
Maximum Average Forward	lo	35	Α
Rectified Current @TC=55°C	10	33	^
Peak Forward Surge Current t=8.3ms at 60HZ	IFSM	450	Α
I2t Rating for fusing	l ² t	840	$A^2 S$
Maximum Forward Voltage drop per element at 17.5A Peak	VF	1.1	V
Reverse peak current V _R =V _{RRM} @T _J =25℃	lr	5	μΑ
V _R =V _{RRM} @TJ=150℃	IK	3	mA
RMS Isolation Voltage from Case to Lead	Viso	2500	V
THERMAL CHARACTERISTICS			
Operating Temperature Range	TJ	-40 to +150	$^{\circ}$
Storage Temperature Range	Tstg	-40 to +125	$^{\circ}$
Thermal Resistance Junction to Case at	Rejc	0.9	°C/W
DO 0 11 D.1	LAUC	0.9	C/VV

REV. 1, 30-Apr-2014



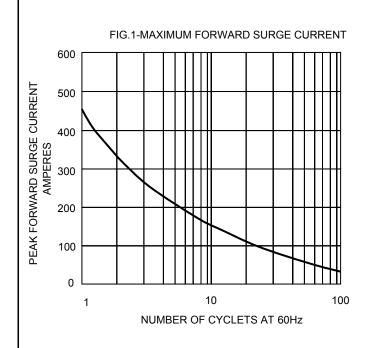

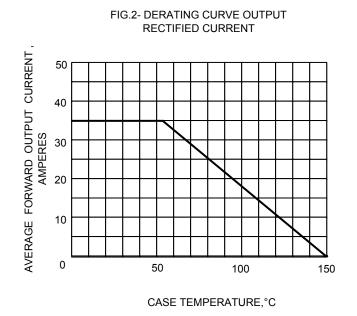


FIG.3-TYPICAL FORWARD CHARACTERISTICS


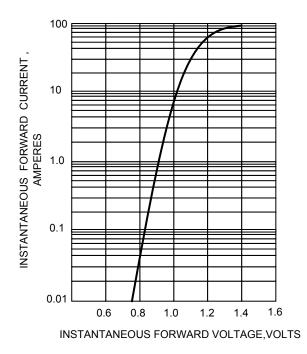


FIG.4-TYPICAL REVERSE CHARACTERISTICS

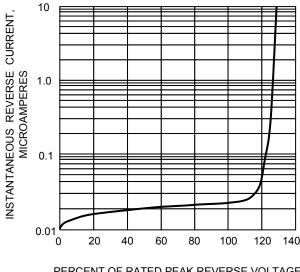

PERCENT OF RATED PEAK REVERSE VOLTAGE

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!