

SC35VBW SERIES

GLASS PASSIVATED 3 PHASE BRIDGE RECTIFIERS

REVERSE VOLTAGE - 800 to 1600 Volts FORWARD CURRENT - 35 Ampreres

FEATURES


- ●Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- ●Ideal for Printed Circuit Boards

MECHANICAL DATA

- ◆Case:Epoxy Case with Heat Sink Interally Mounted in the Bridge Encapsulation
- ●Terminals:Plated Leads Soiderable per MIL-STD-202,Method 208
- Polarity: As Marked on Body
- Weight:21 grams(approx.)
- Mounting Position:

Bolt Down on Heatsink With Silicone Thermal Compound Between Bridge and Mounting Surface for Maximum Heat Transfer Efficiency

●Mounting Torque:2 N · m

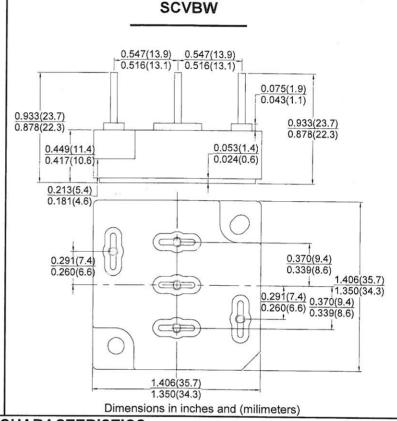

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

CHARACTERISTICS

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

SYMBOL

VOLTAGE RATINGS

0.11.01.01.00		NV968		100000			CIVII
Peak Repetitive Voltage	VRRM						
Working Peak Reverse Voltage	VRWM	800	1000	1200	1400	1600	l v
DC Blocking Voltage	VR						1
Peak Non-Repetitive Reverse Voltage	VRSM	900	1100	1300	1500	1700	V
RMS Reverse Voltage	VR(RMS)	560	700	840	980	1120	V
FORWARD CONDUCTION							
CHARACTERISTICS	SYMBOL	SC35VBW					UNIT
Maximum Average Forward	lo 35						А
Rectified Current @TC=55°C							
Peak Forward Surge Current t=8.3ms at 60HZ	İfsm	360					A
I2t Rating for fusing	l ² t	840					A ² S
Maximum Forward Voltage drop per element at 17.5A Peak	VF	1.1					V
Reverse peak current V _R =V _{RRM} @T _J =25℃	I _R	5					μА
V _R =V _{RRM} @TJ=150℃	IR	3					mA
RMS Isolation Voltage from Case to Lead	Viso	2500					V
THERMAL CHARACTERISTICS		MANY SECTION SECTIONS					
Operating Temperature Range	TJ	-40 to +150					°C
Storage Temperature Range	Tstg	-40 to +125					°C


-08

-10

-12

UNIT



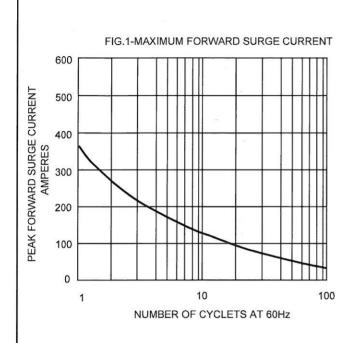

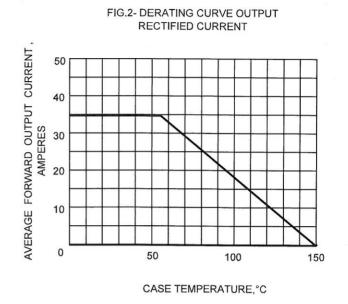


FIG.3-TYPICAL FORWARD CHARACTERISTICS


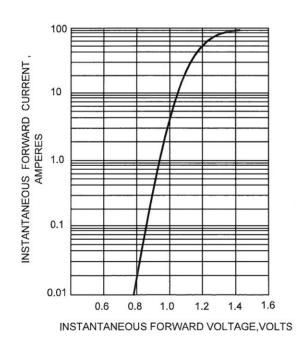


FIG.4-TYPICAL REVERSE CHARACTERISTICS

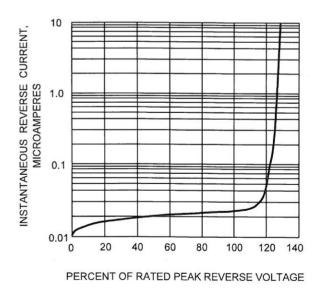

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!