

# JAMICON


(PE10AA4)

ELECTROLYTIC

CAPACITOR SPECIFICATION

CUSTOMER		ROPLA	
CODE	YOUR		NO. T0504039-6-2
	OUR	SKR332M1VKDBM	DATE 2005-04-25
LOT NO.			POLARITY
CASE SIZE		16 × 31,5	QUANTITY 0 PCS
SERIES	SKR	TYPE R	SAFETY VENT
RATED VALUE		3300 uF 35 v	

D	16 $\Phi$	L'	$\pm L+1.5$
D'	<D+0.5	F	7,5
d	0,8 $\Phi$		

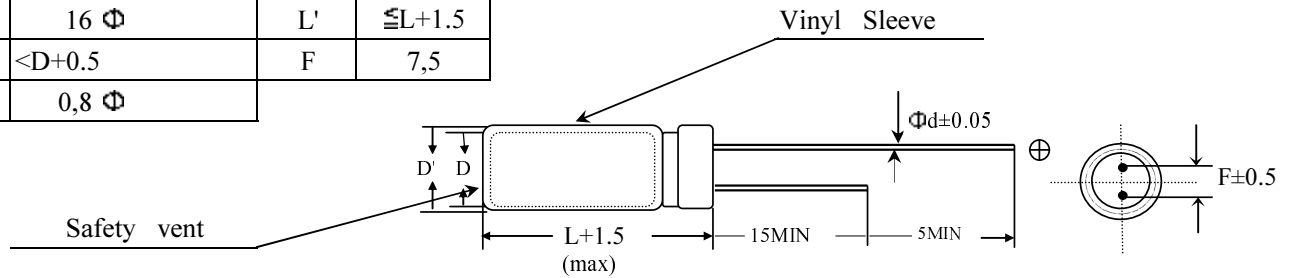

Item	Characteristics	
Operation temperature range	- 40 °C	~ + 85 °C
Capacitance Tolerance	- 20 %	~ + 20 %
Surge Voltage	44 VDC	
Leakage Current	$I_{\leq}$ 1155 (u A) Whichever is greater after 3 minutes	
Dissipation Factor	$\pm$ 16 (%)	120Hz 20 °C
E.S.R.	< ( $\Omega$ )	120Hz 20 °C
Ripple Current	< 2000 (m A)	120Hz 85 °C
IMP.	< ( $\Omega$ )	120Hz 20 °C
Low Temperature Stability	Impedance Ratio At 120Hz	
	Z-25°C / Z+20°C	2 MAX
	Z-40°C / Z+20°C	3 MAX
Load Test	After 2000 Hrs At 85 °C	
	Capacitance Change	$\pm$ 20 % of initial value
	D.F.(tan $\delta$ )	$\pm$ 150 % of initial specified value
	Leakage Current	$\pm$ initial specified value
	Out Look	Should be without any change
Terminal Strength	Pull Test	1,0 kg 10±1 sec
	Bend Test	0,5 kg 2 cycle
Soldering	245±3°C	Soldering must covered
	3±0.5sec	more than 95%
Storage Temperature	- 40 °C	~ + 85 °C

TEST FREQ.:120Hz	TEST TEMP:20°C	REFERENCE STANDARD: JIS C5102
------------------	----------------	-------------------------------

**SU ZHOU KAIMEI ELECTRONIC LTD.**

CHECKED

DESIGNED

課長  
05.04.25  
李平

技術部  
05.04.25  
徐燕霞