
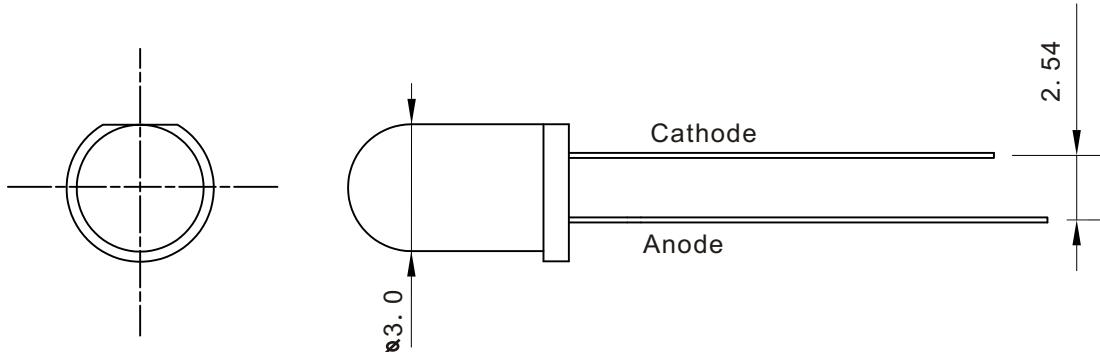


KTL030JCI

Features

- * 3.0mm x 5.3mm round LED lamp
- * Low power requirement
- * I.C. Compatible
- * Easy assembly
- * RoHs compliant
- * Wide viewing angle
- * Bicolour version available

Part No.	Chip		Lens
	Ram Material	Emitted colour	
	GIN/SIC	Green	

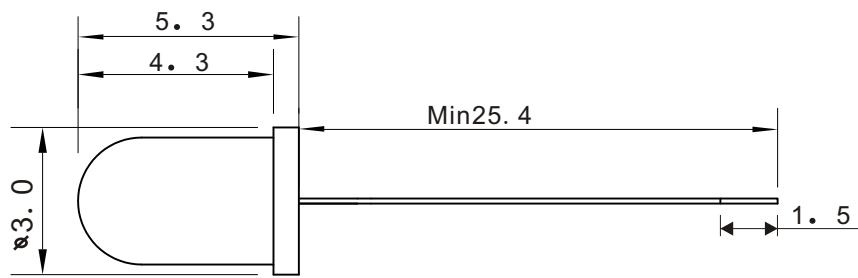

NOTES: 1. All dimensions are in millimeter(inches), tolerance is 0.25 unless otherwise noted.
2. Specifications are subject to change without notice.

Absolute Maximum Rating: (TA=25°C)

Parameter	Symbol	Maximum Rating	Unit
Peak Forward Current	IF _p	70	mA
Forward Current	IF	20	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	42	mW
Operating Temperature	Topr	-40~+85	°C
Storage Temperature	T _{stg}	-40~+85	°C
Electronstatic Discharge	ESD	500	V
Soldering Temperature		260°C for seconds	

Lead soldering Temperature (4mm from body) : 260°C for seconds

Optical-Electrical Characteristic: (TA=25°C)

Parameter	Symbol	Condition	Min	Type	Max	Unit
Forward Current	VF	IF=20mA	1. 7	—	2. 4	V
Reverse Current	IR	VR=5V		—	5	uA
Dominant Wavelength	λ _d	IF=20mA			572	nm
Peak Wavelength	λ _P	IF=20mA	567	569	572	nm
Luminous Intensity	I _v	IF=20mA	60	—	80	mcd
Viewing Angle	2θ _{1/2}	IF=20mA	—	35	—	Deg

Fig. 1

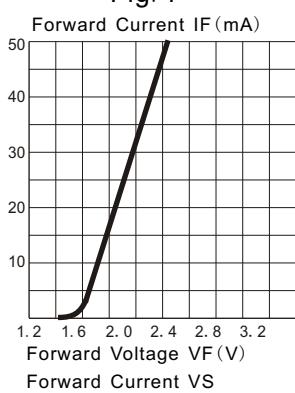
Forward Current VS
Forward Voltage .

Fig. 2





Relative Luminous Intensity
VS. Forward Current

Fig. 3

Forward Current IF (mA)
Ambient °C
Temperature Ta (°C)Fig. 4
Green

Relative Intensity vs. Wavelength

Fig. 5

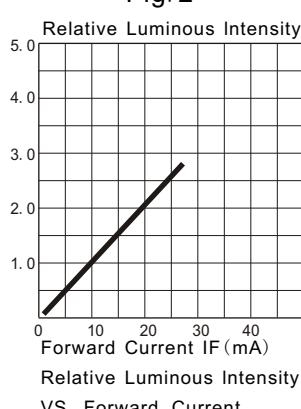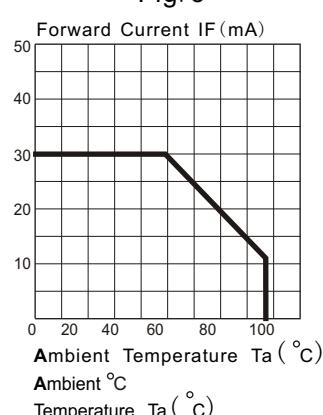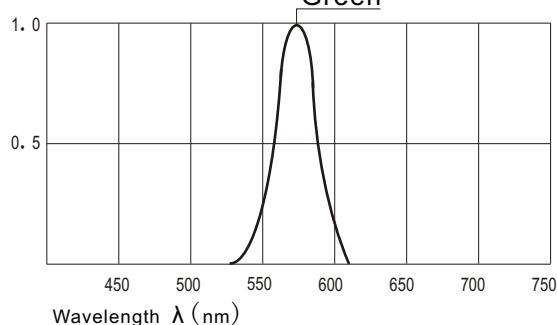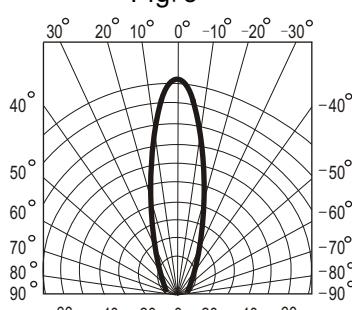

NOTES: 1. All dimensions are in millimeter(inches), tolerance is 0.25 unless otherwise noted.
 2. Specifications are subject to change without notice.