

# SPECIFICATION FOR APPROVAL

CUSTOMER	_____
CUST. PART NO.	_____
CUST. DOC. REV.	_____
DESCRIPTION	CHIP INDUCTORS(RoHS+H.F.)
SAMPLE LOT NO.	_____
PART NO.	FL201205L-XXXM-LRH
DOC. REV.	ORIG
DATE	_____

Once you approve this part, please sign and return this page to the following marked location.



Customer Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This part currently development section.  Production line can produce this series of products.

Sales Office-Headquarter  
 No. 566-1, Kao-Shi Rd., Yangmei, Taoyuan 32668, Taiwan  
 TEL: +886-3-475-3355  
 FAX: +886-3-485-4959

Yong Zhou Plant  
 Tao-Yuan Rd., Fenghuang Park, Lengshuitan District, Yongzhou, Hunan 425000, P.R.C.  
 TEL: +86-746-8610-180  
 FAX: +86-746-8610-181

Sales Office-Dong Guan,China  
 No.638,Mei Jing West Road Xiniupo Administrative Zone Dalang Town,Dong Guan City,GuangDong Province,China.  
 TEL: +86-769-8555-0979  
 FAX: +86-769-8555-0972

TESTED BY	CHECKED BY	APPROVED BY

# TABLE OF CONTENTS

INDEX	Page
■ Engineering Change Notice – Record .....	2
■ Part Number Identification .....	3
■ Mechanical Dimension .....	3
■ Rating Temperature .....	3
■ Test Instrument .....	3
■ Electrical Specification .....	3
■ Electrical Curve .....	4
■ Reliability Performance .....	5
■ Reflow Chart .....	6
■ Packing .....	7
■ Test Report .....	



# SPECIFICATION FOR APPROVAL

CUSTOMER	CUSTOMER P/N	REV. -	SPL. LOT NO.	
PART NAME <b>CHIP INDUCTORS (RoHS+H.F.)</b>	PART NO. <b>FL201205L-XXXM-LRH</b>	REV. <b>ORIG</b>	DATE OF ISSUE	Q'TY <b>0 PCS</b>

## ENGINEERING CHANGE NOTICE – RECORD

REVISION NO.	REVISION DESCRIPTION	AUTHOR	DATE	REMARK
<b>ORIG</b>		<i>Bruce Hsu</i>		




# SPECIFICATION FOR APPROVAL

※This is a RoHS and REACH compliant product whose related documents are available on request.


※Graphic is only for dimensionally application.

## 1. PART NUMBERING IDENTIFICATION

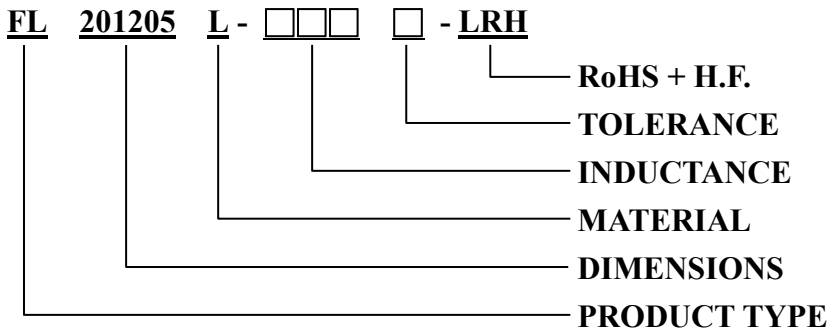

## 2. MECHANICAL DIMENSION

UNIT: mm

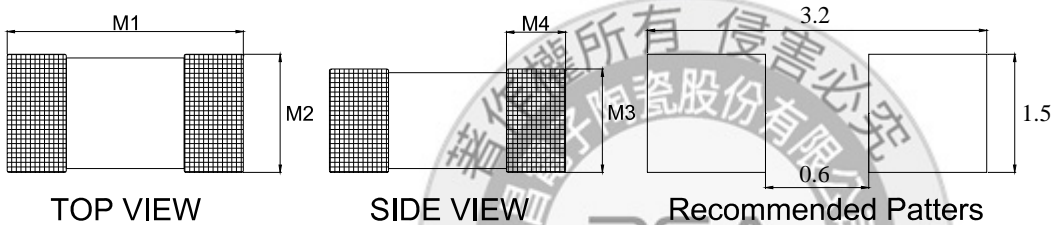

	DIM.	TOL.
M1	2.00	±0.15
M2	1.25	±0.15
M3	0.50	±0.05
M4	0.50	±0.20

## 3. RATING TEMPERATURE

OPERATING TEMPERATURE RANGE: - 40°C ~ +85°C

STORAGE CONDITION : LESS THAN 40°C AND 70% RH

STORAGE TIME: 12 MONTHS MAX.

## 4. TEST INSTRUMENT

4-1. HP4291B-RF Impedance / Material Analyzer

4-2. HP4338A/B Milliohm meter

4-3. OSC Level: 100mV

## 5. ELECTRICAL SPECIFICATION

Part number	Inductance (μH)	Test Frequency (MHz)	SRF (MHz) MIN.	DC Resistance (Ω) ±25%	Rated Current (mA)
FL201205L-R47M-LRH	0.47	1	100	0.120	1100
FL201205L-1R0M-LRH	1.00	1	90	0.190	800
FL201205L-1R5M-LRH	1.50	1	70	0.260	700
FL201205L-2R2M-LRH	2.20	1	40	0.330	600


NOTE:

Tolerance: M:±20%


# SPECIFICATION FOR APPROVAL

## 6. ELECTRICAL CURVE


### Inductance vs. Frequency

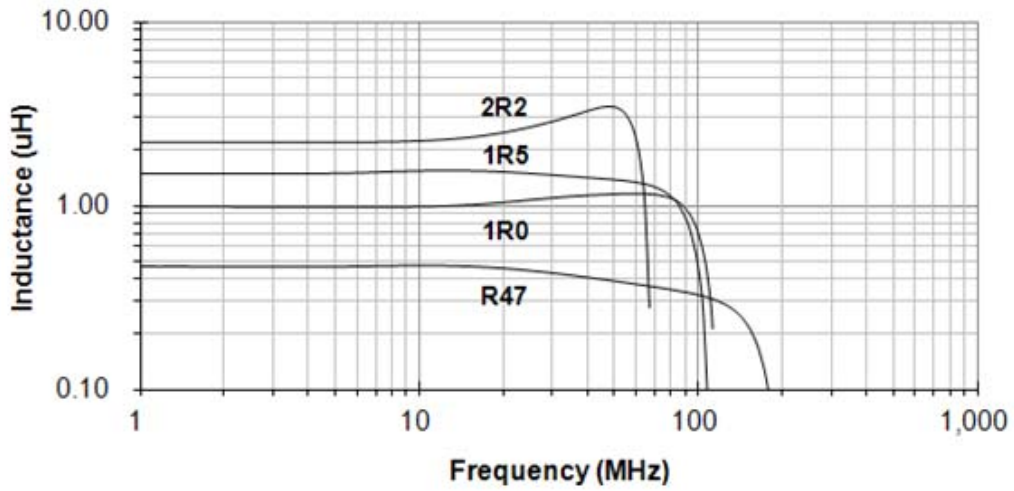

### Inductance vs. DC-bias

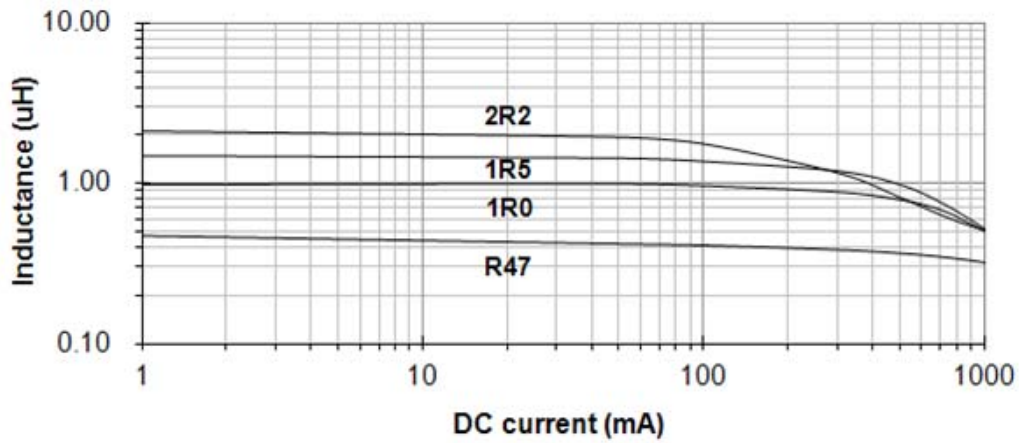

### Temperature rise vs. DC-bias

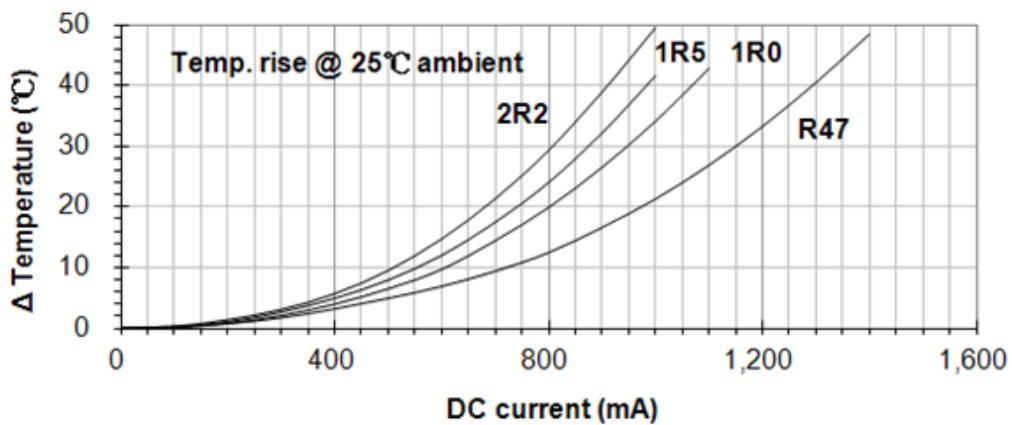


# SPECIFICATION FOR APPROVAL

## 7. RELIABILITY PERFORMANCE

Item	Test Condition	Requirements
Resistance to Solder Heat	<ol style="list-style-type: none"> <li>Solder temperature: 260±5°C</li> <li>Flux: Rosin</li> <li>DIP time: 10±1 sec</li> </ol>	<ol style="list-style-type: none"> <li>More than 95% of terminal electrode should be covered with new solder</li> <li>No mechanical damage</li> <li>Inductance value should be within ±20% of the initial value</li> </ol>
Solderability	<ol style="list-style-type: none"> <li>Solder temperature: 235±5°C</li> <li>Flux: Rosin</li> <li>DIP time: 5±1 sec</li> </ol>	<ol style="list-style-type: none"> <li>More than 95 % of terminal electrode should be covered with new solder</li> <li>No mechanical damage</li> </ol>
Adhesive Test	<ol style="list-style-type: none"> <li>Reflow temperature: 245°C It shall be Soldered on the substrate applying direction parallel to the substrate</li> <li>Apply force(F): 5 N</li> <li>Test time: 10 sec</li> </ol>	<ol style="list-style-type: none"> <li>No mechanical damage</li> <li>Soldering the products on PCB after the pulling test force &gt; 5 N</li> </ol>
Temperature Cycle	<ol style="list-style-type: none"> <li>Temperature:-40 ~ 85°C For 30 minutes each</li> <li>Cycle: 100 cycles</li> <li>Measurement: At ambient temperature 24 hours after test completion</li> </ol>	<ol style="list-style-type: none"> <li>No mechanical damage</li> <li>Inductance should be within ±20% of the initial value (Inductance: ≤0.47μH) Inductance should be within ±30% of the initial value (Inductance: &gt;0.47μH)</li> </ol>
High Temperature Resistance	<ol style="list-style-type: none"> <li>Temperature: 85±5°C</li> <li>Testing time: 1000 hrs</li> <li>Measurement: at ambient temperature 24 hours after test completion</li> </ol>	<ol style="list-style-type: none"> <li>No mechanical damage</li> <li>Inductance should be within ±20% of the initial value (Inductance: ≤0.47μH) Inductance should be within ±30% of the initial value (Inductance: &gt;0.47μH)</li> </ol>
Humidity	<ol style="list-style-type: none"> <li>Temperature: 40°C±2°C</li> <li>Humidity: 90-95 % RH</li> <li>Testing time: 1000 hrs</li> <li>Measurement: At ambient temperature 24 hours after test completion</li> </ol>	<ol style="list-style-type: none"> <li>No mechanical damage</li> <li>Inductance should be within ±20% of the initial value</li> </ol>
Rated Current	At ambient temperature & humidity Testing time:5 minutes (under full rated current)	Product surface temp: below room temperature plus 40°C

# SPECIFICATION FOR APPROVAL


## 8. TYPICAL RoHS REFLOW PROFILE

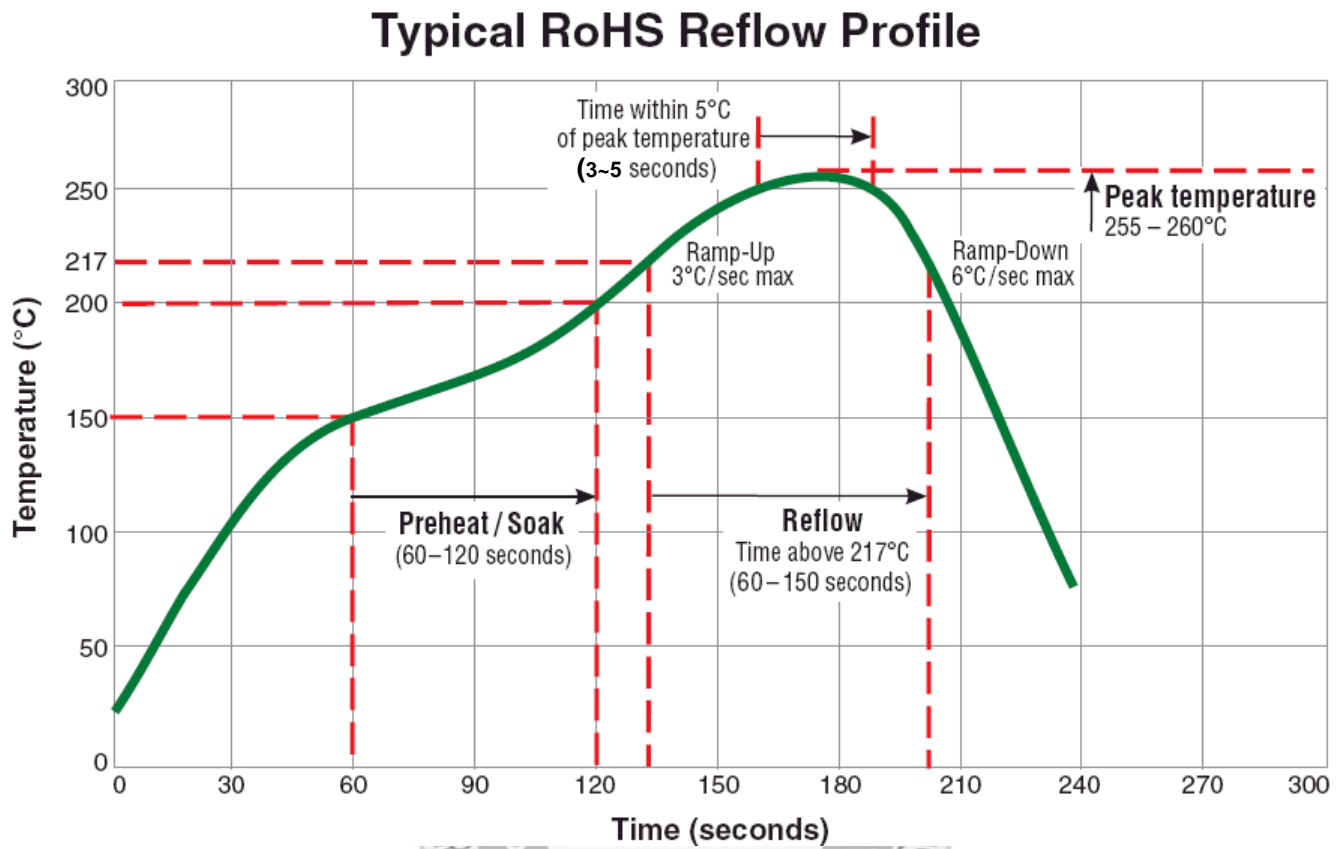

# SPECIFICATION FOR APPROVAL

## 9. PACKING


### 9-1. Plastic Carrier

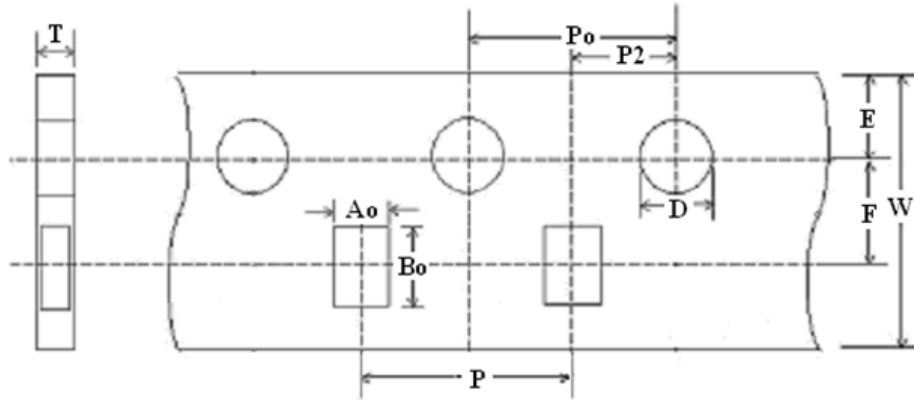

UNIT: mm

W	P	E	F	D	Po	P2	Ao	Bo	T
8.00±0.10	4.00±0.10	1.75±0.05	3.50±0.05	1.55±0.05	4.00±0.10	2.00±0.05	1.45±0.05	2.25±0.05	0.60±0.03

### 9-2. Reel Dimension (UNIT: mm)

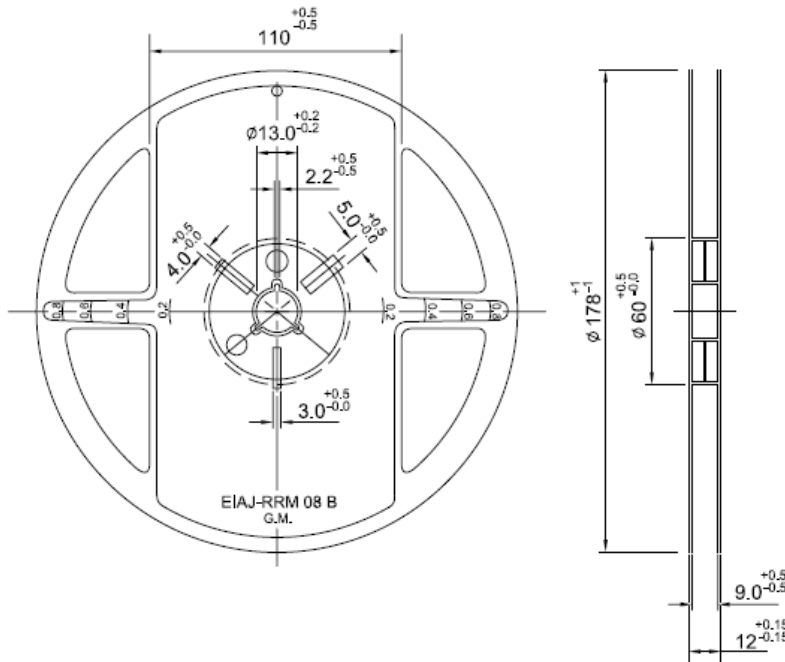

### 9-3. Packaging Quantity

Qty.	Inner Box
4000 Pcs	5 Reels