

SPECIFICATION FOR APPROVAL

CUSTOMER	_____
CUST. PART NO.	_____
CUST. DOC. REV.	_____
DESCRIPTION	MOLDING POWER CHOKE(RoHS+H.F.)
SAMPLE LOT NO.	_____
PART NO.	MCS1770-XXXXMCC
DOC. REV.	ORIG
DATE	_____

Once you approve this part, please sign and return this page to the following marked location.



Customer Signature: _____ Date: _____

This part currently development section. Production line can produce this series of products.

Sales Office-Headquarter
No. 566-1, Kao-Shi Rd., Yangmei, Taoyuan 32668,
Taiwan
TEL: +886-3-475-3355
FAX: +886-3-485-4959


Yong Zhou Plant
Tao-Yuan Rd., Fenghuang Park, Lengshuitan
District, Yongzhou, Hunan 425000, P.R.C.
TEL: +86-746-8610-180
FAX: +86-746-8610-181

Sales Office-Dong Guan,China
No.638,Mei Jing West Road Xiniupo Administrative
Zone Dalang Town,Dong Guan City,GuangDong
Province,China.
TEL: +86-769-8555-0979
FAX: +86-769-8555-0972

TESTED BY	CHECKED BY	APPROVED BY

TABLE OF CONTENTS

INDEX	Page
■ Engineering Change Notice - Record	2
■ Part Number Identification	3
■ Mechanical Dimension	3
■ Marking	3
■ Electrical Specification	4
■ Reflow Chart	5
■ Reliability Performance	6
■ Packing	7
■ Test Report	

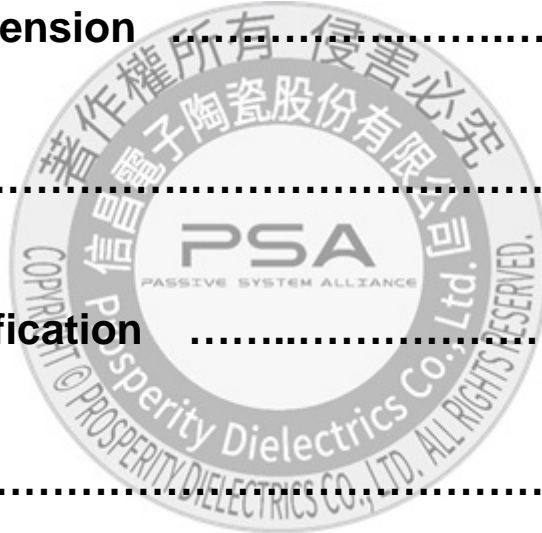

SPECIFICATION FOR APPROVAL

CUSTOMER	CUSTOMER P/N	REV. —	SPL. LOT NO.	
PART NAME MOLDING POWER CHOKE(RoHS+H.F.)	PART NO. MCS1770-XXXMCC	REV. ORIG	DATE OF ISSUE	Q'TY 0 PCS

ENGINEERING CHANGE NOTICE - RECORD


REVISION NO.	REVISION DESCRIPTION	AUTHOR	DATE	REMARK
ORIG		<i>Gary Chang</i>		




SPECIFICATION FOR APPROVAL

- ✘ This is a RoHS and REACH compliant product whose related documents are available on request.
- ✘ Graphic is only for dimensionally application.

1. PART NUMBERING IDENTIFICATION

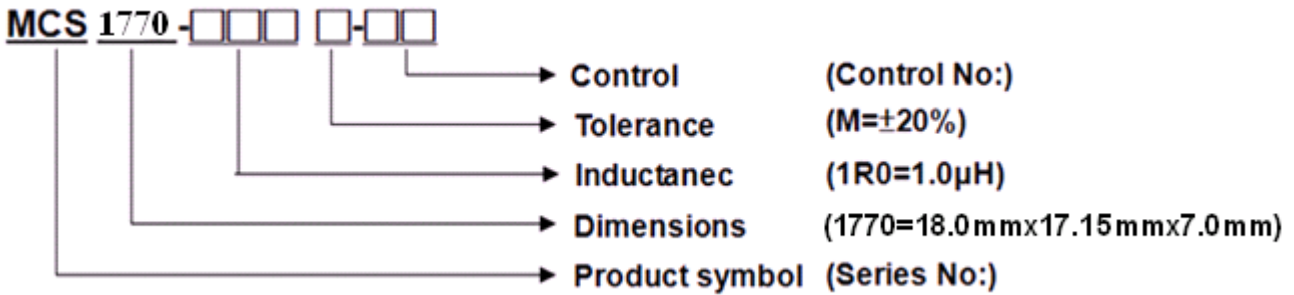

2. MECHANICAL DIMENSION

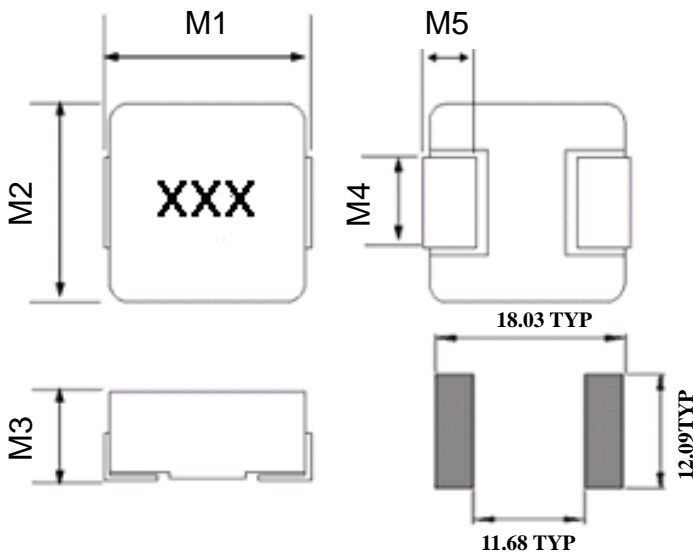


UNIT: mm

	DIM.	TOL.
M1	18.00	±0.3
M2	17.15	MAX.
M3	7.0	MAX.
M4	11.94	±0.3
M5	2.7	±0.4

3. MARKING

Marking ex:1.0uH → 1R0



SPECIFICATION FOR APPROVAL

4. ELECTRICAL SPECIFICATION

Part number	Inductance (uH) ±20%	DC Resistance (mΩ) Typical	DC Resistance (mΩ) MAX.	Rated Current (A) Typical	I sat (A) Typical
MCS1770-R82MCC	0.82	0.98	1.08	56.5	45.0
MCS1770-1R0MCC	1.00	1.21	1.27	55.5	32.0
MCS1770-1R5MCC	1.50	1.54	1.62	48.0	31.0
MCS1770-2R2MCC	2.20	1.85	1.98	43.5	28.0
MCS1770-3R3MCC	3.30	2.79	2.93	35.0	27.0
MCS1770-4R7MCC	4.70	3.98	4.18	30.0	21.0
MCS1770-5R6MCC	5.60	4.23	4.44	28.0	21.0
MCS1770-6R8MCC	6.80	5.86	6.15	22.5	18.5
MCS1770-8R2MCC	8.20	7.71	8.10	21.0	18.0
MCS1770-100MCC	10.0	8.89	9.33	19.0	17.0
MCS1770-150MCC	15.0	13.7	14.4	14.0	12.0
MCS1770-220MCC	22.0	20.0	21.0	12.0	9.50
MCS1770-330MCC	33.0	35.1	37.0	10.7	9.00
MCS1770-470MCC	47.0	40.7	42.7	8.70	8.60
MCS1770-560MCC	56.0	55.0	57.8	7.20	4.20
MCS1770-680MCC	68.0	72.1	75.7	6.10	4.50
MCS1770-820MCC	82.0	87.3	91.7	5.50	4.50
MCS1770-101MCC	100.0	105.0	110.0	5.00	4.00

TEST INSTRUMENT: CHROMA 16502 / Zentech1320+Zentech3305


NOTE:

1. Test Freq.: 100KHz, 1.0V
2. All test Data is referenced to 25°C ambient.
3. Typical Heat Rating DC Current would cause an approximately ΔT of 40°C.
4. Typical Saturation DC Current would cause Lo to drop approximately 30%.
5. Operation Temperature Range : -25°C~+125°C.
6. Storage Temperature Range: -20°C~+40°C (<60% R.H.).
7. The Part temperature (ambient +ΔT) should not exceed 125°C under worst case operating conditions.
8. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all effect the part temperature. Part temperature should be verified in the end application.
9. MSL: Level 1

SPECIFICATION FOR APPROVAL

5. TYPICAL RoHS REFLOW PROFILE

Typical RoHS Reflow Profile

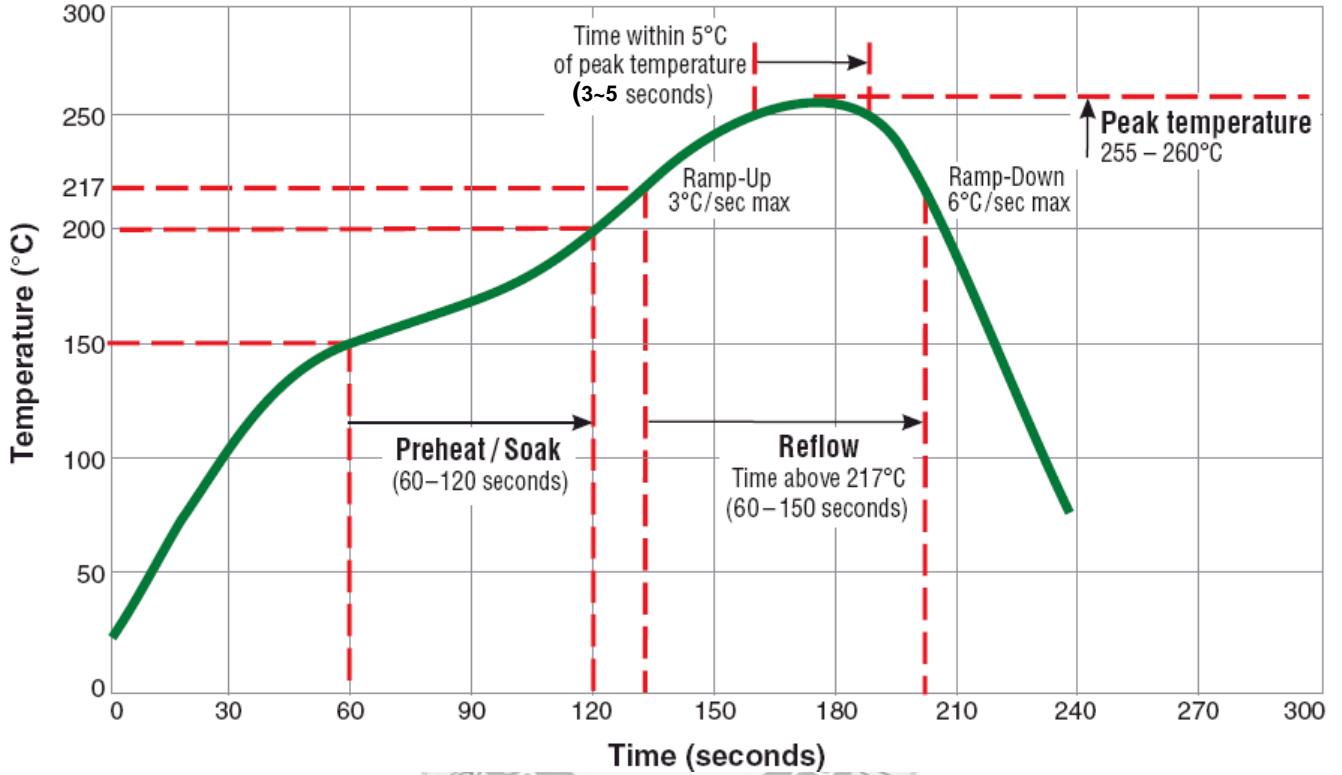

SPECIFICATION FOR APPROVAL

6. RELIABILITY PERFORMANCE

Reliability Experiment For Electrical


Test Item	Accept criteria	Test Condition	Standard Source
Humidity Test	1.Change from an initial value L:within±5% 2.no visible damage.	+40°C±2°C, humidity of 90%±5% (total 96 hours).	MIL-STD-202G Method 103B Test Condition B
High Temperature Test	1.Change from an initial value L:within±5% 2.no visible damage.	1.Temperature: +125°C±2°C. 2.Test time: 48±2hrs.	IEC 68-2 Test Condition B
Low Temperature Test	1.Change from an initial value L:within±5% 2.no visible damage.	1.Temperature: -25°C±2°C. 2.Test time: 48±2hrs.	IEC 68-2 Test Condition A
Thermal Shock	1.Change from an initial value L:within±5% 2.no visible damage.	+125°C±5°C (30 minutes) ~ -55±5°C (30 minutes), temperature switch time: 5 minutes (total 50 cycles) Wind speeds 10m/sec.	Reference MIL-STD-202G Method 107G Test Condition A-2
Life Test	1.Change from an initial value L:within±5% 2.no visible damage.	+70°C±5°C (250Hours).	Reference MIL-STD-202G Method 108A Test Condition B

Reliability Experiment For Physical

Test Item	Accept criteria	Test Condition	Standard Source
Vibration Test	1.Change from an initial value L:within±5% 2.no visible damage.	10-55-10HZ, amplitude: 1.5mm, direction: X, Y, Z axes, each axis 2 hours (total 6 hours).	MIL-STD-202G Method 201A
Solder Heat Resistance Test	1.no visible damage.	IR/convection reflow: Peak Temp 255°C ~260°C for 3~5 Sec. in air, Through 2 Cycle. Temperature Ramp:+1~4°C/sec.; Above 217°C, must keep 90 s - 120 s.	Reference MIL-STD-202G Method 210F Test Condition K (Reflow)
Solder Ability Test	1. Lead must have 95% above coverage.	Soak in 245°C solder pot of 3~5 Sec.	Reference J-STD-002D


SPECIFICATION FOR APPROVAL

7. PACKING

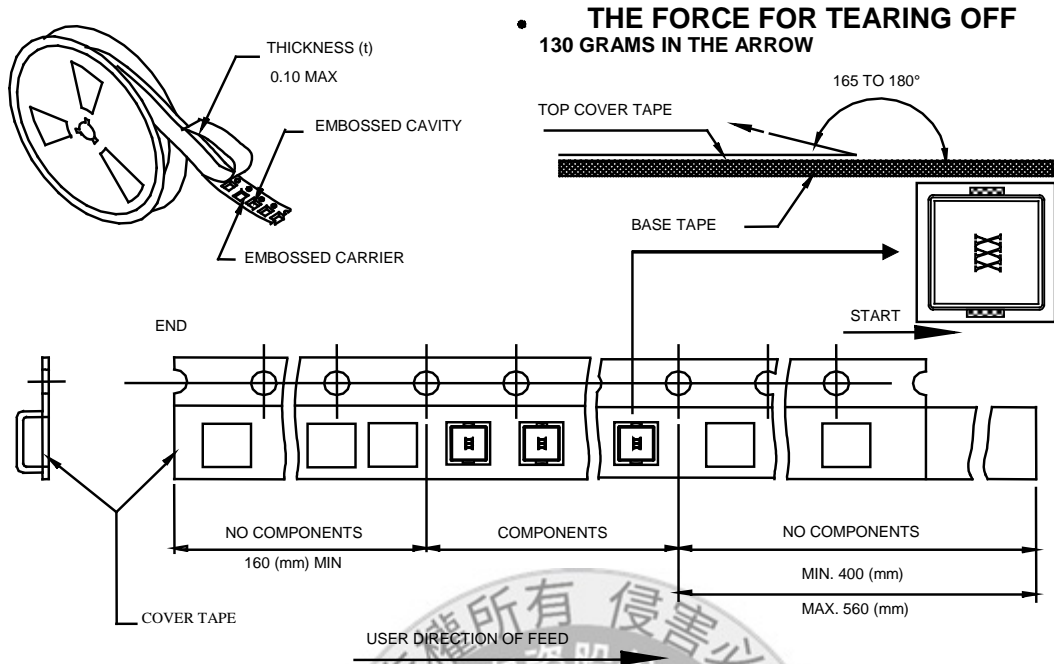


■ CARRIER TAPE REELS (mm)

MATERIAL: PLASTIC



150 Parts per Reel

■ DIMENSIONS OF CARRIER TAPE (mm)

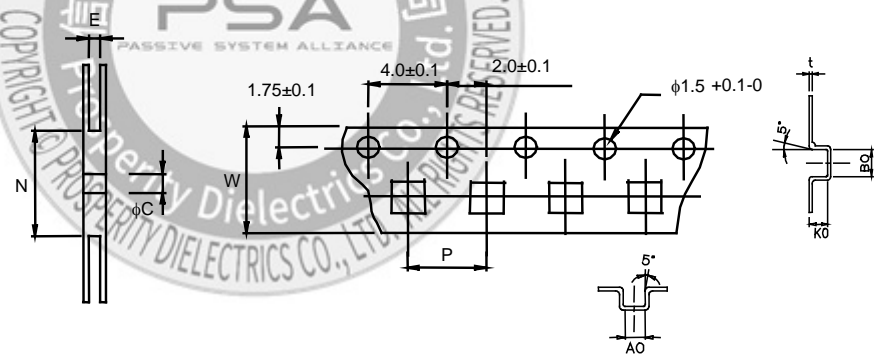

※ 10 sprocket hole pitch cumulative tolerance ± 0.20

UNIT: mm

	A	B	C	E	N	P	W	t	A0	B0	K0
DIM.	330	25	13	32.5	100	24	32	0.4	17.7	19.4	7.9
TOL.	± 0.2	± 0.5	± 0.5	± 0.5	MIN.	± 0.1	± 0.3	± 0.05	± 0.1	± 0.1	± 0.1