

LT6650Q

**ϕ26mm Waterproof Package
With Hood Type Full Color
Solid State Lamp**

■ Model No.

LT6650Q	Yellow-green	GaP
	Red(Super-luminosity)	GaAlAs/GaAlAs
	Blue	SiC

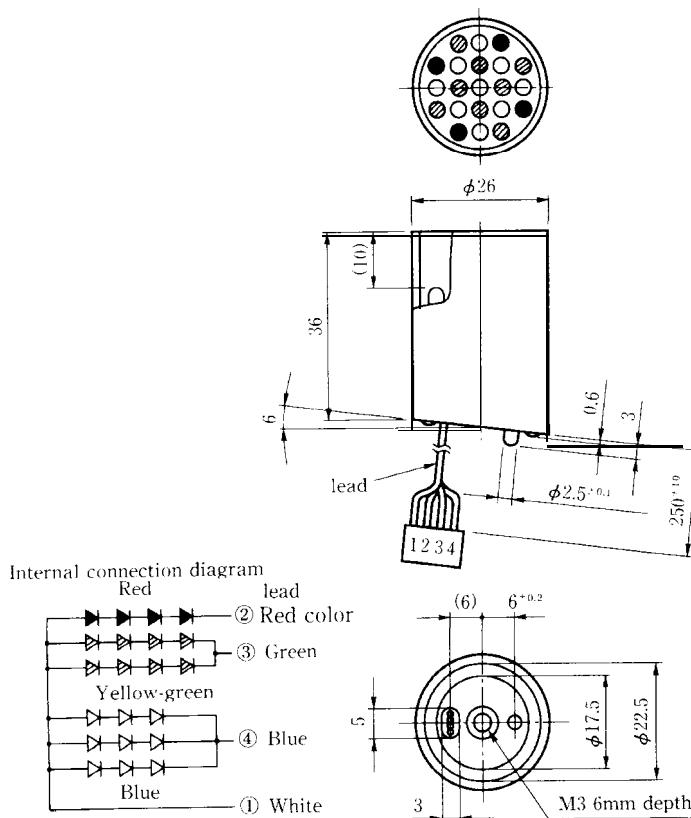
■ Features

1. $\phi 26\text{mm}$ full color solid state lamps
2. Radiation color : Yellow-green, red, blue, and mixed color
3. No. of built-in $\phi 3\text{mm}$ LED lamps
Yellow-green : 8pcs. Red : 4pcs. Blue : 9pcs.
4. Waterproof package with hood
5. Static drive
6. Wide viewing angle
7. Best suitable for outdoor and indoor information boards

3

■ Outline Dimensions

(Unit : mm)



S H A R P

"In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that occur in equipment using any of SHARP's devices, shown in catalogs, databooks, etc. Contact SHARP in order to obtain the latest version of the device specification sheets before using any SHARP's device."

LT6650Q**■ Absolute Maximum Ratings**

(Ta = 25°C)

Parameter	Symbol	LT6650Q			Unit
		Yellow-green	Red	Blue	
Power dissipation	P	0.6	0.25	0.9	W
Continuous forward current	I _F	60	30	90	mA
Peak forward current	I _{FM}	—	—	—	mA
Derating factor	DC	—	—	—	nA/°C
	Pulse	—	—	—	nA/°C
Reverse voltage	V _R	12			V
Operating temperature	T _{opr}	-25 to +60			°C
Storage temperature	T _{stg}	-30 to + 100			°C
Soldering temperature	T ₃₀₁				°C

LT6650Q(Yellow-green/Red/Blue)

■ Electro-optical Characteristics

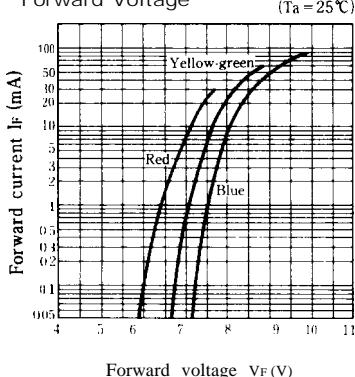
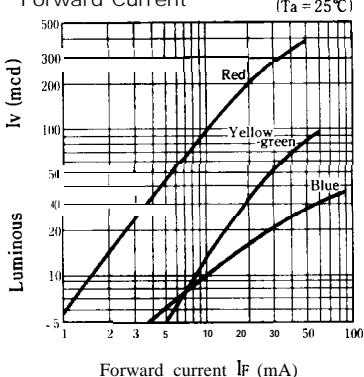
(Ta = 25°C)

Parameter	Symbol	Radiation color	Conditions	MIN.	TYP.	MAX.	Unit
Forward voltage	V _F	Yellow-green	I _F = 40mA	—	8.5	9.2	V
		Red	I _F = 20mA	—	7.3	8.0	
		Blue	I _F = 60mA	—	9.2	10.0	
*'Luminous intensity	I _V	Yellow-green	I _F = 40mA	500	700	—	mcd
		Red	I _F = 20mA	1000	2000	—	
		Blue	I _F = 60mA	15	30	—	
Peak emission wavelength	λ_p	Yellow-green	I _F = 40mA	—	565	—	nm
		Red	I _F = 20mA	—	660	—	
		Blue	I _F = 60mA	—	470	—	
Spectrum radiation bandwidth	$\Delta\lambda$	Yellow-green	I _F = 40mA	—	30	—	nm
		Red	I _F = 20mA	—	20	—	
		Blue	I _F = 60mA	—	70	—	
Reverse current	I _R	Yellow-green	V _R = 12V	—	—	100-	μ A
		Red	V _R = 12V	—	—	100	
		Blue	V _R = 12V	—	—	—	

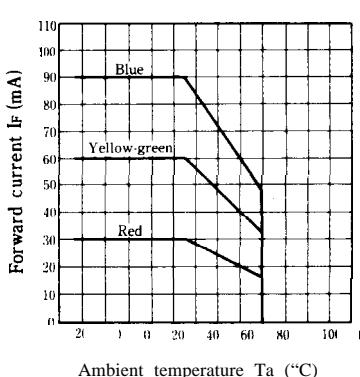
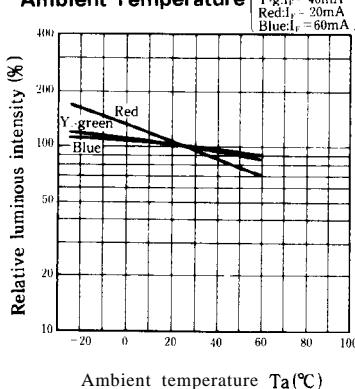
※1 Tolerance : $\pm 20\%$

3

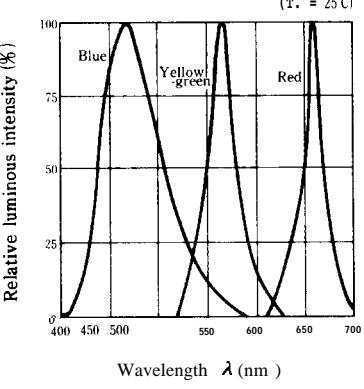
■ Characteristics Diagrams

Forward Current vs.
Forward VoltageLuminous Intensity vs.
Forward Current

Forward Current Derating Curve

Relative Luminous Intensity vs.
Ambient Temperature

Spectrum Distribution



Radiation Diagram

