ROPLA 2018.10.16

ALUMINUM ELECTROLYTIC CAPACITORS


APPROVAL NO.

9444

NBC 400 VB 2.2 (M)

	SERIES	NBC				
ĺ	RATING	400 V 2.2 μF				
I	CASE SIZE	Ø 10 × 12.5 L				


A. DIAGRAM OF DIMENSION

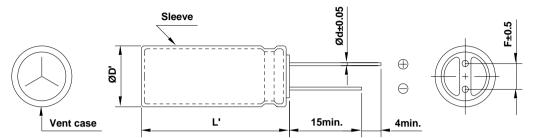

•	•
ØD	10
L	12.5
Ød	0.6
F	5.0
ØD'	ØD+0.5 max.
L'	L+2.0 max.

[Unit: mm]

B. MARKING: DARK BLUE SLEEVE & SILVER INK



FRONT VIEW OF CAPACITOR

BACK VIEW OF CAPACITOR

(at 120Hz)

C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE : $-40 \sim +105 \,^{\circ}$ C B. RATED VOLTAGE : $400 \,^{\circ}$ V_{DC} C. SURGE VOLTAGE : $450 \,^{\circ}$ V_{DC}

D. CAPACITANCE TOLERANCE : ±20% at 20℃, 1201z

F. DISSIPATION FACTOR (TAN δ) : Lower <u>0.24</u> at 20 °C, 120 Hz G. RATED RIPPLE CURRENT : <u>45 mArms</u> at 105 °C, 120 Hz

H. RATED RIPPLE CURRENT MULTIPLIERS

(Frequency Multipliers)

Freq.(Hz)	120	1k	10k	50k	100k
Factor	1.00	1.75	2.25	2.35	2.50

I. TEMPERATURE CHARACTERISTIC

(Max. Impedance ratio)

racioi	1.00		.73	2.4	
Z(-25℃)	Z(20 ℃	;)	3		
Z(-40℃)	Z(20°C	;)	6		

after the rated voltage with the rated ripple current is applied

(the peak voltage shall not exceed the rated voltage) for 10,000 hours at 105℃.

Capacitance change $\leq \pm 20 \%$ of the initial value

Tan δ $\leq 200 \%$ of the initial specified value

Leakage Current ≤ The initial specified value

K. SHELF LIFE: The following specifications shall be satisfied when the capacitors are restored to 20 °C

after exposing them for 1,000 hours at 105°C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes,

at least 24 hours and not more than 48 hours before the measurements.

Capacitance change $\leq \pm 20 \%$ of the initial value

Tanδ ≤ 200 % of the initial specified value # Leakage Current ≤ 500 % of the initial specified value

L. CLEANING CONDITIONS: Non-solvent proof

M. OTHERS : Satisfied charateristics KS C IEC 60384-4

