

ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

7837

NBC 400 VB 6.8 (M)

SERIES

NBC


RATING

400 V 6.8 μ F

CASE SIZE

 \varnothing 10 x 12.5 L


A. DIAGRAM OF DIMENSION

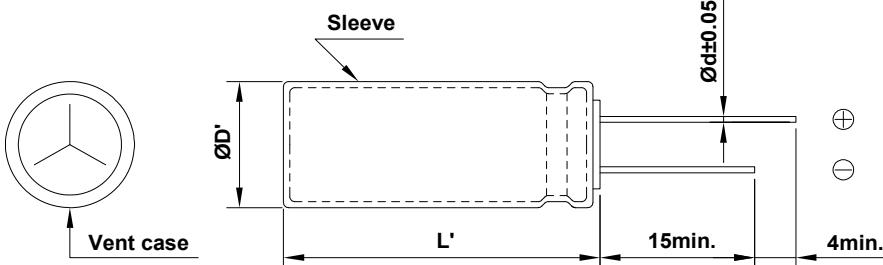

[Unit : mm]

$\varnothing D$	10
L	12.5
$\varnothing d$	0.6
F	5.0
$\varnothing D'$	$\varnothing D+0.5$ max.
L'	$L+2.0$ max.

B. MARKING : DARK BLUE SLEEVE & SILVER INK

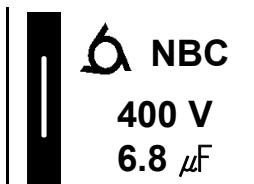

FRONT VIEW OF CAPACITOR



BACK VIEW OF CAPACITOR

C. ELECTRICAL CHARACTERISTICS

A. OPERATING TEMPERATURE RANGE

: -40 ~ +105°C

B. RATED VOLTAGE

: 400 V_{DC}

C. SURGE VOLTAGE

: 450 V_{DC}

D. CAPACITANCE TOLERANCE

: ± 20% at 20°C, 120Hz

E. LEAKAGE CURRENT

: Lower 208.8 μ A, after 1 minute at 20°C

F. DISSIPATION FACTOR (TANδ)

: Lower 0.24 at 20°C, 120Hz

G. RATED RIPPLE CURRENT

: 99 mArms at 105°C, 120Hz

H. TEMPERATURE CHARACTERISTIC

:

(Max. Impedance ratio)

Z(-25°C) / Z(20°C) | 3

Z(-40°C) / Z(20°C) | 6

(at 120Hz)

I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 10,000 hours at 105°C.

Capacitance change ≤ ±20 % of the initial value

Tanδ ≤ 200 % of the initial specified value

Leakage Current ≤ The initial specified value

J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.


Capacitance change ≤ ±20 % of the initial value

Tanδ ≤ 200 % of the initial specified value

Leakage Current ≤ 500 % of the initial specified value

K. CLEANING CONDITIONS : Non-solvent proof

L. OTHERS : Satisfied characteristics KS C IEC 60384-4

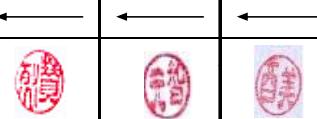

SamYoung Electronics Co., Ltd.