

ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

6614

NBC 450 VB 22 (M)

SERIES

NBC

RATING


450 V 22 μ F

CASE SIZE

 \varnothing 10 x 33 L

A. DIAGRAM OF DIMENSION

[Unit : mm]

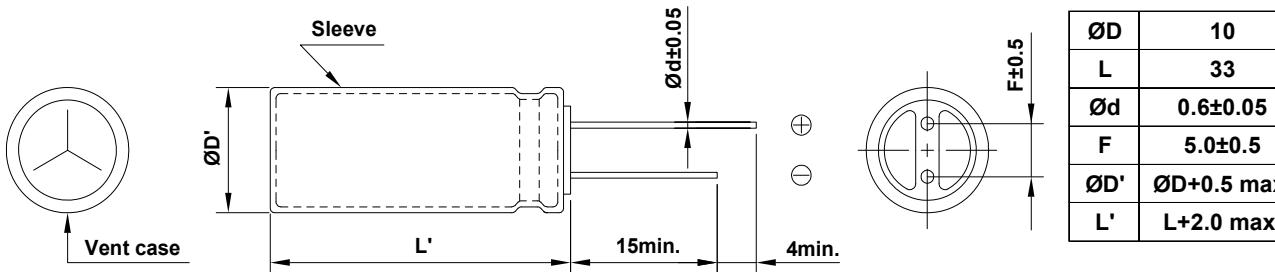

B. MARKING : DARK BLUE SLEEVE & SILVER INK



FRONT VIEW OF CAPACITOR



BACK VIEW OF CAPACITOR

C. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : -40 ~ +105°C
- B. RATED VOLTAGE : 450 V_{DC}
- C. SURGE VOLTAGE : 500 V_{DC}
- D. CAPACITANCE TOLERANCE : ±20% at 20°C, 120Hz
- E. LEAKAGE CURRENT : Lower 496 μ A, after 1 minute at 20°C
- F. DISSIPATION FACTOR (TANδ) : Lower 0.24 at 20°C, 120Hz
- G. MAX. RIPPLE CURRENT : 240 mArms at 105°C, 120Hz
- H. TEMPERATURE CHARACTERISTIC :
(Max. Impedance ratio)
 $Z(-25°C) / Z(20°C) = 3$
 $Z(-40°C) / Z(20°C) = 6$ (at 120Hz)

I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied

(the peak voltage shall not exceed the rated voltage) for 10,000 hours at 105°C.

Capacitance change \leq ±20 % of the initial value

Tanδ \leq 200 % of the initial specified value

Leakage Current \leq The initial specified value

J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.

The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.

Capacitance change \leq ±20 % of the initial value

Tanδ \leq 200 % of the initial specified value

Leakage Current \leq 500 % of the initial specified value

K. CLEANING CONDITIONS : Non-solvent proof

L. OTHERS : Satisfied characteristics KS C IEC 60384-4



SamYoung Electronics Co., Ltd.