

# ALUMINUM ELECTROLYTIC CAPACITORS

APPROVAL NO.

1529

**NFL 400 VB 6.8 (M)**

SERIES

NFL

RATING


400 WV 6.8  $\mu$ F

CASE SIZE

$\varnothing$ 10 x 16L



## A. DIAGRAM OF DIMENSION

[Unit : mm]

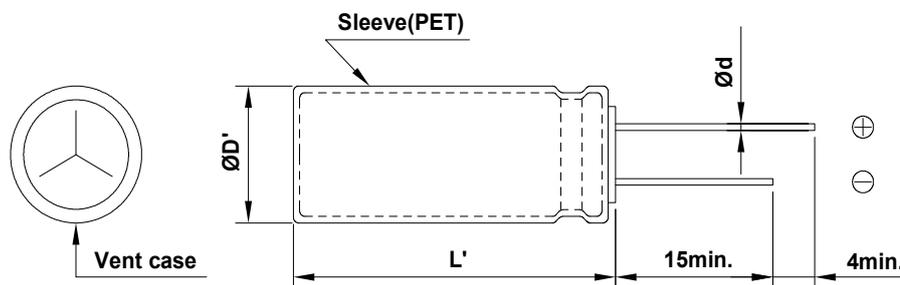

$\varnothing D$	10
L	16
$\varnothing d$	0.6
F	5.0
$\varnothing D'$	$\varnothing D + 0.5$ max.
$L'$	$L + 2.0$ max.

## B. MARKING : DARK BROWN SLEEVE & SILVER INK

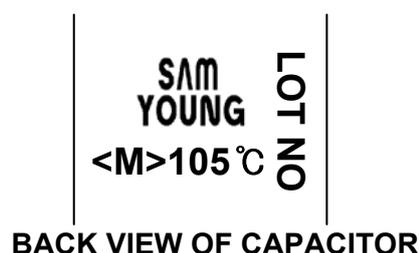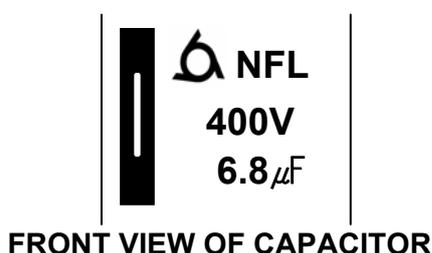

## C. ELECTRICAL CHARACTERISTICS

- A. OPERATING TEMPERATURE RANGE : -40 ~ +105°C
- B. RATED VOLTAGE : 400 V<sub>DC</sub>
- C. SURGE VOLTAGE : 450 V<sub>DC</sub>
- D. CAPACITANCE TOLERANCE : ±20% at 20°C , 120Hz
- E. LEAKAGE CURRENT : Lower 208.8  $\mu$ A , after 1 minutes at 20°C
- F. DISSIPATION FACTOR (TAN $\delta$ ) : Lower 0.24 at 20°C , 120Hz
- G. MAX. RIPPLE CURRENT : 82 mArms at 105°C , 120Hz
- H. TEMPERATURE CHARACTERISTIC :  
 (Max.Impedance ratio)  $Z(-25^\circ\text{C}) / Z(20^\circ\text{C}) = \underline{5}$   
 $Z(-40^\circ\text{C}) / Z(20^\circ\text{C}) = \underline{6}$  (at 120Hz)
- I. LOAD LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied at 105°C for 10,000 hours.
  - # Capacitance change  $\leq$  ±20 % of the initial value
  - # Tan $\delta$   $\leq$  200 % of the initial specified value
  - # Leakage Current  $\leq$  The initial specified value
- J. SHELF LIFE : The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.
  - # Capacitance change  $\leq$  ±20 % of the initial value
  - # Tan $\delta$   $\leq$  200 % of the initial specified value
  - # Leakage Current  $\leq$  500 % of the initial specified value
- K. CLEANING CONDITIONS : Non-solvent proof
- L. OTHERS : Satisfied characteristics W of KS C 6421

