

## HIGH EFFICIENCY ULTRAFAST DIODE

### MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	<b>2 x 30 A</b>
$V_{RRM}$	<b>200 V</b>
$T_j$ (max)	<b>175 °C</b>
$V_F$ (typ)	<b>0.75 V</b>
$t_{rr}$ (typ)	<b>22 ns</b>


### FEATURES AND BENEFITS

- Suited for SMPS
- Low losses
- Low forward and reverse recovery times
- High surge current capability
- High junction temperature
- Low leakage current

### DESCRIPTION

Dual center tap rectifier suited for Switch Mode Power Supplies and High frequency DC to DC converters.

Packaged in TO-247, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

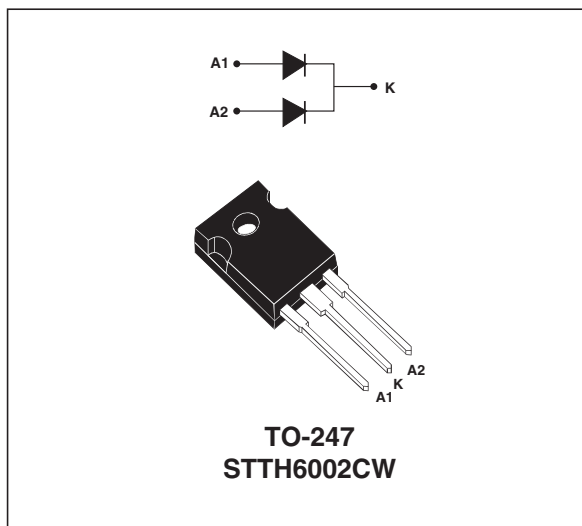

### ABSOLUTE RATINGS (limiting values, per diode)

Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage		200	V
$I_{F(RMS)}$	RMS forward current		50	A
$I_{F(AV)}$	Average forward current $\delta = 0.5$	$T_c = 140^\circ\text{C}$ Per diode	30	A
		$T_c = 125^\circ\text{C}$ Per device	60	
$I_{FSM}$	Surge non repetitive forward current	$t_p = 10$ ms Sinusoidal	330	A
$T_{stg}$	Storage temperature range		- 65 + 175	°C
$T_j$	Maximum operating junction temperature		175	°C

## STTH6002C

### THERMAL PARAMETERS

Symbol	Parameter		Maximum	Unit
R <sub>th(j-c)</sub>	Junction to case	Per diode	1.2	°C/W
		Per device	0.8	
R <sub>th(j-c)</sub>	Coupling		0.4	°C/W

When the diodes 1 and 2 are used simultaneously:

$$\Delta T_j (\text{diode1}) = P(\text{diode1}) \times R_{th(j-c)} (\text{per diode}) + P(\text{diode2}) \times R_{th(c)}$$

### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
I <sub>R</sub> *	Reverse leakage current	T <sub>j</sub> = 25°C	V <sub>R</sub> = V <sub>RRM</sub>			30	μA
		T <sub>j</sub> = 125°C			30	300	
V <sub>F</sub> **	Forward voltage drop	T <sub>j</sub> = 25°C	I <sub>F</sub> = 30 A			1.05	V
		T <sub>j</sub> = 25°C	I <sub>F</sub> = 60 A			1.18	
		T <sub>j</sub> = 150°C	I <sub>F</sub> = 30 A		0.75	0.84	
		T <sub>j</sub> = 150°C	I <sub>F</sub> = 60 A			0.99	

Pulse test: \* tp = 5ms, δ < 2%

\*\* tp = 380μs, δ < 2%


To evaluate the maximum conduction losses use the following equation :

$$P = 0.69 \times I_{F(AV)} + 0.005 I_{F(RMS)}^2$$


### DYNAMIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
t <sub>rr</sub>	Reverse recovery time	T <sub>j</sub> = 25°C	I <sub>F</sub> = 1 A V <sub>R</sub> = 30V dI <sub>F</sub> /dt = 200 A/μs		22	27	ns
I <sub>RM</sub>	Reverse recovery current	T <sub>j</sub> = 125°C	I <sub>F</sub> = 30 A V <sub>R</sub> = 160V dI <sub>F</sub> /dt = 200 A/μs		6.3	8.2	A
t <sub>fr</sub>	Forward recovery time	T <sub>j</sub> = 25°C	I <sub>F</sub> = 30 A dI <sub>F</sub> /dt = 200 A/μs V <sub>FR</sub> = 1.1 x V <sub>Fmax</sub>			220	ns
V <sub>FP</sub>	Forward recovery voltage	T <sub>j</sub> = 25°C	I <sub>F</sub> = 30 A dI <sub>F</sub> /dt = 200 A/μs		2.5		V


**Fig. 1:** Peak current versus duty cycle (per diode).

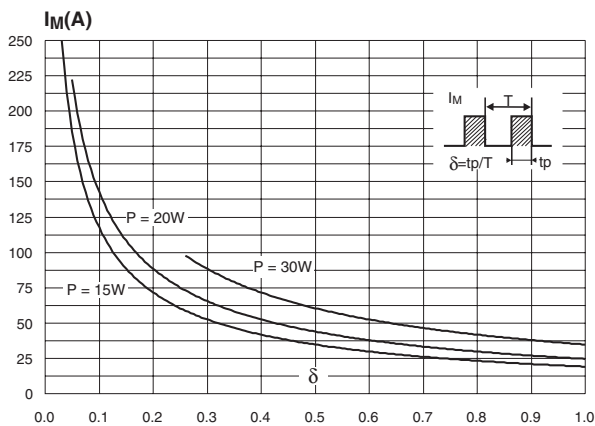


**Fig. 2-1:** Forward voltage drop versus forward current (typical values, per diode).

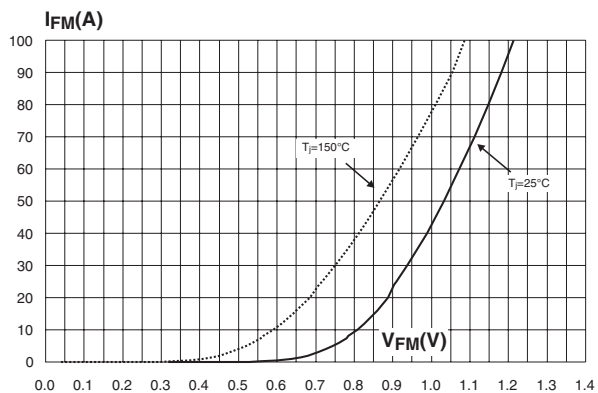


**Fig. 2-2:** Forward voltage drop versus forward current (maximum values, per diode).

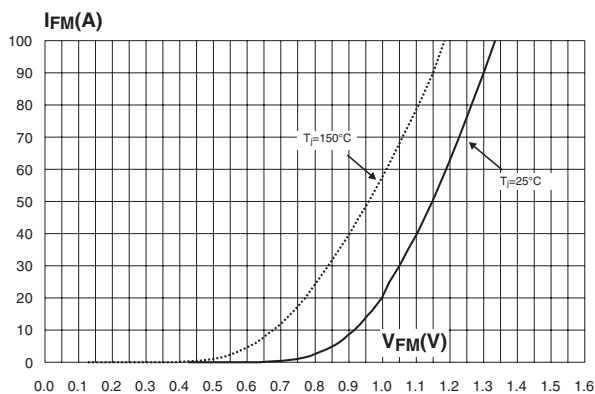


**Fig. 3:** Relative variation of thermal impedance junction to case versus pulse duration.

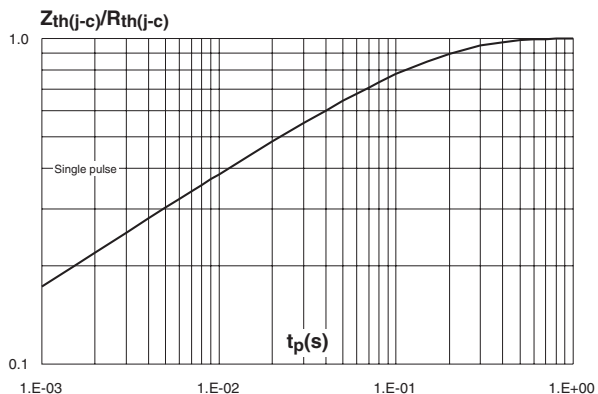


**Fig. 4:** Junction capacitance versus reverse voltage applied (typical values, per diode).

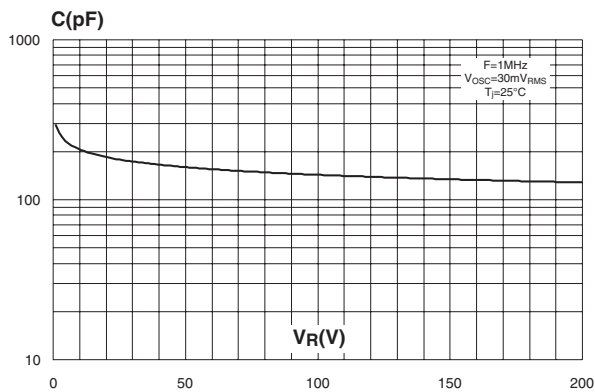


**Fig. 5:** Reverse recovery charges versus  $di_F/dt$  (typical values, per diode).

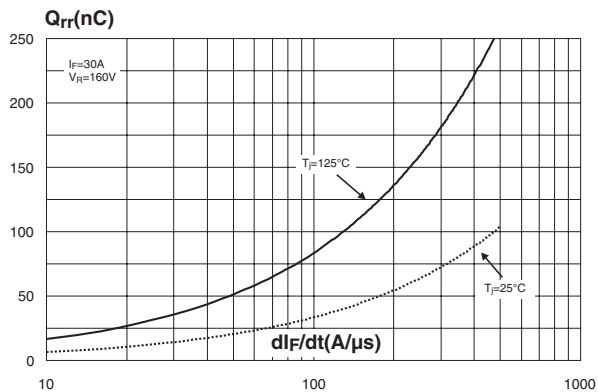


**Fig. 6:** Reverse recovery time versus  $di_F/dt$  (typical values, per diode).

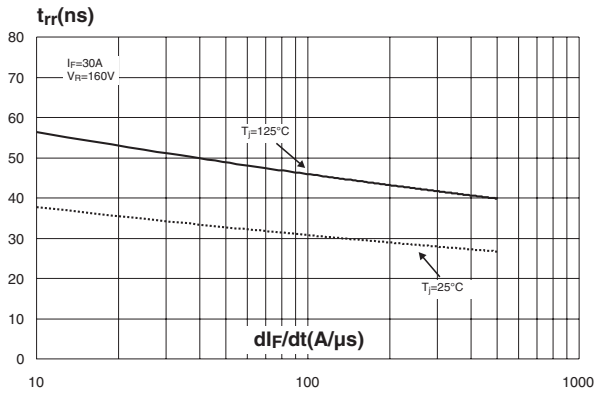


**Fig. 7:** Peak reverse recovery current versus  $di_F/dt$  (typical values, per diode).

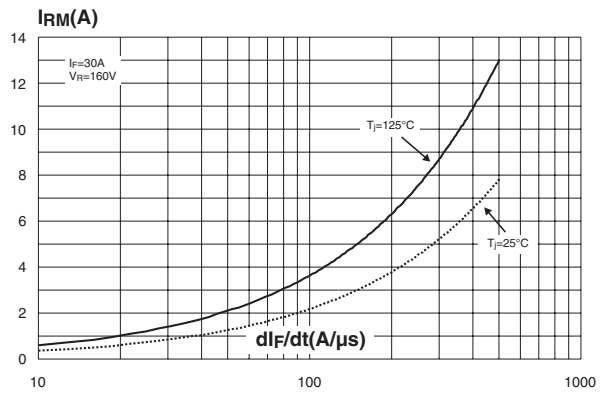

**Fig. 8:** Dynamic parameters versus junction temperature.

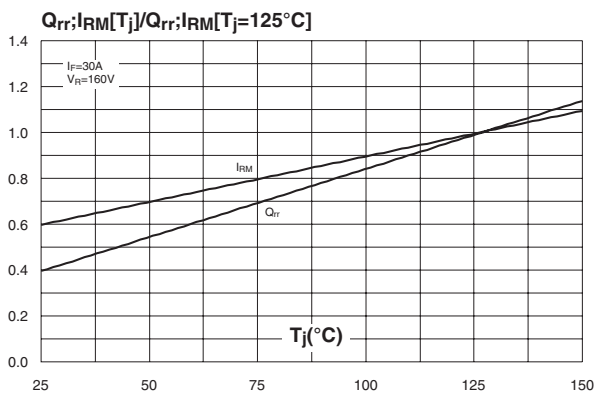

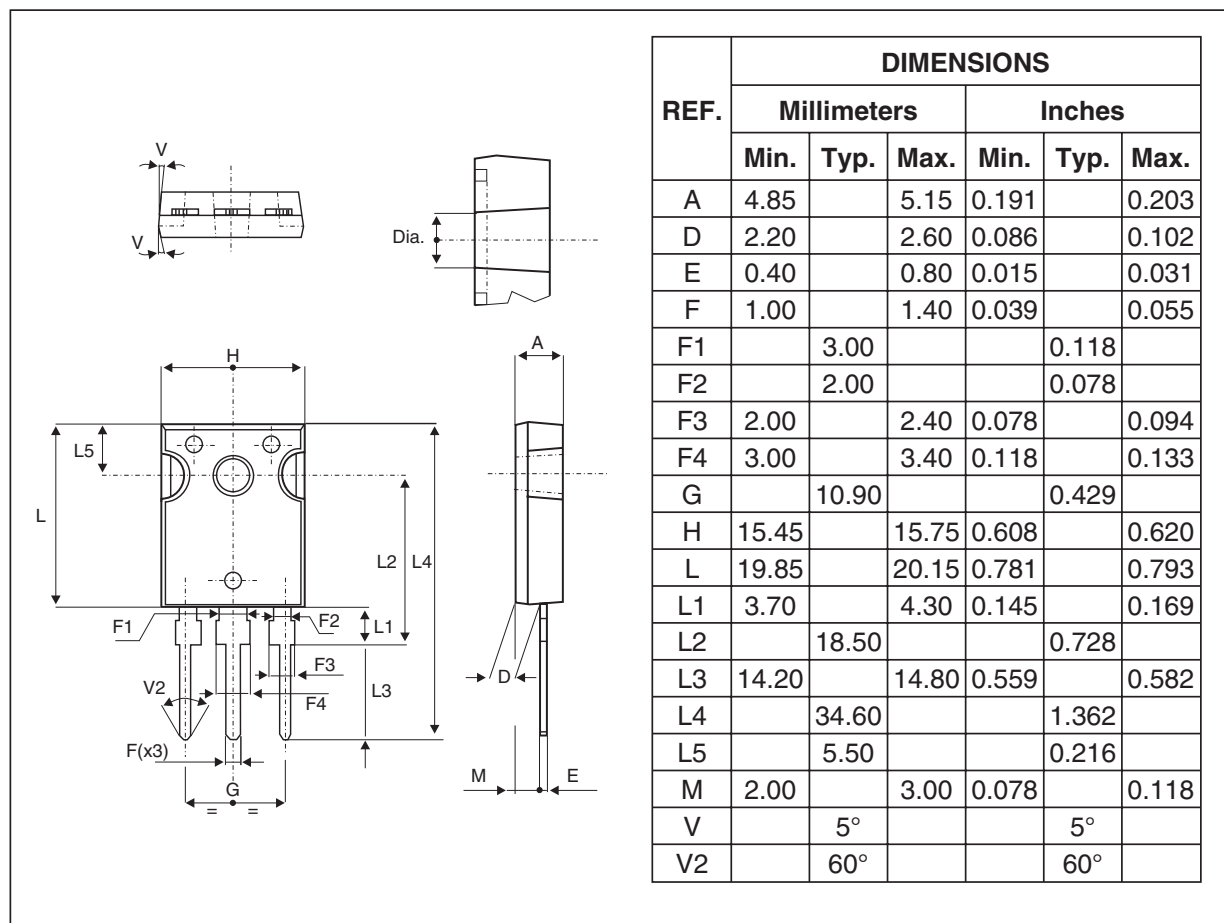**PACKAGE MECHANICAL DATA**  
 TO-247


Ordering code	Marking	Package	Weight	Base qty	Delivery mode
STTH6002CW	STTH6002CW	TO-247	4.46 g	30	Tube

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.

All other names are the property of their respective owners.

© 2004 STMicroelectronics - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany -  
 Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain -  
 Sweden - Switzerland - United Kingdom - United States

[www.st.com](http://www.st.com)

