


This is a controlled document. Hardcopy to be endorsed by authorised person. Check with Issuing Officer or SAP system for latest update.

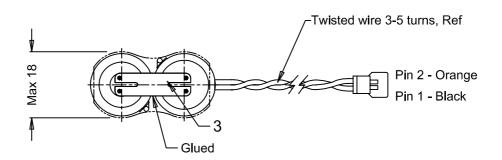

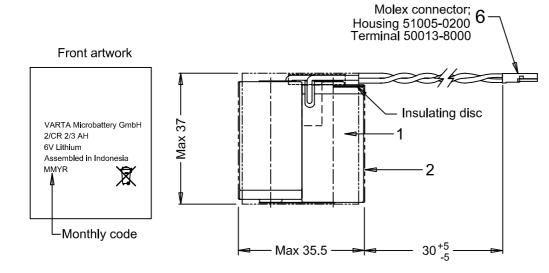

## Rear artwork

Warning: Risk of fire, explosion or burns. Do not recharge, disassemble, crush, heat above 212°F (100°C) or incinerate.

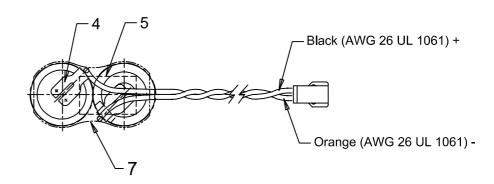

Note: 1) Battery is totally insulated

## 2) Battery with non-Standard polarity

TitisWS 11-R071 Change date code from MMYY to MMYR 2011-06-03 3 R157/08 2008-04-25 Eka To add in printed sleeve the crossed-out wheeled bin symbol C092/05 2005-09-26 TitisWS Wire Orange was White

2 1 Refer to provisional drawing #P26-00049 Rev.000 0 T051/04 2004-08-27 Lutfi AO No Revisions Date Name Material: Description:

2/CR2/3AH L S WC Refer to part list no: 074693 Projection: with sleeve & wire connector Dimensions in mm Prepared & Checked Verified & Approved 074693 Dwg. No: 4|0|3 Tolerance: As specified 2004-Lutfi 08-02 VKB Order No: 06215 202 012 1:1 Scale:

Rights reserved to make technical changes, as a result of further development, without notice. This drawing is the property of VARTA Microbattery

and must not be copied or disclosed to a third party without the written consent of VARTA Microbattery.

**□VART** 

Approx wt.: 34 g