




Data sheet p13 Implant

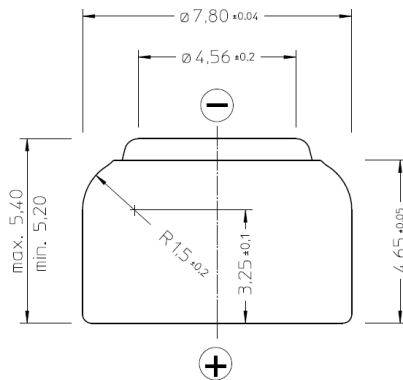

Specifications:

Chemical system:	Zinc / Air
Nominal voltage:	1.45 V
Standard Capacity:	290 mAh**
High Rate Pulse Capacity:	280 mAh*
High Rate Pulse Energy:	340 mWh*
Impedance:	max. 6 Ω@ 1kHz
Weight:	approx 0.85 g
Volume:	approx 0.26 ccm
Storage:	10-30° C / 20-80 % r.h.
Operating:	0-45° C / 25-70 % r.h.
Short Exposition:	-10-65° C / 5-95 % r.h.


*IEC High Power to 1.05 V at 21° C / 60% r.h.
according to IEC60086-2 Feb. 2011 (12th Edition)

**1500 Ohms 12h/day to 1.1V at 21° C / 60% r.h.

Dimensions:

According IEC60086-2 Feb. 2011 (12th Edition)
IEC: PR48

Typical discharge characteristics at 21° C / 60% r.H.:

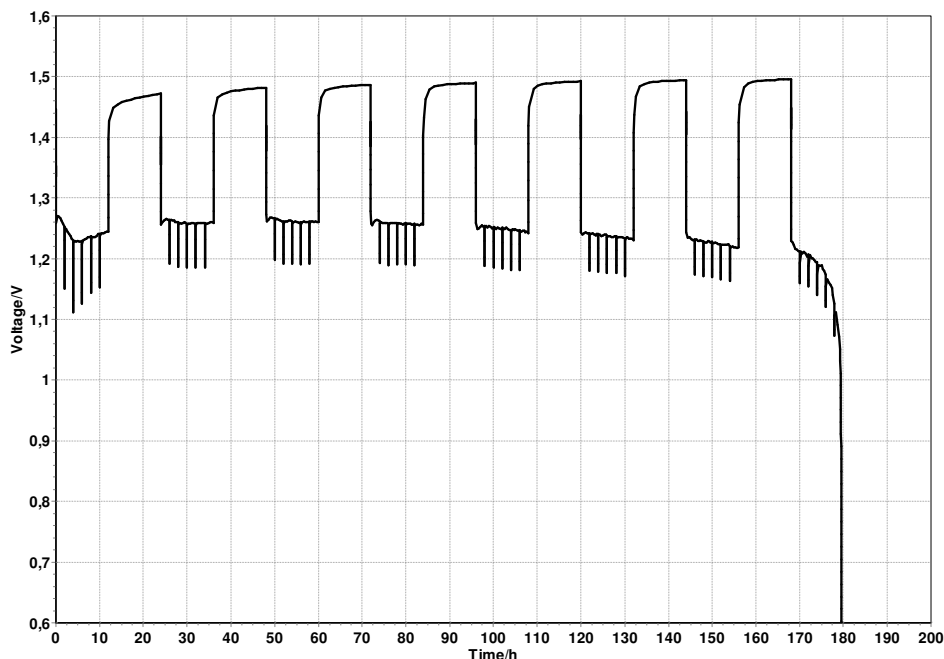

VARTA Microbattery GmbH
Daimlerstraße 1
D 73479 Ellwangen
Tel.: +49 7961 921 0
www.varta-microbattery.com

This data is subject to change without prior notice. Performance information is typical. Contact VARTA for latest information. October 2013