

# CHIP TYPE

**CE** Series

Aluminum Electrolytic Capacitor  
Surface Mounted Device

JAMICON®

## Features

- Height:5.4mm.
- Load life:105°C, 1000hours.
- Low leakage current (0.5 $\mu$ A to 2.0 $\mu$ A max.)




## SPECIFICATION

Item	Characteristic						
Operation Temperature Range	-40 ~ +105°C						
Rated Working Voltage	6.3 ~ 50VDC						
Capacitance Tolerance (120Hz 20°C)	$\pm 20\%$ (M)						
Leakage Current (20°C)	$I \leq 0.002CV$ or 0.5 ( $\mu$ A)					I : Leakage Current ( $\mu$ A)	
	*Whichever is greater after 2 minutes					C : Rated Capacitance ( $\mu$ F)	
Surge Voltage (20°C)	W.V.		6.3	10	16	25	35
	S.V.		8	13	20	32	44
Dissipation Factor (tan $\delta$ ) (120Hz 20°C)	W.V.		6.3	10	16	25	35
	tan $\delta$		0.24	0.20	0.16	0.14	0.12
Low Temperature Stability	Impedance ratio at 120Hz						
	Rated Voltage (V)		6.3	10	16	25	35
	-25°C / +20°C		4	3	2	2	2
	-40°C / +20°C		8	6	4	4	3
Load Life	After 1000 hours application of W.V. and +105°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage $\leq$ rate working voltage)						
	Capacitance Change	$\leq \pm 25\%$ of initial value					
	Dissipation Factor	$\leq 200\%$ of initial specified value					
	Leakage current	$\leq$ initial specified value					
Shelf Life		At +105°C, no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (With voltage treatment)					
Resistance to Soldering Heat		Capacitor placed on a 250°C hot plate for 30 seconds with their electrode terminals facing downward will fulfill the following conditions after being cooled to room temperature.					
		Capacitance Change	$\leq \pm 10\%$ of initial value				
		Dissipation Factor	$\leq$ initial specified value				
		Leakage current	$\leq$ initial specified value				

## DIMENSIONS (mm)

D	L	A	H	I	W	P	K
4.0	5.4	4.3	5.5MAX	1.8	$0.65 \pm 0.1$	1.0	$0.35^{+0.15}_{-0.20}$
5.0	5.4	5.3	6.5MAX	2.2	$0.65 \pm 0.1$	1.5	$0.35^{+0.15}_{-0.20}$
6.3	5.4	6.6	7.8MAX	2.6	$0.65 \pm 0.1$	2.1	$0.35^{+0.15}_{-0.20}$

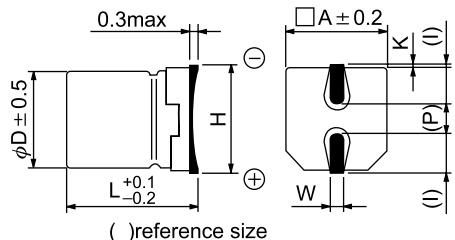

## ● CASE SIZE &amp; MAX RIPPLE CURRENT

Case size : D x L (mm)  
 Max ripple current : mA(rms) 105°C 120Hz

$\mu\text{F}$	V(Code)	6.3 (0J)		10 (1A)		16 (1C)		25 (1E)		35 (1V)		50 (1H)	
		DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1	0R1											4x5.4	3
0.22	R22											4x5.4	4
0.33	R33											4x5.4	5
0.47	R47											4x5.4	5
1.0	010											4x5.4	8
2.2	2R2											4x5.4	12
3.3	3R3											4x5.4	14
4.7	4R7							4x5.4	14	4x5.4	15	5x5.4	19
10	100					4x5.4	20	5x5.4	24	5x5.4	26	6.3x5.4	32
22	220	4x5.4	24	5x5.4	30	5x5.4	33	6.3x5.4	41	6.3x5.4	44		
33	330	5x5.4	33	5x5.4	36	6.3x5.4	46	6.3x5.4	50				
47	470	5x5.4	39	6.3x5.4	50	6.3x5.4	55						
100	101	6.3x5.4	65	6.3x5.4	70								