
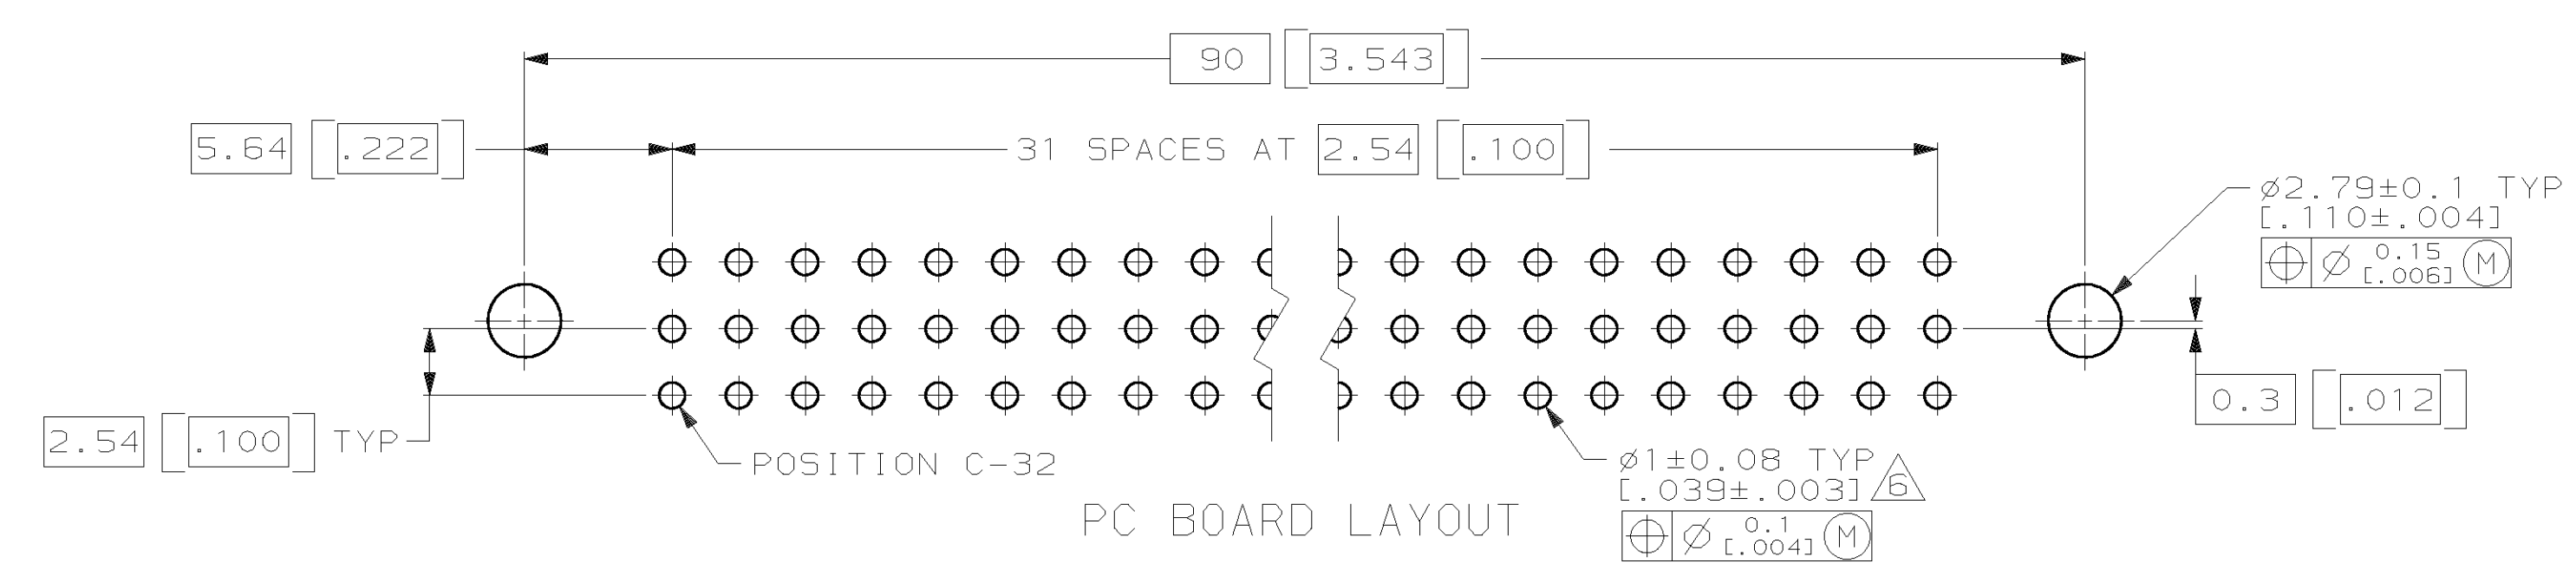
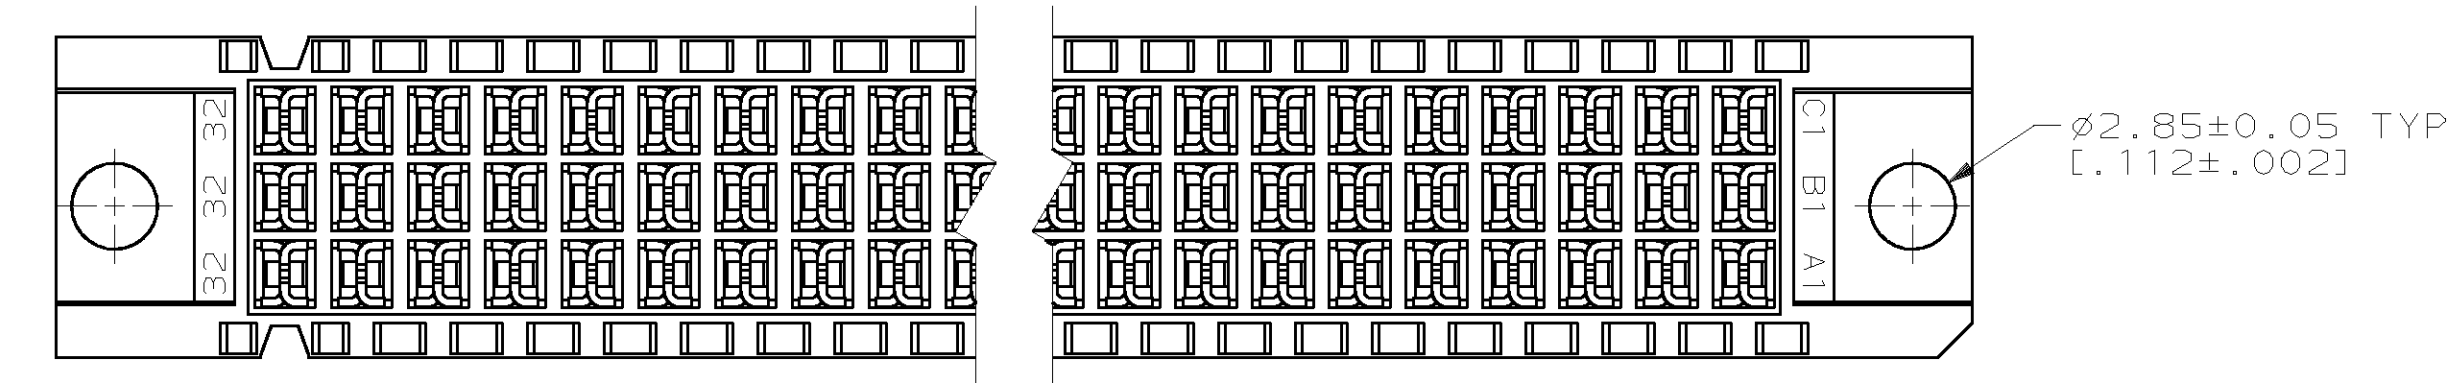
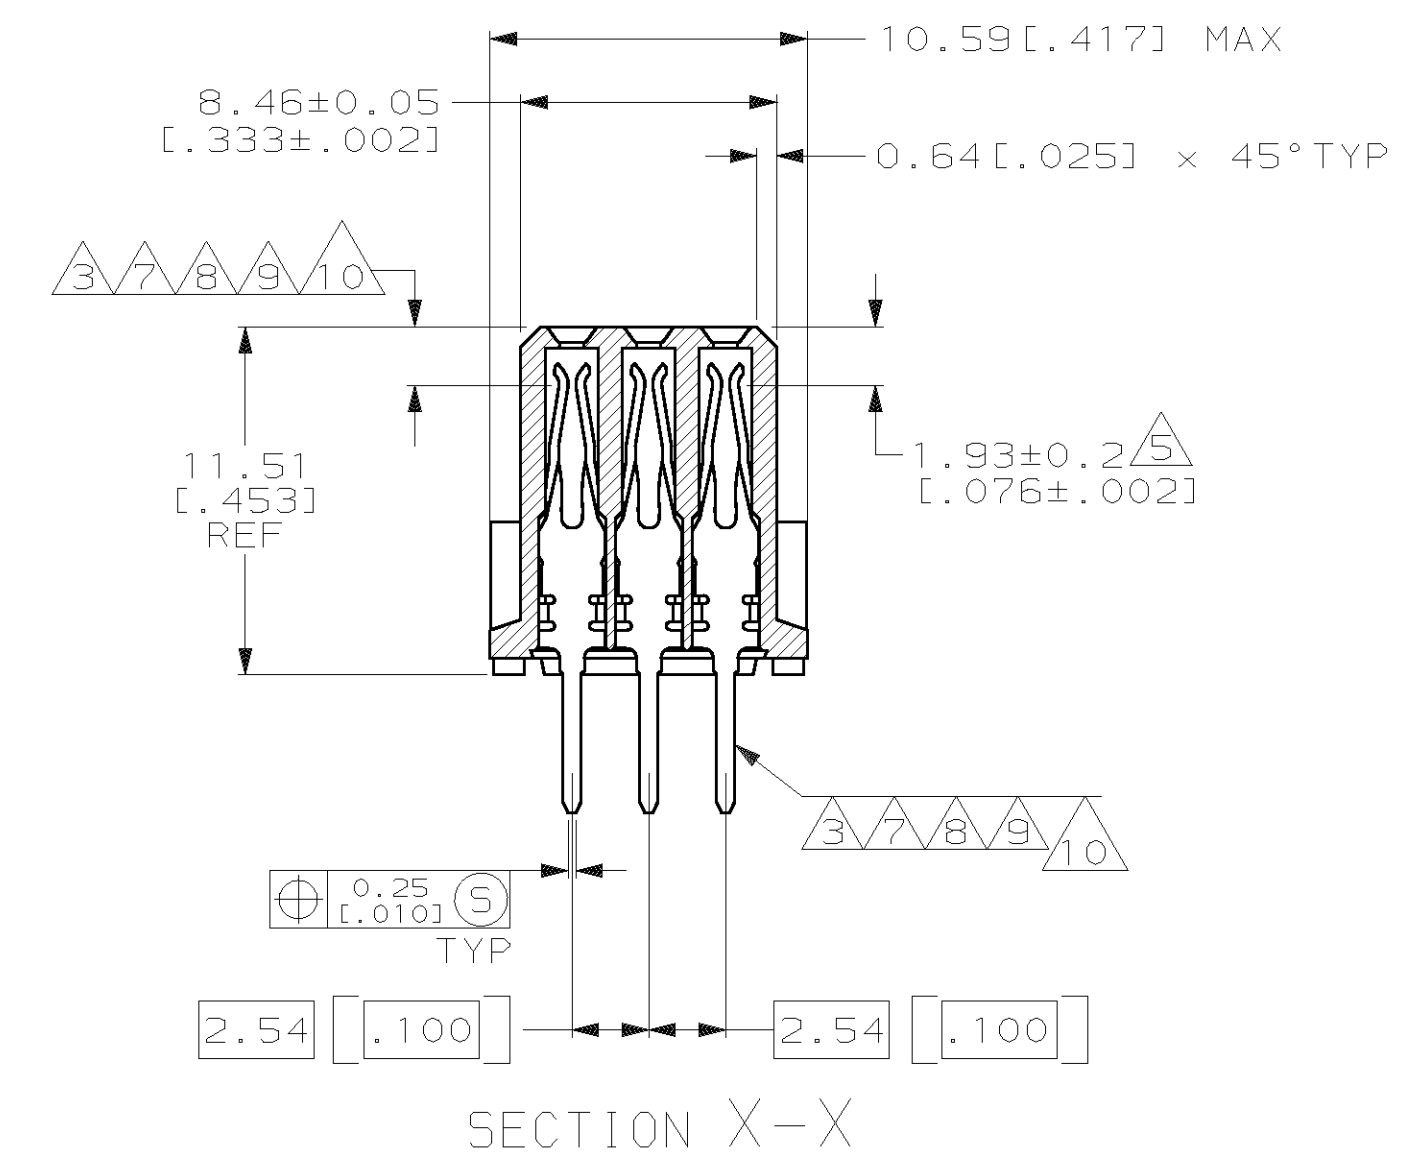
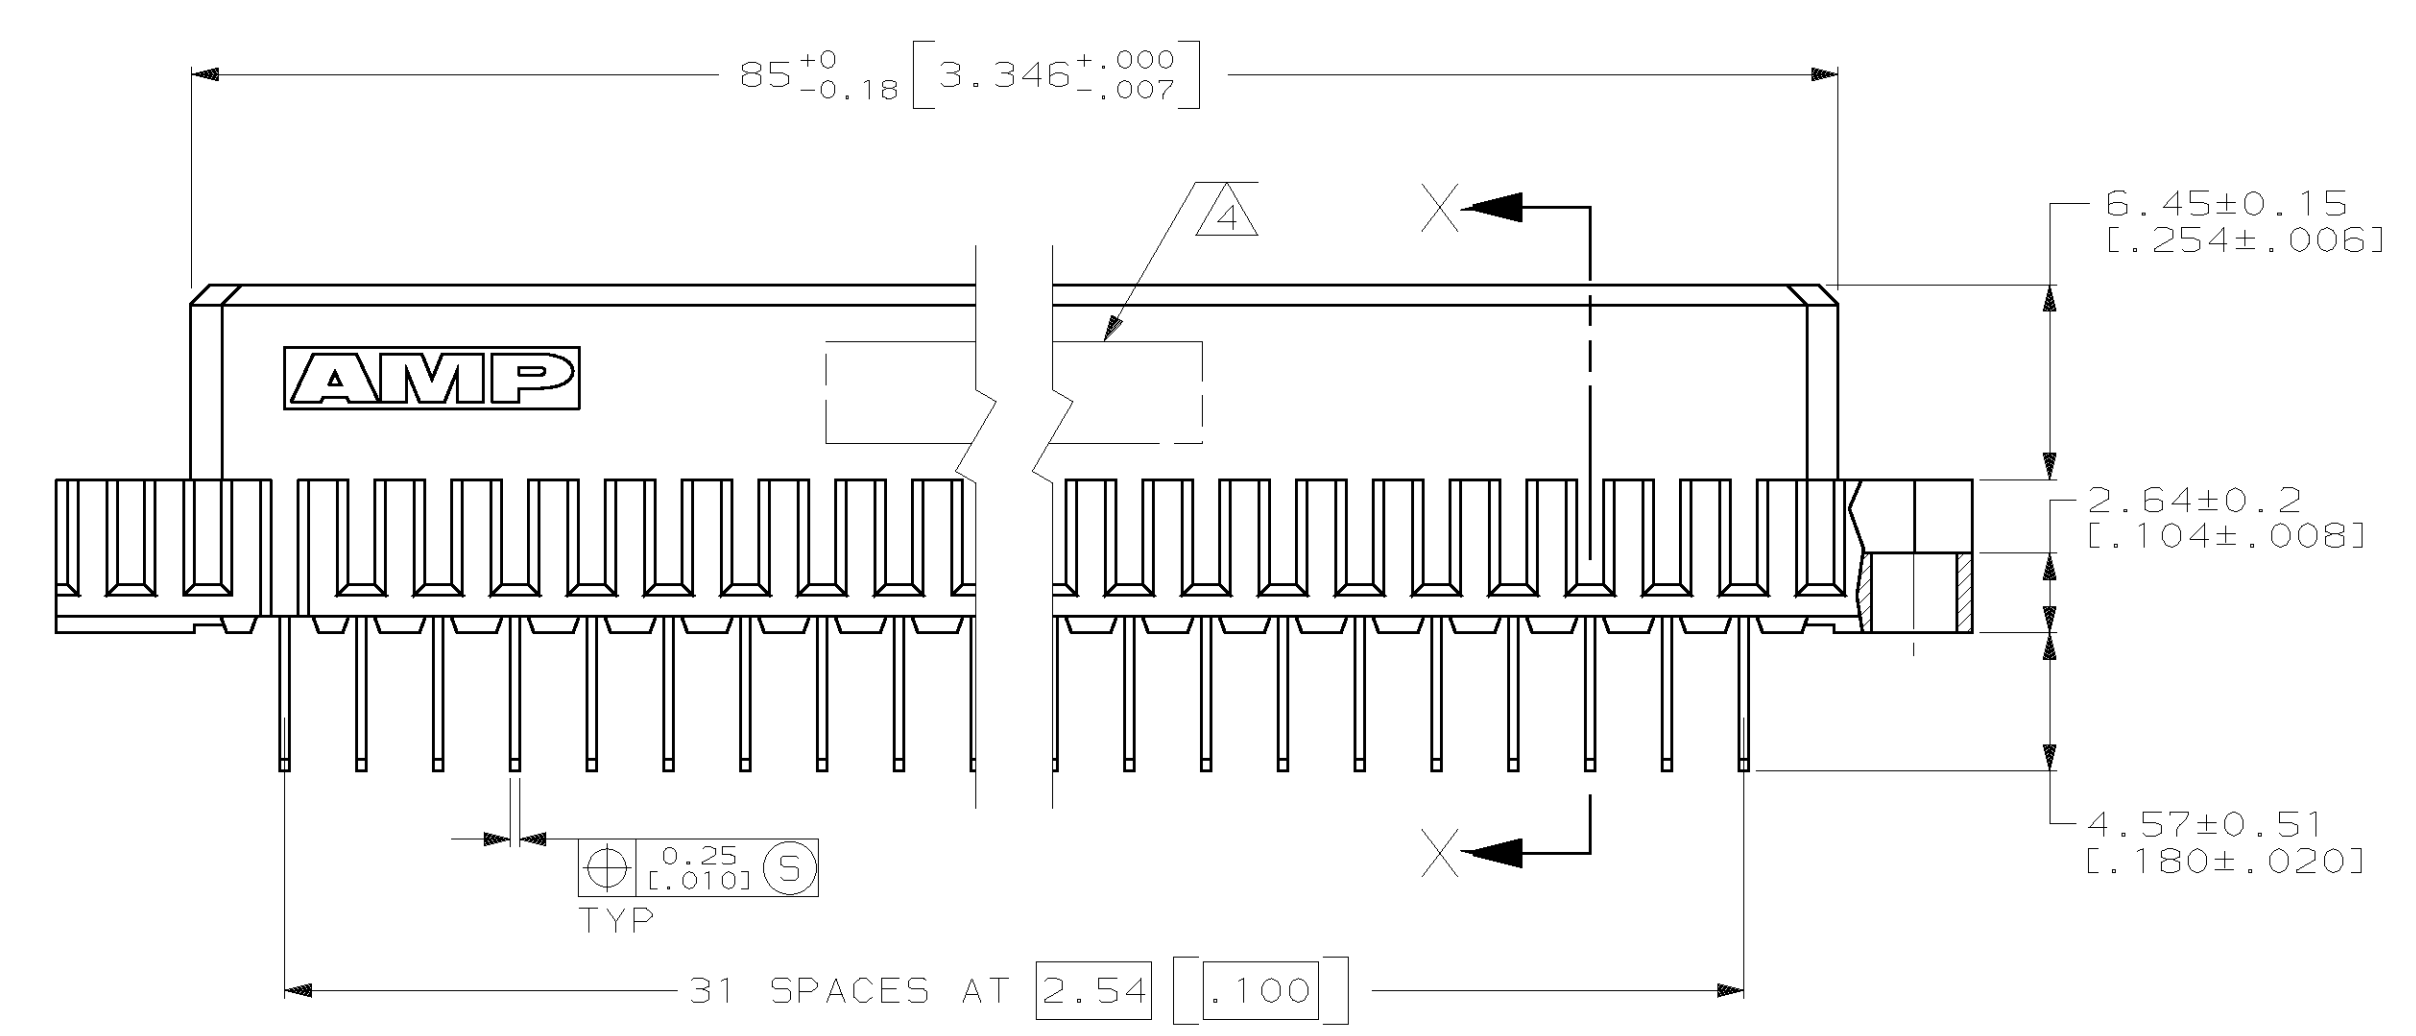


LOC	DIST	P	F	ZONE	LTR	REVISIONS		
						DESCRIPTION	DATE	APPD
					K	REVISED PER 0503-0580-97	9-30-97	JG
					L	ADDED -6 PER EC 0U1B-0066-99	30 JUL 99	CR
					M	REV PER EC 0U1B-0367-00	04 JAN 01	CR
					N	REV PER EC 0512-0016-03	11DEC03	AS

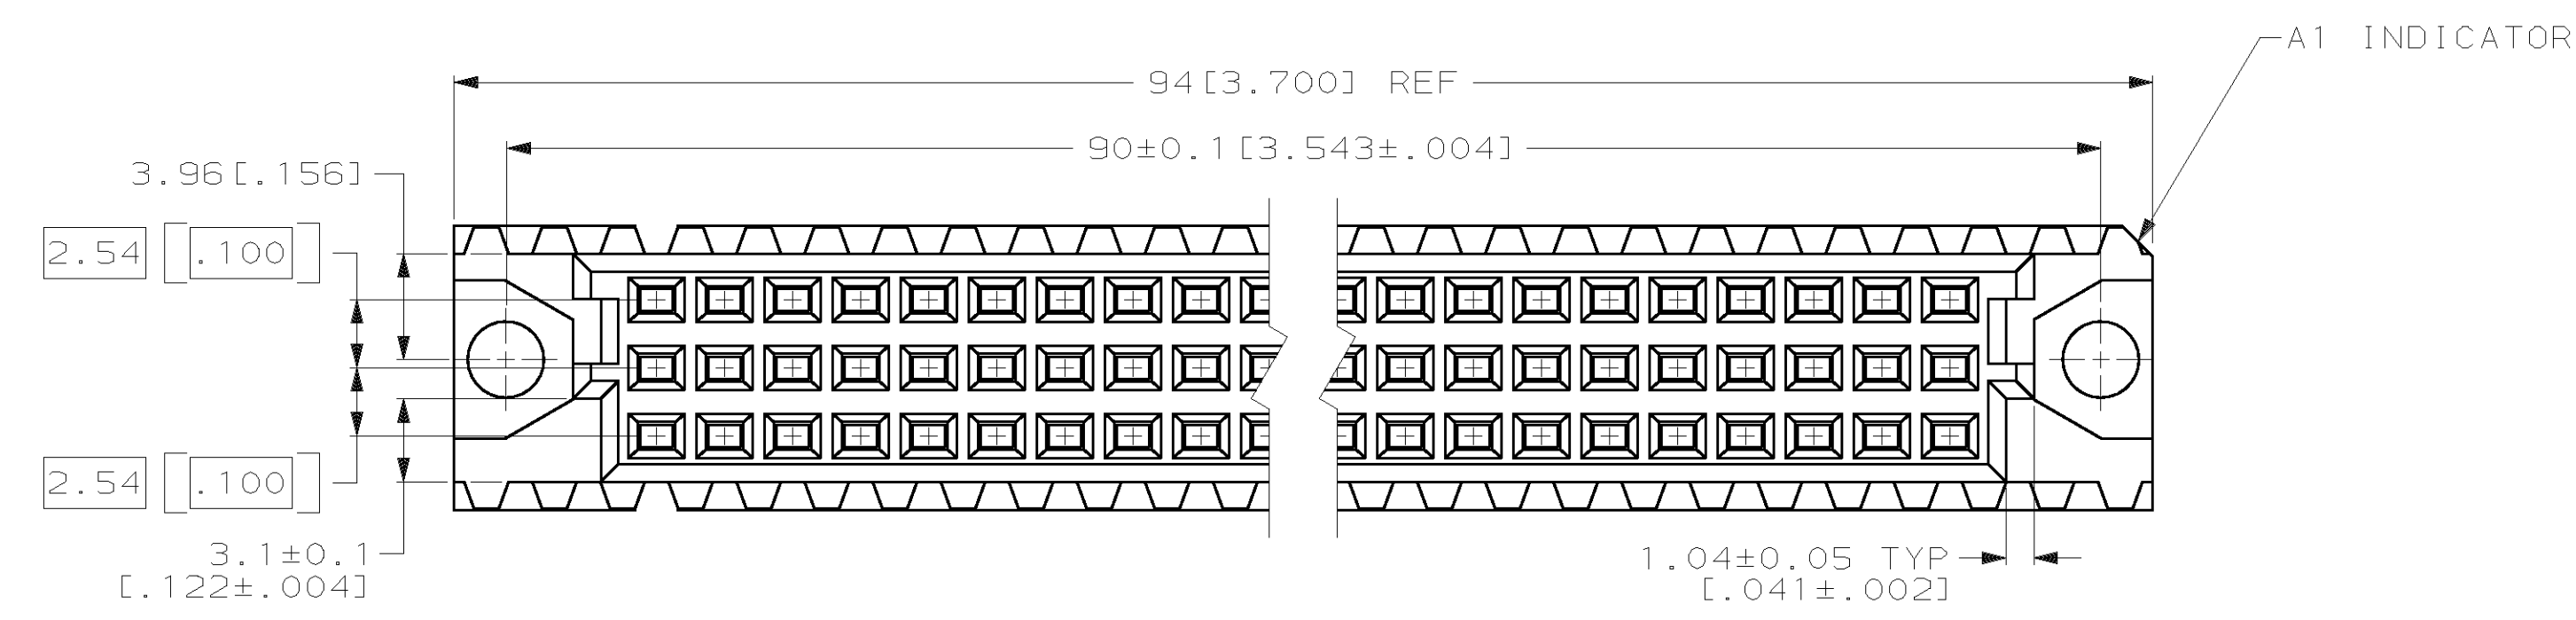

- 1 HOUSING MATERIAL: GLASS-FILLED POLYESTER. COLOR: GRAY.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3 CONTACT FINISH: 0.00076 [0.00030] GOLD IN CONTACT AREA. 0.00127 [0.00050] NICKEL UNDERPLATE ALL OVER. TIN-LEAD ON POSTS.
- 4 PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA, ON REVERSE SIDE.
- 5 POINT OF MEASUREMENT FOR GOLD.
- 6 RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- 7 CONTACT FINISH: 0.00127 [0.00050] GOLD IN CONTACT AREA. 0.00127 [0.00050] NICKEL UNDERPLATE ALL OVER. TIN-LEAD ON POSTS.
- 8 CONTACT FINISH: DIN 41612 CLASS 3 IN CONTACT AREA. TIN-LEAD ON POSTS.
- 9 CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN-LEAD ON POSTS.
- 10 CONTACT FINISH: GOLD FLASH OVER 1.02µm [0.00040] MIN PALLADIUM/NICKEL IN CONTACT MATING AREA, ALL OVER 1.27µm [0.00050] MIN NICKEL. TIN-LEAD ON TAILS.

NOTE	POSITIONS LOADED	ROWS LOADED			NO. OF LOADED POSITION	ASSY PART NUMBER
		C	B	A		
OBSOLETE	1 THRU 32	X	X	X	96	535043-9
OBSOLETE	1 THRU 32	X	X	X	96	535043-6
OBSOLETE	1 THRU 32	X	X	X	96	535043-5
OBSOLETE	1 THRU 32	X	X	X	96	535043-4
OBSOLETE	1 THRU 32	X	X	X	96	535043-1

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES]. TOLERANCES ON:

DR	L. BRINER	12/6/88
CHK	R. PATTERSON	12/5/93
APPD	R. PATTERSON	12/5/93
APPD	R. PATTERSON	12/5/93

AMP INCORPORATED  
 Harrisburg, Pa. 17105

ASSEMBLY, RECEPTACLE, EUROCARD, TYPE C, SOLDER TAIL, 96 POSITION

SIZE	FSCM NO	DRAWING NO
D	00779	535043
SCALE	4:1	SHEET 1 OF 1