


1N6373 thru 1N6377 & 1N6382 thru 1N6385 TRANSZORB® Transient Voltage Suppressors

Stand Off Voltage 5.0 to 15V
Peak Pulse Power 1500W

Case Style 1.5KE

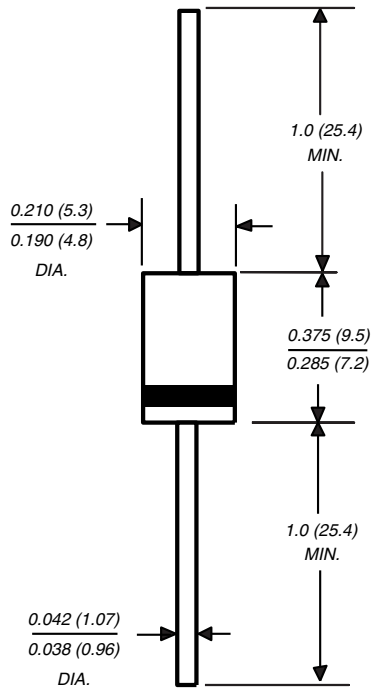

Dimensions in inches and (millimeters)

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junction
- 1500W peak pulse power capability with a 10/1000 μ s waveform, repetition rate (duty cycle): 0.05%
- Excellent clamping capability
- Low incremental surge resistance
- Very fast response time
- Ideal for data and bus line applications
- High temperature soldering guaranteed: 265°C/10 seconds, 0.375" (9.5mm) lead length, 5lbs. (2.3 kg) tension
- Includes 1N6373 thru 1N6385

Mechanical Data

Case: Molded plastic body over passivated junction

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: For unidirectional types the color band denotes the cathode, which is positive with respect to the anode under normal TVS operation

Mounting Position: Any

Weight: 0.045oz., 1.2g

Packaging Codes – Options (Antistatic):

51 – 1K per Bulk box, 10K/carton

54 – 1.4K per 13" paper Reel
(52mm horiz. tape), 4.2K/carton

73 – 1K per horiz. tape & Ammo box, 10K/carton

Maximum Ratings and Thermal Characteristics (T_A = 25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Peak pulse power dissipation with a 10/1000 μ s waveform ⁽¹⁾ (Fig. 1)	P _{PPM}	Minimum 1500	W
Peak pulse current with a 10/1000 μ s waveform ⁽¹⁾ (Fig. 3)	I _{PPM}	See Table 1 & 2	A
Steady state power dissipation, T _L = 75°C, at lead lengths 0.375" (9.5mm)	P _{M(AV)}	6.5	W
Peak forward surge current, 8.3ms single half sine-wave unidirectional only ⁽²⁾	I _{FSM}	200	A
Maximum instantaneous forward voltage at 100A for unidirectional only	V _F	3.5	V
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +175	°C

Notes: (1) Non-repetitive current pulse, per Fig.3 and derated above T_A = 25°C per Fig. 2

(2) 8.3ms single half sine-wave, duty cycle = 4 pulses per minute maximum

1N6373 thru 1N6377 & 1N6382 thru 1N6385 TRANSZORB® Transient Voltage Suppressors

Electrical Characteristics (JEDEC Registered Data) Table 1 – Unidirectional Types

Ratings at 25°C ambient temperature unless otherwise specified.

JEDEC Type Number	General Semiconductor Part Number	Stand-Off Voltage V _{WM} (V)	Minimum ⁽³⁾ Breakdown Voltage at 1.0mA V _(BR) (V)	Maximum Reverse Leakage at V _{WM} I _D (μA)	Maximum Clamping Voltage at I _{PP} = 1.0A V _C (V)	Maximum Clamping Voltage at I _{PP} = 10A V _C (V)	Maximum Peak Pulse Current I _{PP} (A)
1N6373 ⁽²⁾	ICTE-5 ⁽²⁾	5.0	6.0	300	7.1	7.5	160
1N6374	ICTE-8	8.0	9.4	25.0	11.3	11.5	100
1N6375	ICTE-10	10.0	11.7	2.0	13.7	14.1	90
1N6376	ICTE-12	12.0	14.1	2.0	16.1	16.5	70
1N6377	ICTE-15	15.0	17.6	2.0	20.1	20.6	60

Electrical Characteristics (JEDEC Registered Data) Table 1 – Bidirectional Types

Ratings at 25°C ambient temperature unless otherwise specified.

JEDEC Type Number	General Semiconductor Part Number	Stand-Off Voltage V _{WM} (V)	Minimum ⁽³⁾ Breakdown Voltage at 1.0mA V _(BR) (V)	Maximum Reverse Leakage at V _{WM} I _D (μA)	Maximum Clamping Voltage at I _{PP} = 1.0A V _C (V)	Maximum Clamping Voltage at I _{PP} = 10A V _C (V)	Maximum Peak Pulse Current I _{PP} (A)
1N6382	ICTE-8C	8.0	9.4	50.0	11.4	11.6	100
1N6383	ICTE-10C	10.0	11.7	2.0	14.1	14.5	90
1N6384	ICTE-12C	12.0	14.1	2.0	16.7	17.1	70
1N6385	ICTE-15C	15.0	17.6	2.0	20.8	21.4	60

Notes:

- (1) " C " Suffix indicates bi-directional
- (2) ICTE-5 and 1N6373 are not available as bi-directional
- (3) The minimum breakdown voltage as shown takes into consideration the ±1 Volt tolerance normally specified for power supply regulation on most integrated circuit manufacturers data sheets. Please consult factory for devices that require reduced clamping voltages where tighter regulated power supply voltages are employed.
- (4) Clamping Factor: 1.33 at full rated power; 1.20 at 50% rated power; Clamping Factor: the ratio of the actual V_C (Clamping Voltage) to the V_(BR) (Breakdown Voltage) as measured on a specific device.

1N6373 thru 1N6377 & 1N6382 thru 1N6385 TRANSZORB[®] Transient Voltage Suppressors

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted.)

Fig. 1 – Peak Pulse Power Rating Curve

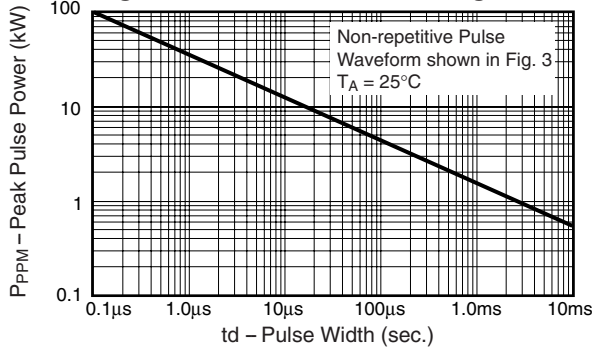


Fig. 2 – Pulse Derating Curve

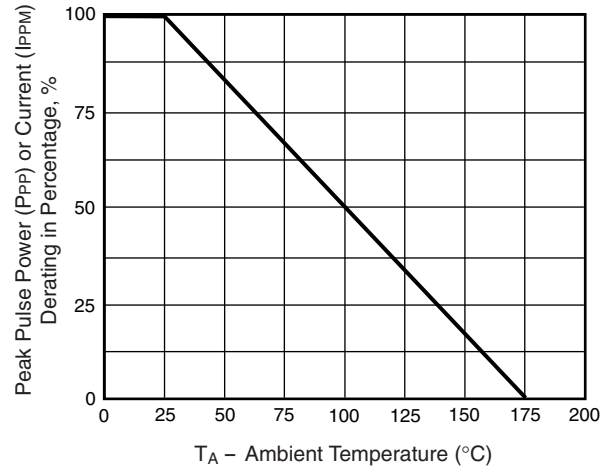


Fig. 3 – Pulse Waveform

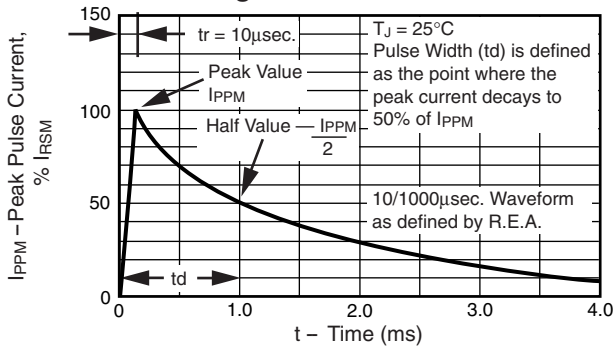


Fig. 4 – Typical Junction Capacitance Uni-Directional

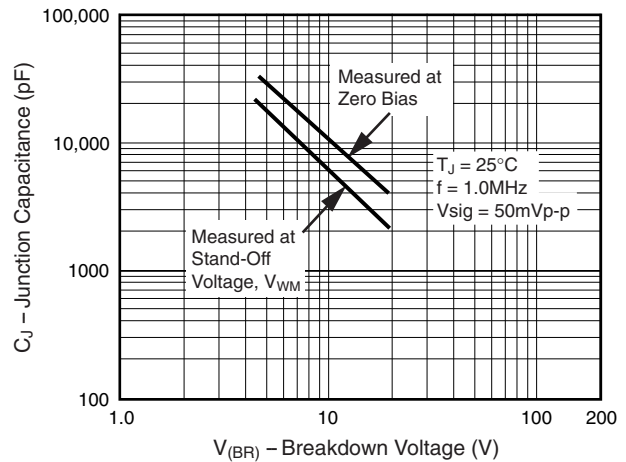


Fig. 5 – Typical Junction Capacitance Bidirectional Type

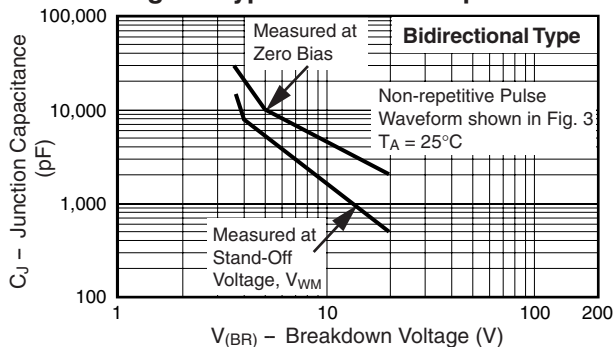


Fig. 6 – Maximum Non-Repetitive Forward Surge Current Uni-Directional Only

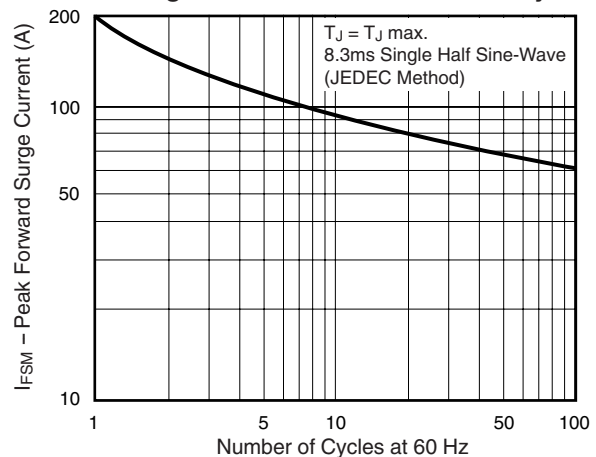


Fig. 7 – Typical Characteristics Clamping Voltage

