



FEATURES


- High Power Density
- Over 500,000 cycle life (semi-permanent)
- 2 units serially connected to provide 6.0V products
- RoHS compliant
- Long-term reliability improved at high temperature and humidity




Drawing

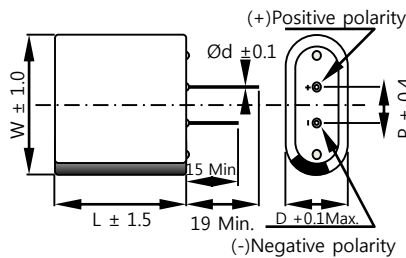

I TYPE

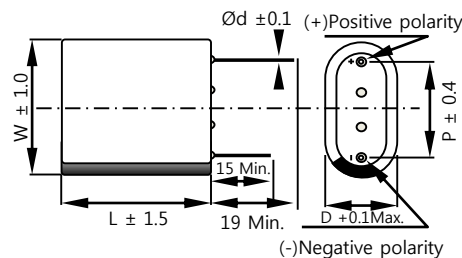

O TYPE

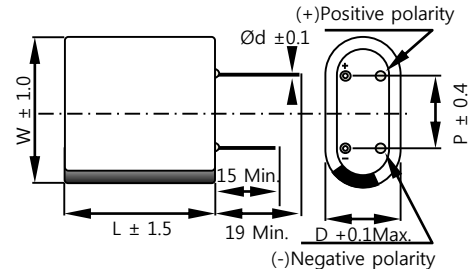

H TYPE

D = 10.5mm, d = 0.6mm

TYPE	I	O	H
P	5.0	16.0	10.5

(Unit : mm)

SPECIFICATION

ITEM		CHARACTERISTICS						
Product series		EDLC 2 SERIAL MODULE						
Rated Voltage (V_R)		6.0V						
Operating Temperature		-40 ~ +65°C						
Capacitance Tolerance		-10 ~ +30%						
High Temperature Load Life		After 1,000 hours at V_R loaded under +65°C, capacitors meet the following criteria.						
		Capacitance Change		≤ 30% of initial value				
		ESR		≤ 2 times of specified value				
Cycle Life Characteristics		85°C Temperature		Max. 4.8V				
		Cycle	Over 500,000					
		ΔC	≤ 30% of initial value					
		ESR	≤ 2 times of specified value					
Method		Cycle of Charge/discharge from V_R to $1/2V_R$						
Shelf Life		3 Years						
		No Electrical Charge, Temperature below 25°C (ΔC : ≤ 10% of initial value / ΔESR : ≤ 50% of specified value)						
Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (mA, 72hr)		Size (mm) D x W x L
			AC(1kHz)	DC		@5.4V	@6.0V	
WEC6R0505QG	6.0	5.0	65	95	10.0	0.020	0.030	10.5x21x32

* Max. Current : 1 sec. discharge to $1/2V_R$

* When do module more than 2 series, please fully discharge over 1 hour first, then assemble right after within 1 hour.